

PRODUCT CATALOGUE



An aerial photograph of a large, white, arched bridge spanning a wide, turquoise lake. The bridge has a black asphalt road on top. The surrounding landscape is lush with green trees and vegetation. The sky is a clear, vibrant blue. The text is overlaid on the upper left portion of the image.

Together We Develop A Better Future

PT Gunung Raja Paksi Tbk



Table of contents

3 Who we are

5 Production Workflow

9 Long Products

11 Angle (Hot Rolled)

14 H-Beam

15 Wide Flange

17 Flat Products

19 Steel Plate

31 Hot Rolled Coil

37 Coil Plate

41 Downstream Products

43 Cold Roll Coil

44 Cut to Shape

45 Welded Beam

47 Spiral Pipe

49 Lipped Channel

51 ERW Pipe

61 Expanded Mesh

63 Drawn Wire

64 Wire Mesh

65 Service Center

69 Steel Application

73 Certification



Who We Are

A to Z Under One Roof, our company was established in 1970 under the name PT Gunung Raja Paksi Tbk (GRP)

PT Gunung Raja Paksi Tbk has proven its capabilities by expanding into a wider range of steel products and this has PT Gunung Raja Paksi, as one of leading steel producers in Indonesia.

The commissioning of our first hot rolled steel machine was in the last quarter of the year 2000. GRP always emphasize foremost on professional performances through the in-Depth experience & accompanied by comprehensive approach in our efforts to provide the best services and the best possible value-added products. This ensures that we are able to meet the needs of our customer no matter how complicate it may be. Among the products range consist of flat, coils, welded pipe, decking and wire steel products.

GRP has ability to process the basic materials further and expands its products line into a variety of light fabricated products to suit specific requirement.

The services we provide are:

Forming Services Center
Bar Services Center
Steel Services Center
Plate Services Center
Coil Services Center





The background of the slide is a photograph of an industrial setting, likely a factory or warehouse, showing various metal structures and equipment. A large, solid red diagonal shape cuts across the image from the top-left towards the bottom-right, creating a high-contrast, modern aesthetic.

Production Workflow

Production Workflow

Integrated Workflow of PT Gunung Raja Paksi Tbk

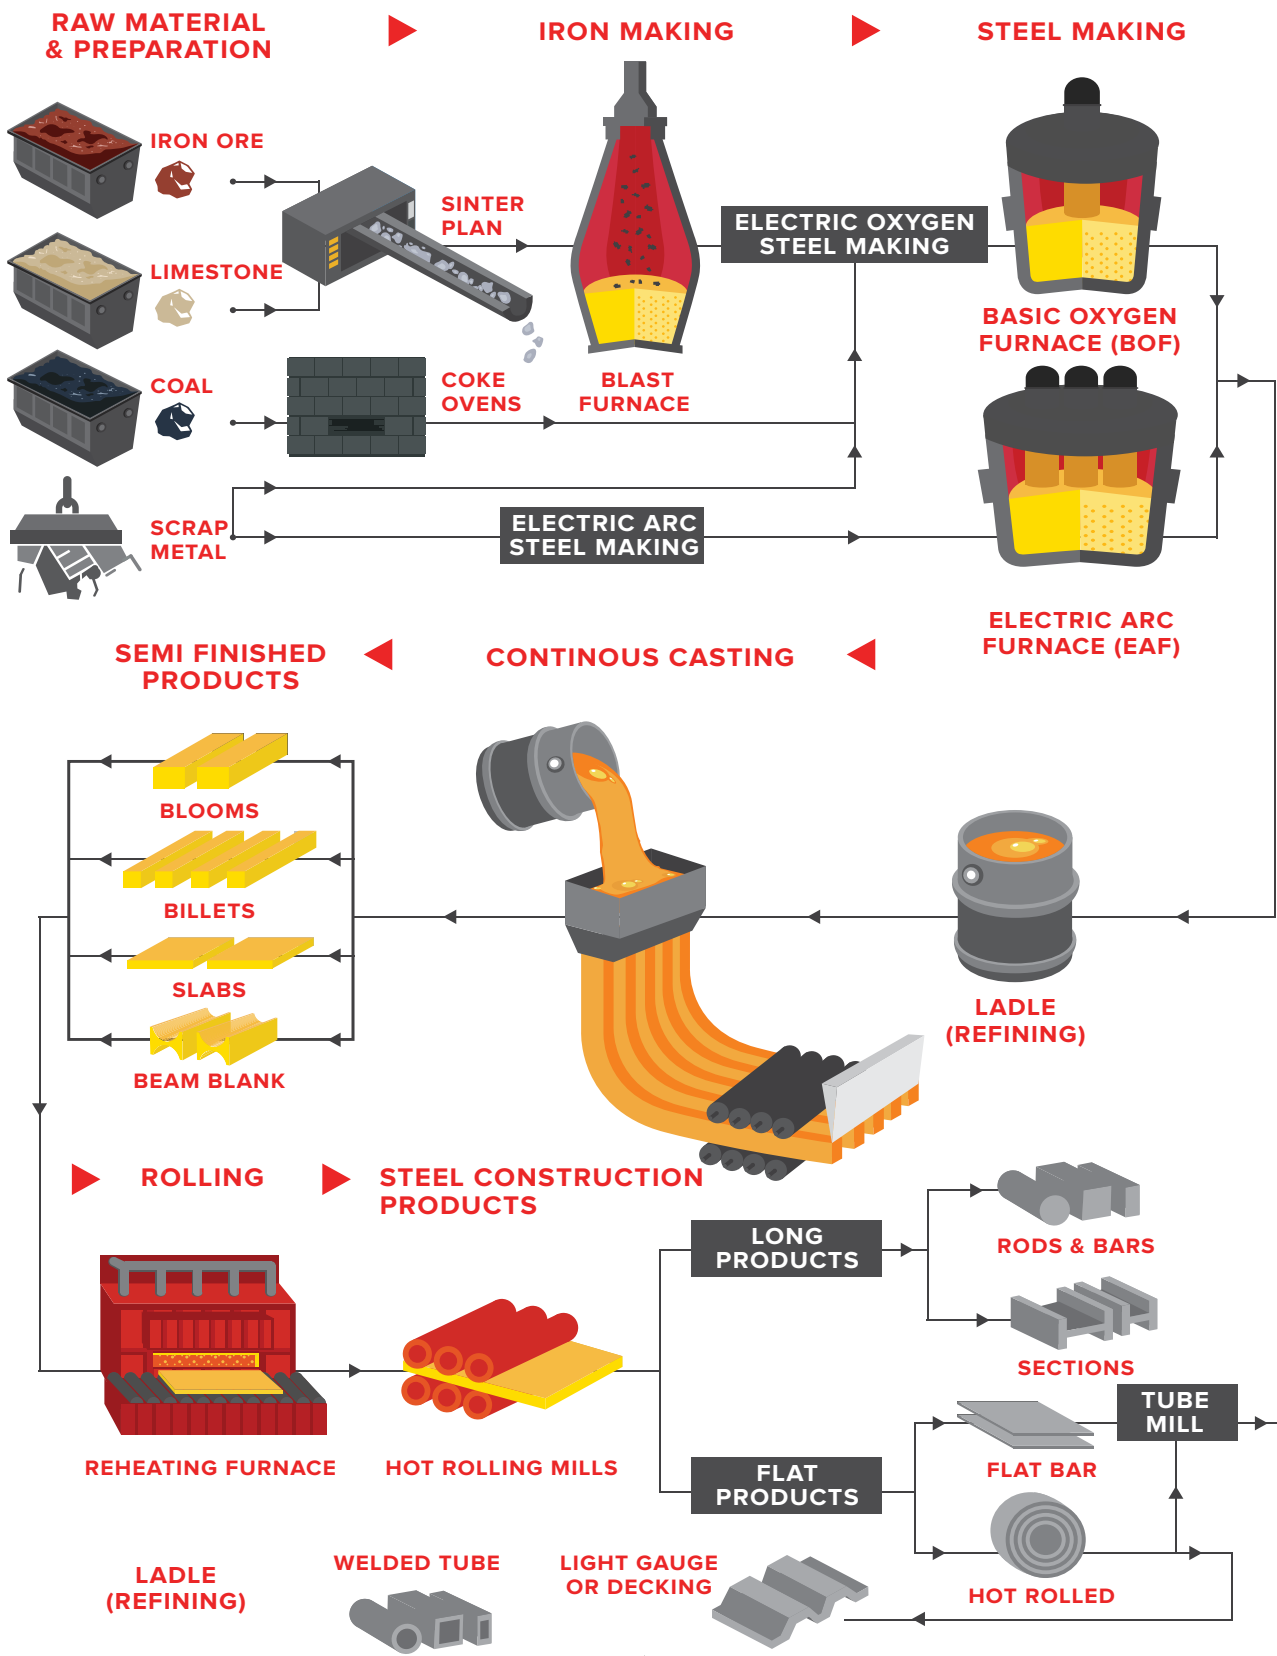

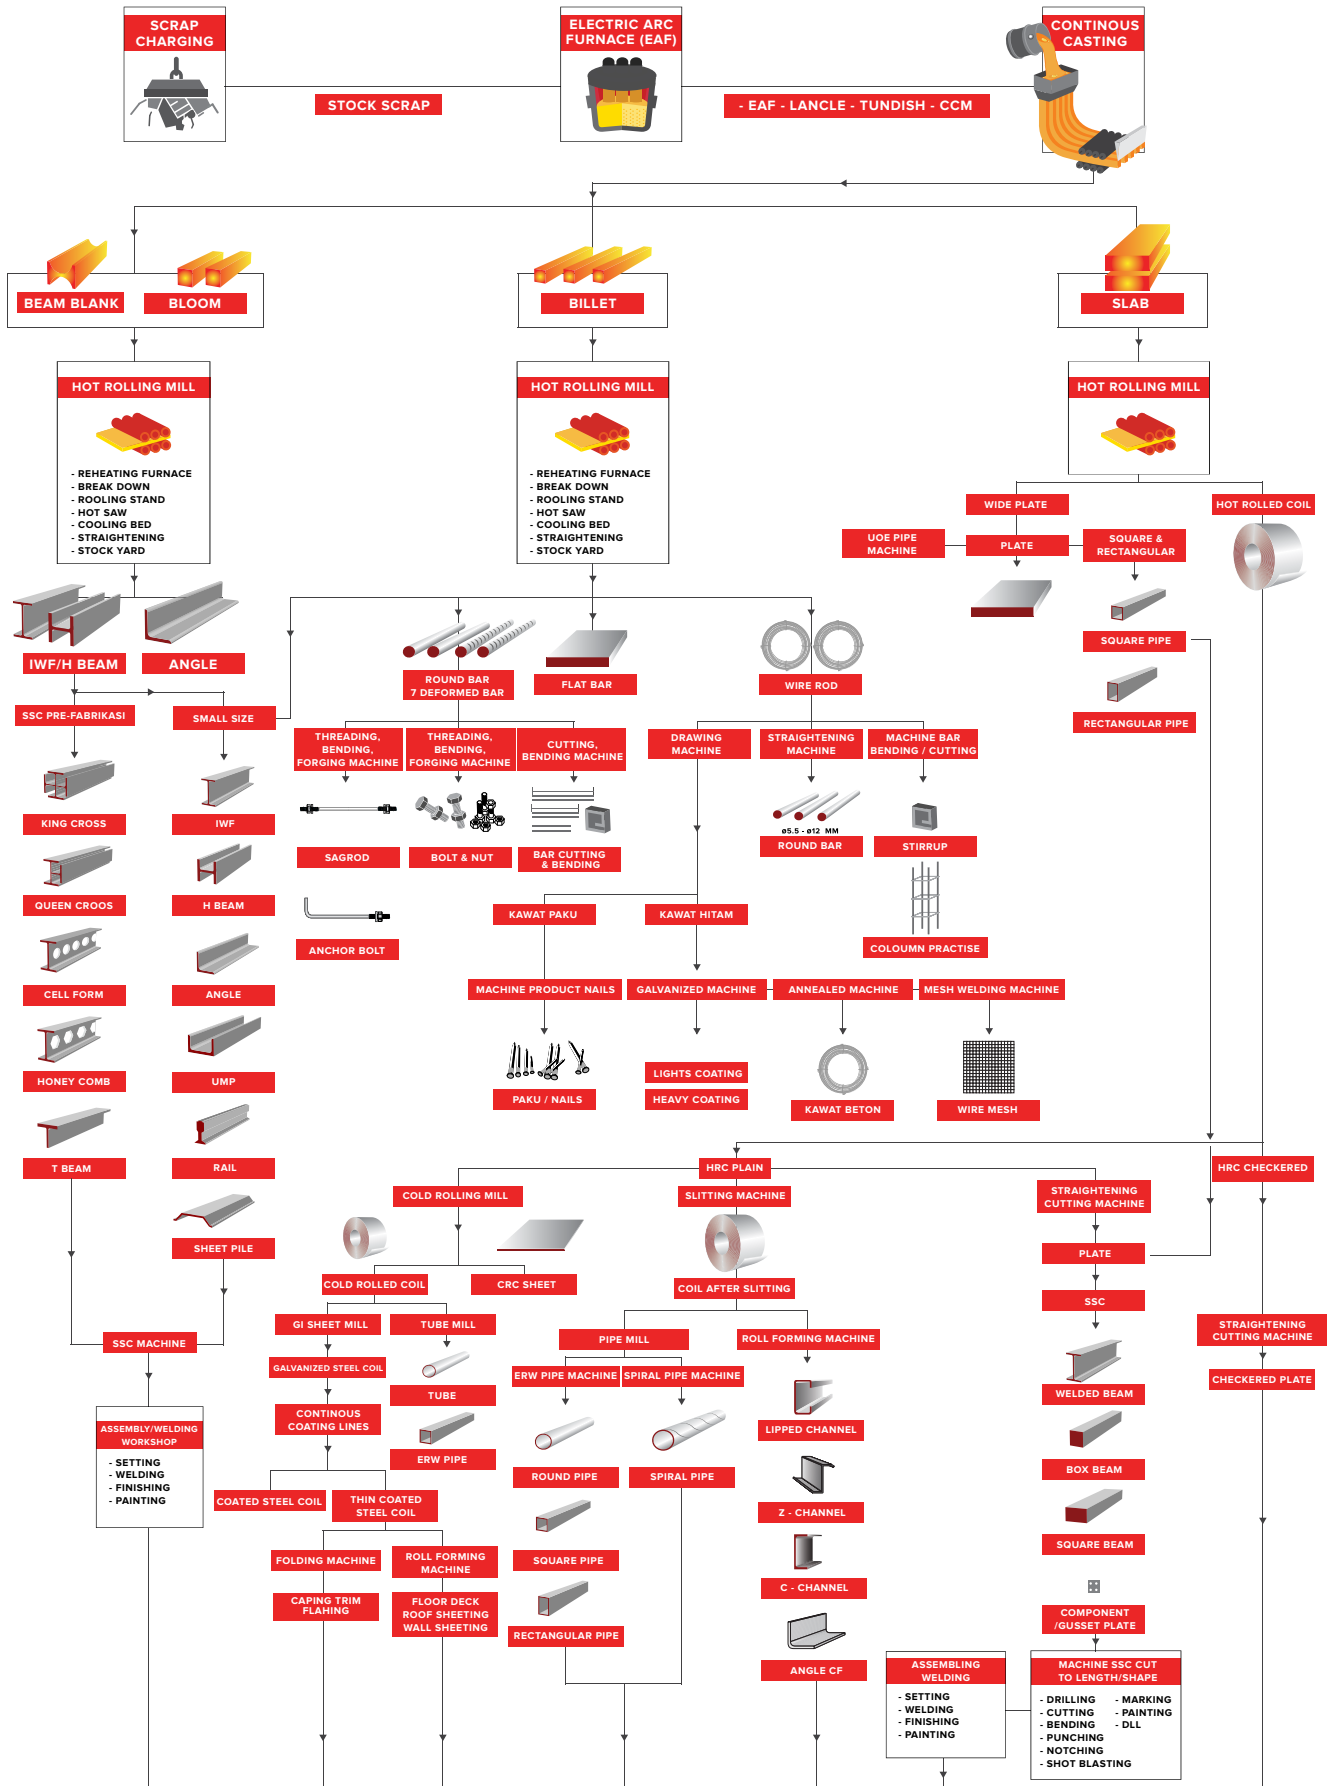



Our production products consist of various sizes according to international standards and include all kinds of structural parts, profiles and reinforcement rods.

Angle (Hot Rolled)

H-Beam

Wide Flange

Long Products



Angle (Hot Rolled)

Steel Angle, an important material for the manufacture of various towers.

Steel Angle is an important structural steel as the material for making communications towers, power towers, various workplaces, and various forms of machinery. The steel can be arranged into different bearing components with different structures. In addition, it can also combine several parts between the components.

Angle belonging to Garuda Garuda is the result of Hot Rolled and is produced using Continous Casting Line and uses repetitive heating. Angle Bar is manufactured with strict quality control controls to ensure consistency and conformity with national and international standards.

**Standard &
Specification:**

Standard JIS G3101 SS400
(Mild Steel) & JIS G3101
SS540 (High Strength)

Available Size:


40x40mm to
250x250mm, Standard
Length: 6mtr & 12mtr,
Thickness: 4mm to 35mm



Annual Capacity:



100.000 MT/Year

Equal Angle

Metric Size

STANDARD SECTIONAL DIMENSIONS						SECTION AREA	UNIT WEIGHT			INFORMATIVE REFERENCE								REMARKS	
										CENTER OF GRAVITY	GEOMETRICAL MOMENT OF INERTIA			RADIUS OF GYRATION OF AREA			MODULUS OF SECTION		
											C _x = C _y	I _x = I _y	Max I _u	Min I _v	i _x = i _y	Max i _u			Min i _v
H	x	B	t	r ₁	r ₂	A	kg/m	kg/6m	kg/12m	cm	cm ⁴	cm ⁴	cm ⁴	cm	Max i _u	Min i _v	cm	cm ³	
40	x	40	4	4.5	2	3.080	2.42	14.52	29	1.090	3.530	5.60	1.460	1.230	1.55	0.79	1.210		
50	x	50	5	6.5	3	4.802	3.77	22.62	45	1.410	11.100	17.50	4.580	1.520	1.91	0.98	3.080		
50	x	50	6	6.5	4.5	5.644	4.43	26.58	53	1.440	12.600	20.00	5.230	1.500	1.88	0.96	3.550		
60	x	60	5	6.5	3	5.802	4.55	27.5	55	1.660	19.600	31.20	8.090	1.840	2.32	1.18	4.520		
60	x	60	6	6.5	3	6.910	5.42	32.5	65	1.700	22.790	36.16	9.420	1.820	2.29	1.17	5.280		
65	x	65	5	8.5	3	6.367	5.00	30	60	1.770	25.300	40.10	10.500	1.990	2.51	1.28	5.350		
65	x	65	6	8.5	4	7.527	5.91	35.5	71	1.810	29.400	46.60	12.200	1.980	2.49	1.27	6.260		
70	x	70	6	8.5	4	8.127	6.38	38.5	77	1.930	37.100	58.90	15.300	2.140	2.69	1.37	7.330		
75	x	75	6	8.5	4	8.727	6.85	41	82	2.060	46.100	73.20	19.000	2.300	2.90	1.48	8.470		
80	x	80	6	8.5	4	9.230	7.32	43.9	88	2.180	56.400	89.60	23.200	2.460	3.10	1.58	9.700		
90	x	90	7	10	5	12.220	9.59	57.6	115	2.460	93.000	148.00	38.300	2.760	3.48	1.77	14.200		
90	x	90	10	10	7	17.000	13.30	80	160	2.570	125.000	199.00	51.700	2.710	3.42	1.74	19.500		
100	x	100	7	10	5	13.620	10.70	64	128	2.710	129.000	205.00	53.200	3.080	3.88	1.98	17.700		
100	x	100	10	10	7	19.000	14.90	89.5	179	2.820	175.000	278.00	72.000	3.040	3.83	1.95	24.400		
120	x	120	8	12	5	18.760	14.70	88	176	3.240	258.000	410.00	106.000	3.710	4.67	2.38	29.500		
120	x	120	11	13	6.5	25.370	19.90	119.5	239	3.300	340.000	541.00	140.000	3.660	4.62	2.35	39.360		
120	x	120	12	13	6.5	27.540	21.60	130	259	3.400	367.000	583.00	151.000	3.650	4.60	2.35	42.680		
130	x	130	9	12	6	22.740	17.90	107.4	215	3.530	366.000	583.00	150.000	4.010	5.06	2.57	38.700		
130	x	130	12	12	8.5	29.760	23.40	140.5	281	3.640	467.000	743.00	192.000	3.960	5.00	2.54	49.900		
150	x	150	12	14	7	34.770	27.30	164	328	4.140	740.000	1,180.00	304.000	4.610	5.82	2.96	68.100		
150	x	150	15	14	10	42.740	33.60	202	403	4.240	888.000	1,410.00	365.000	4.560	5.75	2.92	82.600		
150	x	150	19	14	10	53.380	41.90	251.5	503	4.400	1,090.000	1,730.00	451.000	4.520	5.69	2.91	103.000		
175	x	175	12	15	11	40.520	31.80	191	382	4.730	1,170.000	1,860.00	480.000	5.380	6.78	3.44	91.800		
175	x	175	15	15	11	50.210	39.40	236.5	473	4.850	1,440.000	2,290.00	589.000	5.350	6.75	3.48	114.000		
200	x	200	15	17	12	57.750	45.30	272	544	5.460	2,180.000	3,470.00	891.000	6.140	7.75	3.93	150.000		
200	x	200	20	17	12	76.000	59.70	358	716	5.670	2,820.000	4,490.00	1,160.000	6.090	7.68	3.90	197.000		
200	x	200	25	17	12	93.750	73.60	442	883	5.860	3,420.000	5,420.00	1,410.000	6.040	7.61	3.88	242.000		
250	x	250	25	24	12	119.400	93.70	562	1124	7.100	6,950.000	11,000.00	2,860.000	7.630	9.62	4.89	388.000		
250	x	250	35	24	18	162.600	128.00	768	1536	7.450	9,110.000	14,400.00	3,790.000	7.490	9.42	4.83	519.000		







Unequal Angle

Metric Size



STANDARD SECTIONAL DIMENSIONS						SECTION AREA	UNIT WEIGHT				INFORMATIVE REFERENCE												REMARKS	
											CENTER OF GRAVITY		GEOMETRICAL MOMENT OF INERTIA				RADIUS OF GYRATION OF AREA				tan α	MODULUS OF SECTION		
H	x	B	t	r ₁	r ₂	A	kg/m	kg/6m	kg/12m	C _x	C _y	I _x	I _y	Max I _u	Min I _v	i _x	i _y	Max i _u	Min i _v	Z _x	Z _y			
mm	x	mm	mm	mm	mm	cm ²				cm	cm	cm ⁴	cm ⁴	cm ⁴	cm ⁴	cm	cm	cm	cm	cm ³	cm ³			
90	x	75	9	8.5	6	14.01	11.0	66.0	132	2.75	2.00	109	68.1	143	34.1	2.78	2.20	3.19	1.56	0.676	17.4	12.4		
100	x	75	7	10	5	11.87	9.32	55.9	112	3.06	1.83	118	56.9	144	30.8	3.15	2.19	3.49	1.61	0.548	17.0	10.0		
100	x	75	10	10	7	16.50	13.0	78.0	156	3.17	1.94	159	76.1	194	41.3	3.11	2.15	3.43	1.58	0.543	23.3	13.7		
125	x	75	7	10	5	13.62	10.7	64.2	128	4.10	1.64	219	60.4	243	36.4	4.01	2.11	4.23	1.64	0.362	26.1	10.3		
125	x	75	10	10	7	19.00	14.9	89.4	179	4.22	1.75	299	80.8	330	49.0	3.96	2.06	4.17	1.61	0.357	36.1	14.1		
125	x	75	13	10	7	24.31	19.1	114.6	229	4.35	1.87	376	101	415	61.9	3.93	2.04	4.13	1.60	0.352	46.1	17.9		
125	x	90	10	10	7	20.50	16.1	96.6	193	3.95	2.22	318	138	380	76.2	3.94	2.59	4.30	1.93	0.505	37.2	20.3		
125	x	90	13	10	7	26.26	20.6	123.6	247	4.07	2.34	401	173	477	96.3	3.91	2.57	4.26	1.91	0.501	47.5	25.9		
150	x	90	9	12	6	20.94	16.4	98.4	197	4.95	1.99	485	133	537	80.4	4.81	2.52	5.06	1.96	0.361	48.2	19.0		
150	x	90	12	12	8.5	27.36	21.5	129.0	258	5.07	2.10	619	167	685	102	4.76	2.47	5.00	1.93	0.357	62.3	24.3		
150	x	100	9	12	6	21.84	17.1	102.6	205	4.76	2.30	502	181	579	104	4.79	2.88	5.15	2.18	0.439	49.1	23.5		
150	x	100	12	12	8.5	28.56	22.4	134.4	269	4.88	2.41	642	228	738	132	4.74	2.83	5.09	2.15	0.435	63.4	30.1		
150	x	100	15	12	8.5	35.25	27.7	166.2	332	5.00	2.53	782	276	897	161	4.71	2.80	5.04	2.14	0.431	78.2	37.0		



Dimensional Tolerance

Metric Size | JIS 3192 / TIS 1227-194

DIVISION AND DIMENSION		TOLERANCE	REMARKS	
Leg Length (A or B)	Under 50 in depth	± 1.5		
	50 or over to and excl. 100	± 2.0		
	100 or over to and excl. 200	± 3.0		
	200 or over	± 4.0		
Thickness (t,t ₁ ,t ₂)	For Leg Length A or under 130 in depth	Under 6.3	± 0.6	
		6.3 or over to and excl.10	± 0.7	
		10 or over to and excl.16	± 0.8	
		16 or over	± 1.0	
	For Leg Length A or under 130 or over in depth	Under 6.3	± 0.7	
		6.3 or over to and excl.10	± 0.8	
		10 or over to and excl.16	± 1.0	
		16 or over to and excl.25	± 1.2	
		25 or over	± 1.5	
		Length	7m or under	
Over 7m				
Out of Square (T)	Sections excluding I-section and T-section (for angles)	2.5 % or under of width B		
Bend	Sections excluding I-section and T-section (for angles)	0.30% or under of length	To be applied to bend such as sweep and camber.	

Chemical Composition


According | JIS G 3101

SYMBOL OF GRADE	CHEMICAL COMPOSITION (%)				
	C	Si	Mn	P	S
SS 400, 490	-	-	-	0.050 max	0.050 max
SS 540	0.30 max	-	1.60 max	0.040 max	0.040 max

Note: (1) The value of carbon here in is the actual cast analysis value

Mechanical Properties

Specification	Grade	Product Thickness (mm)	Mechanical Properties				Bend Test	Impact Test (LG)	
			Thickness Range (mm)	Tensile Test (TR)				LG (Average Temp.)	TR (Average Temp.)
				YS min. (N/mm2)	UTS (N/mm2)	E min. (%)			
JIS G 3101 (2011)	SS 400	2 - 35	> 5 ≤ 16	245	400 - 510	17 (200mm)	Bending 180° 1.5 x t	-	-
			> 16 ≤ 35	235	400 - 510	21 (200mm)		-	-
	SS 490	6 - 35	> 5 ≤ 16	285	490 - 610	15 (200mm)	Bending 180° 2 x t	-	-
			> 16 ≤ 35	275	490 - 610	19 (200mm)		-	-
	SS 540	≤ 35	> 5 ≤ 16	400	540 min	13 (200mm)	Bending 180° 2 x t	-	-
			> 16 ≤ 35	390	540 min	17 (200mm)		-	-

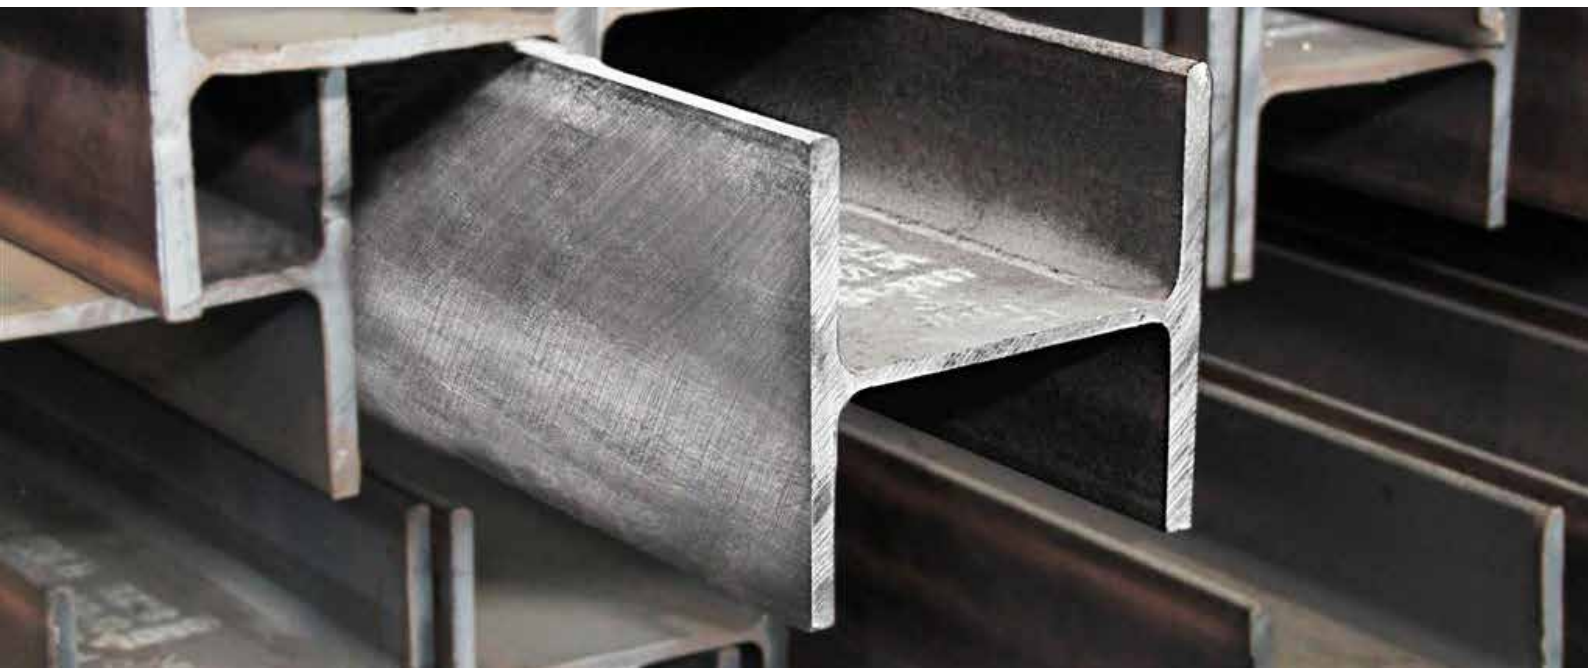

H Beam

GRP hot rolled H-Beam comes with standard size range from 150x150 up to 350x350. Non-standard H-Beam can be fabricated by welding steel plates together to form a welded beam that fits our customer's size requirements.

Standard:

JIS G 3101 SS400
(Mild Steel)
ASTM A36

Web Thickness Range:

6 to 12 mm

Flange Thickness Range:

8 to 19 mm

Standard Length:

1200 cm / 12 m

Annual Capacity:

400.000 MT/Year

Metric Size | JIS 3192

STANDARD SECTIONAL DIMENSIONS				SECTION AREA	UNIT WEIGHT		INFORMATIVE REFERENCE						REMARKS
							GEOMETRICAL MOMENT OF INERTIA		RADIUS OF GYRATION OF AREA		MODULUS OF SECTION		
H x B	t1	t2	r	A			Ix	Iy	ix	iy	Zy	Zy	
mm x mm	mm	mm	mm	cm ²	Kg/m	Kg/12m	cm ⁴	cm ⁴	cm	cm	cm ³	cm ³	
150 x 150	7	10	11	40.14	31.50	378	1 640	563	6.39	3.75	219	75.1	
175 x 175	7.5	11	12	51.21	40.20	482	2 880	984	7.50	4.38	330	112	
200 x 200	8	12	13	63.53	49.90	599	4 720	1 600	8.62	5.02	472	160	
250 x 250	9	14	16	92.18	72.40	869	10 800	3 650	10.8	6.29	867	292	
300 x 300	10	15	18	119.80	94	1128	20 400	6 750	13.1	7.51	1 360	450	
350 x 350	12	19	20	173.9	137	1644	40 300	13 600	15.2	8.84	2 300	776	

NOTE : Non standard sizes are available upon request and subject to minimum quantity



Wide Flange

Another variation of H-Beam under our range product is the Wide Flange. Wide Flange is a structural steel profile similar with H-Beam but with its flange longer than its web. Gunung Raja Paksi hot rolled IWF comes with standard size range from 200x100 up to 600x200. Please see below for standard dimensions.

Standard:
JIS G 3101 SS400
(Mild Steel)
ASTM A36


Web Thickness Range:
4.5 to 12 mm


Flange Thickness Range:
7 to 20 mm

Standard Length:
1200 cm / 12 m


Annual Capacity:
400.000 MT/Year

Metric Size | JIS 3192

STANDARD SECTIONAL DIMENSIONS					SECTION AREA	UNIT WEIGHT		Informative Reference						REMARKS
								GEOMETRICAL MOMENT OF INERTIA		RADIUS OF GYRATION OF AREA		MODULUS OF SECTION		
Nominal Dimensional	H x B	t1	t2	r	Ax			Ix	Iy	ix	iy	Zy	Zy	
mm	mm x mm	mm	mm	m	cm ²	Kg/m	Kg/12m	cm ⁴	cm ⁴	cm	cm	cm ³	cm ³	
200 x 100	198 x 99	4.5	7	11	23.18	18.20	218.4	1,580	114	8.26	2.21	160	23.0	
	200 x 100	5.5	8	11	27.16	21.30	255.6	1,840	134	8.24	2.22	184	26.8	
200 x 150	194 x 150	6	9	12	38.80	30.60	367.2	2,675	507	8.30	3.60	275.8	67.6	
250 x 125	248 x 124	5	8	12	32.68	25.70	308.4	3,540	255	10.4	2.79	285	41.1	
	250 x 125	6	9	12	37.66	29.60	355.2	4,050	294	10.4	2.79	324	47.0	
300 x 150	298 x 149	5.5	8	13	40.80	32.0	384	6,320	442	12.4	3.29	424	59.3	
	300 x 150	6.5	9	13	46.78	36.70	440.47	7,210	508	12.4	3.29	481	67.7	
350 x 175	346 x 174	6	9	14	52.68	41.40	469.8	11,100	792	14.5	3.88	641	91.0	
	350 x 175	7	11	14	63.14	49.60	595.2	13,600	984	14.7	3.95	775	112	
400 x 200	396 x 199	7	11	16	72.16	56.60	679.2	20,000	1,450	16.7	4.48	1,010	145	
	400 x 200	8	13	16	84.1	66.0	792	23,700	1,740	16.8	4.54	1,190	174	
450 x 200	450 x 200	9	14	18	96.8	76.0	912	33,500	1,870	18.6	4.40	1,490	187	
500 x 200	500 x 200	10	16	20	114.2	89.6	1075.2	47,800	2,140	20.5	4.43	1,910	214	
600 x 200	600 x 200	11	17	22	134.4	106	1272	77,600	2,280	24.0	4.12	2,590	228	
588 x 300	588 x 300	12	20	28	192.5	151	1812	181,000	9,020	24.80	6.85	4,020	601	






NOTE: • Non standard sizes are available upon request subject to minimum quantity.



Technical Properties For H-Beam & Wide Flange

Dimensional Tolerance

ITEM, mm (in.)			TOLERANCE	REMARKS
FLANGE WIDTH, B			± 3.0 (0.118)	
Depth (H)	Nominal depths of under 400 (15.748)		± 3.0 (0.118)	
	400 to 600 (23.622), excl.		± 4.0 (0.157)	
	600 and over		± 5.0 (0.197)	
Thickness	Flange, t2	Under 16	± 1.5 (0.059)	
		16 or over to and excl.25	± 2.0 (0.079)	
		25 or over to and excl.40	± 2.5 (0.098)	
	Web, t1	40 or over	± 3.0 (0.118)	
		Under 16	± 1.0 (0.039)	
		16 or over to and excl.25	± 1.5 (0.024)	
25 or over to and excl.40		± 2.0 (0.079)		
40 or over		± 2.5 (0.098)		
Length	7 m or under		+ 40 (1.575) - 0	
	Over 7 m		40 (1.575) plus 5 (0.197) for each additional meter or fraction thereof	
Out-of-square (T)	Nominal depths 300 (11.811) or under in nominal depth		Not more than 1.2 percent of flange width B or 2.0 (0.079) at minimum	
	Nominal depths over 300 (11.811) in nominal depth		Not more than 1.5 percent of flange width B or 2.0 (0.079) at minimum	
Camber of Sweep	Nominal depths 300 (11.811) and under		Not more than 0.20 percent of length	Horizontal or vertical curvature in the direction of length
	Nominal depths over 300 (11.811)		Not more than 0.10 percent of length	
Web Off Center (S)	Nominal depths 300 (11.811) and under		± 3.0 (0.118)	
	Nominal depths over 300 (11.811)		± 4.5 (0.117)	
Ends - out of square (e)			1.6% or under of width B or of depth H, provided that 3.0 mm is the minimum	

Chemical Composition

SYMBOL OF GRADE	CHEMICAL COMPOSITION (%)				
	C	Si	Mn	P	S
SS 400, 490	—	—	—	0.050 max	0.050 max
SS 540	0.3 max	—	1.60 max	0.040 max	0.040 max

Corresponding Specification

TYPE OF MATERIAL	CLASSIFIED BY	TENSILE STRENGTH	SPECIFICATIONS			
	Tensile strength Class (N/mm ²)	Special specification	JIS	ASTM	BS 4360	DIN
Steel Structure	400	—	G 3101 SS 400	A 36	Gr. 43A	ST 33

Mechanical Properties

CLASSIFICATION	YIELD POINT N/mm ²		TENSILE STRENGTH N/mm ²	ELONGATION %		
	Thickness (mm)			Thickness (mm)		
	≤16	> 16		≤5	5 to 16	> 16
Steel Structure	245 min	235 min	400 - 510	21 min	17 min	21 min
JIS G3106 SM 490 YA SM 490 YB	365 min	355 min	490 - 610	19 min	15 min	19 min



Various end products covering all types of hot and cold plates, hot and cold rolled coils, as well as various types of downstream plates and other coils.

Steel Plate

Hot Rolled Coil (HCR)

Coil Plate

The background of the page is a dark, industrial scene with a large red diagonal stripe running from the top left towards the bottom right. In the lower-left corner, there is a close-up of a dark, textured surface, possibly a metal plate or coil, with numerous bright orange sparks or molten droplets falling from it. The text 'Flat Products' is overlaid on the red stripe in a large, bold, white font.

Flat Products



Steel Plate

PT Gunung Raja Paksi (GRP) understands the diverse demand for this form of flat steel as we produce steel plates from Mild Steel, High-Strength Low Alloy, pressure Vessel, Ship Building Plates, and for general purpose uses.

We also understand the various uses and applications of steel plates, and as one of the leading steel mill, we can produce the majority of plate grades and standards as issued by the world's major third party certification entities such as BV, ABS, BKI, DNV, LR, GL, TUV, NK & CE Marked and each with their different sub grades.

To further enhance the performance of our steel product, we have a heat treatment facility for normalizing. This process is to accommodate with a minimum thickness of 6 mm steel plate and will provide the additional performance enhancement to our high tensile plate range. Combining our broad experience in steel industry and extensive range of cutting machines, we are able to fulfill various dimensions and grades required by our customers.



Annual Capacity: 480,000 MT/year
Thickness: 6 - 150 mm, Width: 1200 - 3050 mm Max
Grade: ASTM, JIS, EN, DIN, AS/NZS, BS, API 5L PSL 1; PSL 2, API 2H, API 2W, BKI, ABS, LR, BV

World class steel plates are manufactured at Gunung Raja Paksi Plate Mill with state-of-the-art technology to ensure their quality. These plates come in various standards, grades, and sizes to meet your requirement for direct use, rolling, or fabricating. Ranging from mild steel to high strength steel, our products are subjected to stringent quality control protocols.

Application	Standard & Specification	Grade
General Structural and Weldable Structural Steel	ASTM	A36, A283, A131, A529, A572, A573, A633, A709,
	JIS	SS400, SS490, SS540, SM400, SM490, SM520, SM570
	EN	S235JR/J0/J2, S275JR/J0/J2/N/NL, S355JR/J0/J2/K2/N/NL/M/ML, S420M/ML, S460M/ML
	DIN	ST 37.2, ST 44.2, ST 52.3
	AS/NZS	200, 250, 300, 350, 400, 450
Pressure Vessel Steel	BS	40, 43, 50, 55
	ASTM	A285, A516
Line pipe Steel	EN	P235GH, P265GH, P275NH/NL1, P295GH, P355GH/N/NH/NL1/M/ML1
	API 5L PSL 1; PSL 2	A, B, X42, X46, X52, X56, X60, X65, X70
Offshore Structural Steel	API 2H	42, 50
	API 2W	50, 60
	ASTM	A588
Weather Resistant Steel	JIS	SMA 400, SMA 490,
	EN	S235 J0W/J2W, S355 J0W/J2W/K2W
High Carbon Steel	AS/NZS	WR 250
	ASTM	1042 - 1050
	JIS	S 45 - S 50
	AS/NZS	K1042
	EN	C 45
Ship Building Quality	BKJ, ABS, LR, DNVGL, BV, NK	A, B, D, E, AH/DH/EH 32/36/40
Gas Cylinders Steel	JIS	SG 255, SG 295
Forming and Drawing Steel	ASTM	A1006, A1008, A1011CS/DS,
	JIS	SAPH 400/440, SPHC, SPHD, SPHT-1/2/3

Calculated Plate Weight (From Thickness & Size)

Width x Length (in mm)	1219 X 2438	1219 X 6096	1524 X 3048	1524 X 6096	1524 X 9144	1524 X 12192	1829 X 6096	1829 X 12192	2133 X 6096	2133 X 12192	2438 X 6096	2438 X 12192	2743 X 6096	2743 X 12192	3048 X 6096	3048 X 12192
Width x Length (in ft)	4' x 8'	4' x 20'	5' x 10'	5' x 20'	5' x 30'	5' x 40'	6' x 20'	6' x 40'	7' x 20'	7' x 40'	8' x 20'	8' x 40'	9' x 20'	9' x 40'	10' x 20'	10' x 40'
Width x Length (in inch)	48 x 96	48 x 240	60 x 120	60 x 240	60 x 360	60 x 480	72 x 240	72 x 480	84 x 240	84 x 480	96 x 240	96 x 480	108 x 240	108 x 480	120 x 240	120 x 480
Thickness (mm)																
8	187	467	292	583	875	1.167	700	1.400	817	1.633	933	1.867	1.050	2.100	1.167	2.334
9	210	525	328	656	985	1.313	788	1.575	919	1.837	1.050	2.100	1.181	2.363	1.313	2.625
10	233	583	365	729	1.094	1.459	875	1.750	1.021	2.041	1.167	2.333	1.313	2.625	1.459	2.917
12	280	700	438	875	1.313	1.750	1.050	2.101	1.225	2.450	1.400	2.800	1.575	3.150	1.750	3.501
12.7	296	741	463	926	1.389	1.852	1.112	2.223	1.296	2.593	1.482	2.963	1.667	3.334	1.852	3.705
14	327	817	511	1.021	1.532	2.042	1.225	2.451	1.429	2.858	1.633	3.267	1.838	3.675	2.042	4.084
15	350	875	547	1.094	1.641	2.188	1.313	2.626	1.531	3.062	1.750	3.500	1.969	3.938	2.188	4.376
16	373	933	583	1.167	1.750	2.334	1.400	2.801	1.633	3.266	1.867	3.733	2.100	4.200	2.334	4.667
18	420	1.050	656	1.313	1.969	2.625	1.575	3.151	1.837	3.675	2.100	4.200	2.363	4.725	2.625	5.251
19	443	1.108	693	1.386	2.078	2.771	1.663	3.326	1.939	3.879	2.217	4.433	2.494	4.988	2.771	5.543
20	467	1.167	729	1.459	2.188	2.917	1.750	3.501	2.041	4.083	2.333	4.667	2.625	5.250	2.917	5.834
22	513	1.283	802	1.604	2.407	3.209	1.926	3.851	2.246	4.491	2.567	5.133	2.888	5.776	3.209	6.418
24	560	1.400	875	1.750	2.625	3.501	2.101	4.201	2.450	4.899	2.800	5.600	3.150	6.301	3.501	7.001
25	583	1.458	912	1.823	2.735	3.646	2.188	4.376	2.552	5.104	2.917	5.833	3.282	6.563	3.646	7.293
25.4	593	1.482	926	1.852	2.779	3.705	2.223	4.446	2.593	5.185	2.963	5.927	3.334	6.668	3.705	7.410
26	607	1.517	948	1.896	2.844	3.792	2.276	4.551	2.654	5.308	3.033	6.067	3.413	6.826	3.792	7.585
28	653	1.633	1.021	2.042	3.063	4.084	2.451	4.901	2.858	5.716	3.267	6.533	3.675	7.351	4.084	8.168
30	700	1.750	1.094	2.188	3.282	4.376	2.626	4.251	3.062	6.124	3.500	7.000	3.938	7.876	4.376	8.751
32	747	1.867	1.167	2.334	3.501	4.667	2.801	5.602	3.266	6.533	3.733	7.467	4.200	8.401	4.667	9.335
36	840	2.100	1.313	2.625	3.938	5.251	3.151	6.302	3.675	7.349	4.200	8.400	4.725	9.451	5.251	10.502
38	887	2.217	1.386	2.771	4.157	5.543	3.326	6.652	3.879	7.757	4.433	8.867	4.988	4.976	5.543	11.085
40	933	2.333	1.459	2.917	4.376	5.834	3.501	7.002	4.083	8.166	4.667	9.333	5.250	10.501	5.834	11.669
45	1.050	2.625	1.641	3.282	4.923	6.564	3.939	7.877	4.593	9.186	5.250	10.500	5.907	11.814	6.564	13.127
50	1.166	2.917	1.823	3.646	5.470	7.293	4.376	8.752	5.104	10.207	5.833	11.667	6.563	13.126	7.293	14.586
55	1.283	3.208	2.006	4.011	6.017	8.022	4.814	9.628	5.614	11.228	6.417	12.833	7.219	14.439	8.022	16.044
60	1.400	3.500	2.188	4.376	6.564	8.751	5.251	10.503	6.124	12.249	7.000	14.000	7.876	15.751	8.751	17.503
65	1.516	3.792	2.370	4.740	7.111	9.481	5.689	11.378	6.635	13.269	7.583	15.167	8.532	17.064	9.481	18.962
70	1.633	4.083	2.553	5.105	7.658	10.210	6.127	12.253	7.145	14.290	8.167	16.333	9.188	18.377	10.210	20.420
75	1.750	4.375	2.735	5.470	8.204	10.939	6.564	13.129	7.655	15.311	8.750	17.500	9.845	19.689	10.939	21.879
80	1.866	4.667	2.917	5.834	8.751	11.669	7.002	14.004	8.166	16.331	9.333	18.667	10.501	21.002	11.669	23.337
85	1.983	4.958	3.099	6.199	9.298	12.398	7.440	14.879	8.676	17.352	9.917	19.833	11.157	22.315	12.398	24.796
90	2.100	5.250	3.282	6.564	9.845	13.127	7.877	15.754	9.186	18.373	10.500	21.500	11.814	23.627	13.127	26.254
95	2.216	5.542	3.464	6.928	10.392	13.856	8.315	16.630	9.697	19.394	11.083	22.167	12.470	24.940	13.856	27.713
100	2.333	5.833	3.646	7.293	10.939	14.586	8.752	17.505	10.207	20.414	11.667	23.333	13.126	26.252	14.586	29.172

Conculated considering specific gravity of steel as 7.85 Kg/mm2, and dimension in mm. Not Available Size

General & Weldable Structural Steel - Mild Steel

Specification	Grade	Prod. Thick (mm)	Thick. Range (mm)	Mechanical Properties														General Purpose		
				Tensile Test							Impact Test									
				TR							LG				TR					
				YS (N/mm ²)	TS (N/mm ²)		EL (%)			5.65V ₅₀	+20	0	-20	-40	+20	0	-20		-40	
Min	Min	Max	200	80	50	5.65V ₅₀	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG				
ASTM A-36 / ASME A-36	-	2-150	≤ 20	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	-	Specification for Carbon Structural Steel	
			> 20 ≤ 40	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	-		
			> 40 ≤ 65	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	-		
			> 65 ≤ 100	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	-		
			> 100	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	-		
ASTM A-283 / ASME A-283	A	2-100	≤ 40	165	310	415	27 ^I	-	30 ^I	-	-	-	-	-	-	-	-	Low and Intermediate Tensile Strength Carbon Steel Plates		
			> 40	165	310	415	27 ^I	-	30 ^I	-	-	-	-	-	-	-	-			
	B	6-50	≤ 40	185	345	450	25 ^I	-	28 ^I	-	-	-	-	-	-	-	-			
			> 40	185	345	450	25 ^I	-	28 ^I	-	-	-	-	-	-	-	-			
	C	6-50	≤ 40	205	380	515	22 ^I	-	25 ^I	-	-	-	-	-	-	-	-			
			> 40	205	380	515	22 ^I	-	25 ^I	-	-	-	-	-	-	-	-			
	D	6-50	≤ 40	230	415	550	20 ^I	-	23 ^I	-	-	-	-	-	-	-	-			
			> 40	230	415	550	20 ^I	-	23 ^I	-	-	-	-	-	-	-	-			
	ASTM A-131	A	5-80	≤ 25	235	400	520	21	-	24	-	-	-	-	-	-	-		-	Structural Steel for Ships
				> 25 ≤ 35	235	400	520	21	-	24	-	-	-	-	-	-	-		-	
> 35 ≤ 50				235	400	520	21	-	24	-	34	-	-	-	-	24	-	-		
> 50 ≤ 70				235	400	520	21	-	24	-	41	-	-	-	-	27	-	-		
B		5-80	≤ 25	235	400	520	21	-	24	-	-	-	-	-	-	-	-	Structural Steel for Ships		
			> 25 ≤ 35	235	400	520	21	-	24	-	-	27	-	-	-	-	20		-	
			> 35 ≤ 50	235	400	520	21	-	24	-	-	27	-	-	-	-	20		-	
			> 50 ≤ 70	235	400	520	21	-	24	-	-	34	-	-	-	-	24		-	
D		5-80	> 70 ≤ 100	235	400	520	21	-	24	-	-	41	-	-	-	-	27	-	Structural Steel for Ships	
			≤ 25	235	400	520	21	-	24	-	-	-	-	-	-	-	-	-		
			> 25 ≤ 35	235	400	520	21	-	24	-	-	27	-	-	-	-	-	20		
			> 35 ≤ 50	235	400	520	21	-	24	-	-	27	-	-	-	-	-	20		
E		8-80	> 50 ≤ 70	235	400	520	21	-	24	-	-	-	34	-	-	-	-	-	Structural Steel for Ships	
			> 70 ≤ 100	235	400	520	21	-	24	-	-	-	41	-	-	-	-	27		
			≤ 25	235	400	520	21	-	24	-	-	-	-	-	-	-	-	-		
			> 25 ≤ 35	235	400	520	21	-	24	-	-	-	27	-	-	-	-	-		
ASTM A-573 / ASME SA-573	58	6-40	≤ 13	220	400	490	21 ^P	-	24 ^P	-	-	-	-	-	-	-	-	Structural Carbon Steel Plates with Improved Toughness		
			> 13 ≤ 40	220	400	490	21 ^P	-	24 ^P	-	-	-	-	-	-	-	-			
ASTM A-709 / ASME SA 709	36	2-150	≤ 20	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	Structural Steels for Bridges		
			> 20 ≤ 40	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-			
			> 40 ≤ 65	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-			
			> 65 ≤ 100	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-			
			> 100	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-			
JISG 3101	SS - 400	2-150	≤ 5	245.00	400	510	-	-	21	-	-	-	-	-	-	-	-	Hot Rolled Steel for General Structure		
			> 5 ≤ 16	245	400	510	17	-	-	-	-	-	-	-	-	-	-			
			> 16 ≤ 40	235	400	510	21	-	-	-	-	-	-	-	-	-	-			
			> 40 ≤ 100	215 ^A	400	510	-	-	23 ^B	-	-	-	-	-	-	-	-			
			> 100	205	400	510	-	-	23 ^B	-	-	-	-	-	-	-	-			
JIS G 3101	SM 400 A	2-150	≤ 5	245.00	400	510	-	-	23	-	-	-	-	-	-	-	-	Hot Rolled Steel for Welded Structure		
			> 5 ≤ 16	245.00	400	510	18	-	-	-	-	-	-	-	-	-	-			
			> 16 ≤ 40	235.00	400	510	22	-	-	-	-	-	-	-	-	-	-			
			> 40 ≤ 75	215.00	400	510	-	-	24	-	-	-	-	-	-	-	-			
			> 75 ≤ 100	215.00	400	510	-	-	24	-	-	-	-	-	-	-	-			
			> 100 ≤ 160	205.00	400	510	-	-	24 ^D	-	-	-	-	-	-	-	-			
			> 160 ≤ 200	195.00	400	510	-	-	24 ^D	-	-	-	-	-	-	-	-			
			≤ 5	245	400	510	-	-	23	-	-	-	-	-	-	-	-			
	SM 400 B	2-150	> 5 ≤ 16	245	400	510	18	-	-	-	-	27 ^F	-	-	-	-	-	-		
			> 16 ≤ 40	235	400	510	22	-	-	-	-	27	-	-	-	-	-	-		
			> 40 ≤ 75	215	400	510	-	-	24	-	-	27	-	-	-	-	-	-		
			> 75 ≤ 100	215	400	510	-	-	24	-	-	27	-	-	-	-	-	-		
			> 100 ≤ 160	205	400	510	-	-	24 ^D	-	-	27	-	-	-	-	-	-		
			> 160 ≤ 200	195	400	510	-	-	24 ^D	-	-	27	-	-	-	-	-	-		
			≤ 5	245	400	510	-	-	23	-	-	-	-	-	-	-	-	-		
			> 5 ≤ 16	245	400	510	18	-	-	-	-	47 ^F	-	-	-	-	-	-		
SM 400 C	2-150	> 16 ≤ 40	235	400	510	22	-	-	-	-	47	-	-	-	-	-	-			
		> 40 ≤ 75	215	400	510	-	-	24	-	-	47	-	-	-	-	-	-			
		> 75 ≤ 100	215	400	510	-	-	24	-	-	47	-	-	-	-	-	-			
		> 100 ≤ 160	-	400	510	-	-	24 ^D	-	-	47	-	-	-	-	-	-			
		> 160 ≤ 200	-	400	510	-	-	24 ^D	-	-	47	-	-	-	-	-	-			
		≤ 3	235	360	510	-	19	-	-	-	27	-	-	-	-	-	-			
		> 3 ≤ 16	235	360	510	-	-	24	-	-	27	-	-	-	-	-	-			
		> 16 ≤ 40	225	360	510	-	-	24	-	-	27	-	-	-	-	-	-			
EN 10025-2:2004	S 235 JR + AR	2-150	> 40 ≤ 63	215	360	510	-	-	23	-	27	-	-	-	-	-	-	Structural Steel		
			> 63 ≤ 80	215	360	510	-	-	22	-	27	-	-	-	-	-	-			
			> 80 ≤ 100	215	360	510	-	-	22	-	27	-	-	-	-	-	-			
			> 100 ≤ 150	195	350	500	-	-	22	-	27	-	-	-	-	-	-			
			> 150 ≤ 200	185	340	490	-	-	21	-	27	-	-	-	-	-	-			
			> 200 ≤ 250	175	340	490	-	-	21	-	27	-	-	-	-	-	-			
			≤ 3	235	360	510	-	19	-	-	-	27	-	-	-	-	-			
			> 3 ≤ 16	235	360	510	-	-	24	-	-	27	-	-	-	-	-			
	S 235 J2 + N	2-150	> 16 ≤ 40	225	360	510	-	-	24	-	-	27	-	-	-	-	-			
			> 40 ≤ 63	215	360	510	-	-	23	-	-	27	-	-	-	-	-			
			> 63 ≤ 80	215	360	510	-	-	22	-	27	-	-	-	-	-	-			
			> 80 ≤ 100	215	360	510	-	-	22	-	27	-	-	-	-	-	-			
			> 100 ≤ 150	195	350	500	-	-	22	-	27	-	-	-	-	-	-			
			> 150 ≤ 200	185	340	490	-	-	21	-	27	-	-	-	-	-	-			
			> 200 ≤ 250	175	340	490	-	-	21	-	27	-	-	-	-	-	-			
			> 250 ≤ 300	175	340	490	-	-	21	-	27	-	-	-	-	-	-			

General & Weldable Structural Steel - Mild Steel

Specification	Grade	Prod. Thick (mm)	Thick. Range (mm)	Mechanical Properties														General Purpose	
				Tensile Test							Impact Test								
				TR				LG			TR								
				YS (N/mm ²)	TS (N/mm ²)			El (%)		+20	0	-20	-40	+20	0	-20	-40		
Min	Min	Max	200	80	50	5.65V50	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG				
EN 10025-3:2004	S 275 N	6 - 100	< 3	275	370	510	-	-	-	24	55	47	40	-	31	27	20	-	Weldable Fine Grain Structural Steel
			≥ 3 ≤ 16	275	370	510	-	-	-	24	55	47	40	-	31	27	20	-	
			> 16 ≤ 40	265	370	510	-	-	-	24	55	47	40	-	31	27	20	-	
			> 40 ≤ 63	255	370	510	-	-	-	24	55	47	40	-	31	27	20	-	
			> 63 ≤ 80	245	370	510	-	-	-	23	55	47	40	-	31	27	20	-	
			> 80 ≤ 100	235	370	510	-	-	-	23	55	47	40	-	31	27	20	-	
	S 275 NL	6 - 100	< 3	275	370	510	-	-	-	24	63	55	47	31	40	34	27	20	
			≥ 3 ≤ 16	275	370	510	-	-	-	24	63	55	47	31	40	34	27	20	
			> 16 ≤ 40	265	370	510	-	-	-	24	63	55	47	31	40	34	27	20	
			> 40 ≤ 63	255	370	510	-	-	-	24	63	55	47	31	40	34	27	20	
			> 63 ≤ 80	245	370	510	-	-	-	23	63	55	47	31	40	34	27	20	
			> 80 ≤ 100	235	370	510	-	-	-	23	63	55	47	31	40	34	27	20	
DIN 17100 (1980)	ST 37.2	6 - 80	≤ 16	235	340	470	24	-	-	-	27	-	-	-	-	-	-	Steel for General Structural Purpose	
			> 16 ≤ 25	225	340	470	24	-	-	-	-	-	-	-	-	-	-		
			> 25 < 40	225	340	470	24	-	-	-	-	-	-	-	-	-	-		
			> 40 ≤ 63	215	340	470	23	-	-	-	-	-	-	-	-	-	-		
			> 63 ≤ 80	205	340	470	22	-	-	-	-	-	-	-	-	-	-		
			> 80 ≤ 100	195	340	470	22	-	-	-	-	-	-	-	-	-	-		
	ST 44.2	6 - 80	≤ 16	275	410	540	20	-	-	-	27	-	-	-	-	-	-		
			> 16 < 25	265	410	540	20	-	-	-	27	-	-	-	-	-	-		
			> 25 < 40	265	410	540	20	-	-	-	27	-	-	-	-	-	-		
			> 40 < 63	255	410	540	19	-	-	-	27	-	-	-	-	-	-		
			> 63 < 80	245	410	540	18	-	-	-	-	-	-	-	-	-	-		
			> 80 < 100	235	410	540	18	-	-	-	-	-	-	-	-	-	-		
AS/NZS 3678 ACRS Certificate No. 171202	200	5-100	≥ 5 ≤ 8	200	300	-	-	-	-	24 ^A	-	-	-	-	-	-	-	Structural Steel Hot Rolled Plates, Floorplates and Slabs	
			> 8 ≤ 12	200	300	-	-	-	-	24 ^B	-	-	-	-	-	-	-		
			> 12 ≤ 20	-	300	-	-	-	-	24 ^A	-	-	-	-	-	-	-		
			> 20 ≤ 32	-	300	-	-	-	-	24 ^B	-	-	-	-	-	-	-		
			> 32 ≤ 50	-	300	-	-	-	-	24 ^B	-	-	-	-	-	-	-		
			> 50 ≤ 80	-	300	-	-	-	-	24 ^B	-	-	-	-	-	-	-		
	250	5-100	> 80 ≤ 100	-	300	-	-	-	-	24 ^B	-	-	-	-	-	-	-		
			≥ 5 ≤ 8	280	410 _{min}	-	-	-	-	22(5.65V50)	-	-	-	-	-	-	-		
			> 8 ≤ 12	260	410 _{min}	-	-	-	-	22(5.65V50)	-	-	-	-	-	-	-		
			> 12 ≤ 20	250	410 _{min}	-	-	-	-	22(5.65V50)	-	-	-	-	-	-	-		
			> 20 ≤ 32	250	410 _{min}	-	-	-	-	22(5.65V50)	-	-	-	-	-	-	-		
			> 32 ≤ 50	250	410 _{min}	-	-	-	-	22(5.65V50)	-	-	-	-	-	-	-		
	300	8-100	> 50 ≤ 80	240	410 _{min}	-	-	-	-	22(5.65V50)	-	-	-	-	-	-	-		
			> 80 ≤ 100	230	410 _{min}	-	-	-	-	22(5.65V50)	-	-	-	-	-	-	-		
			8	320	430 _{min}	-	-	-	-	21(5.65V50)	-	-	-	-	-	-	-		
			> 8 ≤ 12	310	430 _{min}	-	-	-	-	21(5.65V50)	-	-	-	-	-	-	-		
			> 12 ≤ 20	300	430 _{min}	-	-	-	-	21(5.65V50)	-	-	-	-	-	-	-		
			> 20 ≤ 32	280	430 _{min}	-	-	-	-	21(5.65V50)	-	-	-	-	-	-	-		
BS 4360	40 A	5 - 80	≤ 16	235	340	500	22 ^A	25 ^B	-	25	-	-	-	-	-	-	-	Weldable Structural Steels	
			> 16 ≤ 40	225	340	500	22	25	-	25	-	-	-	-	-	-	-		
			> 40 ≤ 63	215	340	500	22	25	-	25	-	-	-	-	-	-	-		
			> 63 ≤ 100	205	340	500	22	25	-	25	-	-	-	-	-	-	-		
			> 100 ≤ 150	185	340	500	22	25	-	25	-	-	-	-	-	-	-		
			≤ 16	235	340	500	22 ^A	25 ^B	-	25	27	-	-	-	-	-	-		
	40 B	5 - 80	> 16 ≤ 40	225	340	500	22	25	-	25	27	-	-	-	-	-	-		
			> 40 ≤ 63	215	340	500	22	25	-	25	27	-	-	-	-	-	-		
			> 63 ≤ 100	205	340	500	22	25	-	25	27	-	-	-	-	-	-		
			> 100 ≤ 150	185	340	500	22	25	-	25	27	-	-	-	-	-	-		
			≤ 16	235	340	500	22 ^A	25 ^B	-	25	-	-	27	-	-	-	-		
			> 16 ≤ 40	225 ^B	340	500	22	25	-	25	-	-	27	-	-	-	-		
40 C	5 - 80	> 40 ≤ 63	215	340	500	22	25	-	25	-	-	27	-	-	-	-			
		> 63 ≤ 100	210	340	500	22	25	-	25	-	-	27	-	-	-	-			
		> 100 ≤ 150	185	340	500	22	25	-	25	-	-	27	-	-	-	-			
		≤ 16	235	340	500	22 ^A	25 ^B	-	25	-	-	27	-	-	-	-			
		> 16 ≤ 40	225	340	500	22	25	-	25	-	-	27	-	-	-	-			
		> 40 ≤ 63	215	340	500	22	25	-	25	-	-	27	-	-	-	-			
40 D	8 - 80	> 63 ≤ 100	215	340	500	22	25	-	25	-	-	27	-	-	-	-			
		> 100 ≤ 150	205	340	500	22	25	-	25	-	-	27	-	-	-	-			
		≤ 16	275	430	580	20 ^A	23 ^B	-	22	-	-	-	-	-	-	-			
		> 16 ≤ 40	265	430	580	20	23	-	22	-	-	-	-	-	-	-			
		> 40 ≤ 63	255	430	580	20	23	-	22	-	-	-	-	-	-	-			
		> 63 ≤ 100	245	430	580	20	23	-	22	-	-	-	-	-	-	-			
BS 4360	43 A	5 - 80	> 100 ≤ 150	225	410	580	20	23	-	22	-	-	-	-	-	-	Weldable Structural Steels		
			≤ 16	275	430	580	20 ^A	23 ^B	-	22	27	-	-	-	-	-			
			> 16 ≤ 40	265	430	580	20	23	-	22	27	-	-	-	-	-			
			> 40 ≤ 63	255	430	580	20	23	-	22	27	-	-	-	-	-			
			> 63 ≤ 100	245	430	580	20	23	-	22	27	-	-	-	-	-			
			> 100 ≤ 150	225	410	580	20	23	-	22	27	-	-	-	-	-			
	43 B	5 - 80	≤ 16	275	430	580	20 ^A	23 ^B	-	22	-	-	-	-	-	-	Weldable Structural Steels		
			> 16 ≤ 40	265	430	580	20	23	-	22	27	-	-	-	-	-			
			> 40 ≤ 63	255	430	580	20	23	-	22	27	-	-	-	-	-			
			> 63 ≤ 100	245	430	580	20	23	-	22	27	-	-	-	-	-			
			> 100 ≤ 150	225	410	580	20	23	-	22	27	-	-	-	-	-			
			> 150 ≤ 200	205	410	580	20	23	-	22	27	-	-	-	-	-			
43 C	5 - 80	≤ 16	275	430	580	20 ^A	23 ^B	-	22	-	-	-	-	-	-	Weldable Structural Steels			
		> 16 ≤ 40	265	430	580	20	23	-	22	-	-	-	-	-	-				
		> 40 ≤ 63	255	430	580	20	23	-	22	-	-	-	-	-	-				
		> 63 ≤ 100	245	430	580	20	23	-	22	-	-	-	-	-	-				
		> 100 ≤ 150	225	410	580	20	23	-	22	-	-	-	-	-	-				
		> 150 ≤ 200	205	410	580	20	23	-	22	-	-	-	-	-	-				
43 D	8 - 80	≤ 16	275	430	580	20 ^A	23 ^B	-	22	-	-	27	-	-	-	-	Weldable Structural Steels		
		> 16 ≤ 40	265	430	580	20	23	-	22	-	-	27	-	-	-	-			
		> 40 ≤ 63	255	430	580	20	23	-	22	-	-	27	-	-	-	-			
		> 63 ≤ 100	245	430	580	20	23	-	22	-	-	27	-	-	-	-			
> 100 ≤ 150	225	410	580	20	23	-	22	-	-	27	-	-	-	-	-				

General & Weldable Structural Steel - High Strength Steel (Yield Strength $\pm$ 320 - 400 Mpa)

Specification	Grade	Prod. Thick (mm)	Thick. Range (mm)	Mechanical Properties														General Purpose		
				Tensile Test								Impact Test								
				TR								LG				TR				
				YS (N/mm ²) Min	TS (N/mm ²) Min Max		200		80		50	5.65Ys0	AVG	0 AVG	-20 AVG	-40 AVG	AVG		0 AVG	-20 AVG
ASTM A 131	AH32	6 - 80	> 6.4 ≤ 12.5	315	440	590	19	-	22	-	-	31	-	-	-	22	-	-		
			> 12.5 ≤ 20	315	440	590	19	-	22	-	-	31	-	-	-	22	-	-		
			> 20 ≤ 25	315	440	590	19	-	22	-	-	31	-	-	-	22	-	-		
			> 25 ≤ 35	315	440	590	19	-	22	-	-	31	-	-	-	22	-	-		
			> 35 ≤ 50	315	440	590	19	-	22	-	-	31	-	-	-	22	-	-		
			> 50 ≤ 70	315	440	590	19	-	22	-	-	28	-	-	-	26	-	-		
	DH32	6 - 80	> 70 ≤ 100	315	440	590	19	-	22	-	-	46	-	-	-	31	-	-		
			> 6.4 ≤ 12.5	315	440	590	19	-	22	-	-	-	31	-	-	-	22	-		
			> 12.5 ≤ 20	315	440	590	19	-	22	-	-	-	31	-	-	-	22	-		
			> 20 ≤ 25	315	440	590	19	-	22	-	-	-	31	-	-	-	22	-		
			> 25 ≤ 35	315	440	590	19	-	22	-	-	-	31	-	-	-	22	-		
			> 35 ≤ 50	315	440	590	19	-	22	-	-	-	31	-	-	-	22	-		
	EH32	8 - 60	> 50 ≤ 70	315	440	590	19	-	22	-	-	-	28	-	-	-	26	-		
			> 70 ≤ 100	315	440	590	19	-	22	-	-	-	46	-	-	-	31	-		
			> 6.4 ≤ 12.5	315	440	590	19	-	22	-	-	-	-	31	-	-	-	22		
			> 12.5 ≤ 20	315	440	590	19	-	22	-	-	-	-	31	-	-	-	22		
			> 20 ≤ 25	315	440	590	19	-	22	-	-	-	-	31	-	-	-	22		
			> 25 ≤ 35	315	440	590	19	-	22	-	-	-	-	31	-	-	-	22		
	AH36	6 - 80	> 35 ≤ 50	315	440	590	19	-	22	-	-	-	31	-	-	-	22	-		
			> 50 ≤ 70	315	440	590	19	-	22	-	-	-	28	-	-	-	26	-		
			> 70 ≤ 100	315	440	590	19	-	22	-	-	-	46	-	-	-	31	-		
			> 6.4 ≤ 12.5	355	490	620	19	-	22	-	-	-	34	-	-	-	24	-		
			> 12.5 ≤ 20	355	490	620	19	-	22	-	-	-	34	-	-	-	24	-		
			> 20 ≤ 25	355	490	620	19	-	22	-	-	-	34	-	-	-	24	-		
DH36	6 - 80	> 25 ≤ 35	355	490	620	19	-	22	-	-	34	-	-	-	24	-	-			
		> 35 ≤ 50	355	490	620	19	-	22	-	-	34	-	-	-	24	-	-			
		> 50 ≤ 70	355	490	620	19	-	22	-	-	41	-	-	-	27	-	-			
		> 70 ≤ 100	355	490	620	19	-	22	-	-	50	-	-	-	34	-	-			
		> 6.4 ≤ 12.5	355	490	620	19	-	22	-	-	-	34	-	-	-	24	-			
		> 12.5 ≤ 20	355	490	620	19	-	22	-	-	-	34	-	-	-	24	-			
EH36	8 - 60	> 20 ≤ 25	355	490	620	19	-	22	-	-	-	34	-	-	-	24	-			
		> 25 ≤ 35	355	490	620	19	-	22	-	-	-	34	-	-	-	24	-			
		> 35 ≤ 50	355	490	620	19	-	22	-	-	-	34	-	-	-	24	-			
		> 50 ≤ 70	355	490	620	19	-	22	-	-	-	41	-	-	-	24	-			
		> 70 ≤ 100	355	490	620	19	-	22	-	-	-	50	-	-	-	34	-			
		> 6.4 ≤ 12.5	355	490	620	19	-	22	-	-	-	-	34	-	-	-	24	-		
ASTM A 529	50	8 - 25	≤25	345	450	690	18	-	21	-	-	-	-	-	-	-	-	High-Strength Carbon-Manganese Steel of Structural Quality		
	55	8 - 25	≤25	380	485	690	17	-	20	-	-	-	-	-	-	-	-			
ASTM A 572 / ASME SA 572	42	6 - 120	≤40	290	415	-	20 ⁱ	-	24 ⁱ	-	-	-	-	-	-	-	-	High Strength Low Alloy Columbium-Vanadium Structural Steel		
	50	8 - 120	>40	290	415	-	20 ⁱ	-	24 ⁱ	-	-	-	-	-	-	-	-			
			≤40	345	450	-	18 ⁱ	-	21 ⁱ	-	-	-	-	-	-	-	-			
			>40	345	450	-	18 ⁱ	-	21 ⁱ	-	-	-	-	-	-	-	-			
55	8 - 120	≤40	380	485	-	17 ⁱ	-	20 ⁱ	-	-	-	-	-	-	-	-	-			
		>40	380	485	-	17 ⁱ	-	20 ⁱ	-	-	-	-	-	-	-	-	-			
ASTM A 573	65	6 - 40	≤13	240	450	530	20 ^g	-	23 ^g	-	-	-	-	-	-	-	-	STRUCTURAL CARBON STEEL PLATES WITH IMPROVED TOUGHNESS		
	70	6 - 40	>13 ≤40	240	450	530	20 ^g	-	23 ^g	-	-	-	-	-	-	-	-			
			≤13	290	485	620	18 ^g	-	21 ^g	-	-	-	-	-	-	-	-			
			>13 ≤40	290	485	620	18 ^g	-	21 ^g	-	-	-	-	-	-	-	-		-	
ASTM A 709	50	8 - 50	≤40	345	450	-	18 ⁵	-	21 ⁵	-	-	-	-	-	-	-	-	STRUCTURAL STEEL FOR BRIDGES		
			>40	345	450	-	18 ⁵	-	21 ⁵	-	-	-	-	-	-	-	-			
JIS G 3101	SS - 490	6-120	≤5	285	490	610	-	-	19	-	-	-	-	-	-	-	-	-	HOT ROLLED STEEL FOR GENERAL STRUCTURE	
			>5 <16	285	490	610	15	-	-	-	-	-	-	-	-	-	-	-		
			>16 <40	275	490	610	19	-	-	-	-	-	-	-	-	-	-	-		-
			>40 ≤100	255	490	610	-	-	21 ⁸	-	-	-	-	-	-	-	-	-		-
			>100	245	490	610	-	-	21 ⁸	-	-	-	-	-	-	-	-	-		
JIS G 3106	SM 490 YA	5-120	≤5	365	490	610	-	-	19	-	-	-	-	-	-	-	-	-	HOT ROLLED STEEL FOR WELDED STRUCTURE	
			>5 ≤16	365	490	610	15	-	-	-	-	-	-	-	-	-	-	-		
			>16 ≤40	355	490	610	19	-	-	-	-	-	-	-	-	-	-	-		-
			>40 ≤75	335	490	610	-	-	21	-	-	-	-	-	-	-	-	-		-
JIS G 3106	SM 490 YB	5-120	>75 ≤100	325	490	610	-	-	21	-	-	-	-	-	-	-	-	-		
			≤5	365	490	610	-	-	19	-	-	-	-	-	-	-	-	-		
			>5 ≤16	365	490	610	15	-	-	-	-	27 ^f	-	-	-	-	-	-	-	
			>16 ≤40	355	490	610	19	-	-	-	-	27	-	-	-	-	-	-	-	
JIS G 3106	SM 520 B	8-120	>40 ≤75	335	490	610	-	-	21	-	-	-	-	-	-	-	-	-		
			>75 ≤100	325	490	610	-	-	21	-	-	-	27	-	-	-	-	-	-	
			≤5	365	520	640	-	-	19	-	-	-	-	-	-	-	-	-	-	
			>5 ≤12	365	520	640	15	-	-	-	-	-	-	-	-	-	-	-	-	
JIS G 3106	SM 520 C	8-120	>12 ≤16	365	520	640	15	-	-	-	-	47	-	-	-	-	-	-		
			>16 ≤40	355	520	640	19	-	-	-	-	47	-	-	-	-	-	-	-	
			>40 ≤75	335	520	640	-	-	21	-	-	-	47	-	-	-	-	-	-	
			>75 <100	325	520	640	-	-	21	-	-	-	47	-	-	-	-	-	-	

General & Weldable Structural Steel - High Strength Steel (Yield Strength ± 320 - 400 Mpa)

SPECIFICATION	GRADE	Prod. Thick (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES																GENERAL PURPOSE
				TENSILE TEST								IMPACT TEST								
				TR								LG				TR				
				YS (N/mm ²)	TS (N/mm ²)			EL (%)				+20	0	-20	-40	+20	0	-20	-40	
Min	Min	Max	200	80	50	5.65V50	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG			
EN 10025-2:2004(PERUBAHAN DARI TAHUN 1993)	S 355 JR + AR	6 - 120	<3	355	510	680	-	16	-	-	27	-	-	-	-	-	-	-	-	
			≥ 3 ≤ 16	355	470	630	-	-	-	20	27	-	-	-	-	-	-	-	-	
			> 16 ≤ 40	345	470	630	-	-	-	20	27	-	-	-	-	-	-	-	-	
			> 40 ≤ 63	335	470	630	-	-	-	19	27	-	-	-	-	-	-	-	-	
			> 63 ≤ 80	325	470	630	-	-	-	18	27	-	-	-	-	-	-	-	-	
			> 80 ≤ 100	315	470	630	-	-	-	18	27	-	-	-	-	-	-	-	-	
			> 100 ≤ 150	295	450	600	-	-	-	18	27	-	-	-	-	-	-	-	-	
			> 150 ≤ 200	285	450	600	-	-	-	17	27	-	-	-	-	-	-	-	-	
			> 200 ≤ 250	275	450	600	-	-	-	17	27	-	-	-	-	-	-	-	-	
	S 355 JO + AR	6 - 120	< 3	355	510	680	-	16	-	-	-	27	-	-	-	-	-	-	-	
			≥ 3 ≤ 16	355	470	630	-	-	-	20	-	27	-	-	-	-	-	-	-	
			> 16 ≤ 40	345	470	630	-	-	-	20	-	27	-	-	-	-	-	-	-	
			> 40 ≤ 63	335	470	630	-	-	-	19	-	27	-	-	-	-	-	-	-	
			> 63 ≤ 80	325	470	630	-	-	-	18	-	27	-	-	-	-	-	-	-	
			> 80 ≤ 100	315	470	630	-	-	-	18	-	27	-	-	-	-	-	-	-	
			> 100 ≤ 150	295	450	600	-	-	-	18	-	27	-	-	-	-	-	-	-	
			> 150 ≤ 200	285	450	600	-	-	-	17	-	27	-	-	-	-	-	-	-	
			> 200 ≤ 250	275	450	600	-	-	-	17	-	27	-	-	-	-	-	-	-	
	S 355 J2 + N	6 - 120	< 3	355	510	680	-	16	-	-	-	-	-	27	-	-	-	-	-	
			≥ 3 ≤ 16	355	470	630	-	-	-	20	-	-	-	27	-	-	-	-	-	
			> 16 ≤ 40	345	470	630	-	-	-	20	-	-	-	27	-	-	-	-	-	
			> 40 ≤ 63	335	470	630	-	-	-	19	-	-	-	27	-	-	-	-	-	
			> 63 ≤ 80	325	470	630	-	-	-	18	-	-	-	27	-	-	-	-	-	
			> 80 ≤ 100	315	470	630	-	-	-	18	-	-	-	27	-	-	-	-	-	
			> 100 ≤ 150	295	450	600	-	-	-	18	-	-	-	27	-	-	-	-	-	
			> 150 ≤ 200	285	450	600	-	-	-	17	-	-	-	27	-	-	-	-	-	
			> 200 ≤ 250	275	450	600	-	-	-	17	-	-	-	27	-	-	-	-	-	
	S 355 K2 + N	6 - 120	< 3	355	510	680	-	16	-	-	-	-	-	40 ^B	-	-	-	-	-	
			≥ 3 ≤ 16	355	470	630	-	-	-	20	-	-	-	40 ^B	-	-	-	-	-	
			> 16 ≤ 40	345	470	630	-	-	-	20	-	-	-	40 ^B	-	-	-	-	-	
			> 40 ≤ 63	335	470	630	-	-	-	19	-	-	-	40 ^B	-	-	-	-	-	
			> 63 ≤ 80	325	470	630	-	-	-	18	-	-	-	40 ^B	-	-	-	-	-	
			> 80 ≤ 100	315	470	630	-	-	-	18	-	-	-	40 ^B	-	-	-	-	-	
			> 100 ≤ 150	295	450	600	-	-	-	18	-	-	-	40 ^B	-	-	-	-	-	
			> 150 ≤ 200	285	450	600	-	-	-	17	-	-	-	33	-	-	-	-	-	
			> 200 ≤ 250	275	450	600	-	-	-	17	-	-	-	33	-	-	-	-	-	
	EN 10025-3:2004	S 355 N	8 - 120	< 3	355	470	630	-	-	-	24	56	47	43	40	31	27	20	-	
				≥ 3 ≤ 16	355	470	630	-	-	-	24	56	47	43	40	31	27	20	-	
				> 16 ≤ 40	345	470	630	-	-	-	24	56	47	43	40	31	27	20	-	
				> 40 ≤ 63	335	470	630	-	-	-	24	56	47	43	40	31	27	20	-	
				> 63 ≤ 80	325	470	630	-	-	-	23	56	47	43	40	31	27	20	-	
				> 80 ≤ 100	315	470	630	-	-	-	23	56	47	43	40	31	27	20	-	
		S 355 NL	8 - 120	< 3	355	470	630	-	-	-	24	63	55	51	47	40	31	27	40	
				≥ 3 ≤ 16	355	470	630	-	-	-	24	63	55	51	47	40	31	27	40	
				> 16 ≤ 40	345	470	630	-	-	-	24	63	55	51	47	40	31	27	40	
> 40 ≤ 63				335	470	630	-	-	-	24	63	55	51	47	40	31	27	40		
> 63 ≤ 80				325	470	630	-	-	-	23	63	55	51	47	40	31	27	40		
> 80 ≤ 100				315	470	630	-	-	-	23	63	55	51	47	40	31	27	40		
EN 10025-4:2004	S 355 M	Aug-60	≤ 16	355	470	630	-	-	-	22	56	47	43	40	31	27	20	-		
			> 16 ≤ 40	345	470	630	-	-	-	22	56	47	43	40	31	27	20	-		
			> 40 ≤ 63	335	450	610	-	-	-	22	56	47	43	40	31	27	20	-		
			> 63 ≤ 80	325	440	600	-	-	-	22	56	47	43	40	31	27	20	-		
			> 80 ≤ 100	325	440	600	-	-	-	22	56	47	43	40	31	27	20	-		
			> 100 ≤ 150	320	430	590	-	-	-	22	56	47	43	40	31	27	20	-		
	S 355 ML	8 - 60	≤ 16	355	470	630	-	-	-	22	63	55	51	47	40	31	27	40		
			> 16 ≤ 40	345	470	630	-	-	-	22	63	55	51	47	40	31	27	40		
			> 40 ≤ 63	335	450	610	-	-	-	22	63	55	51	47	40	31	27	40		
			> 63 ≤ 80	325	440	600	-	-	-	22	63	55	51	47	40	31	27	40		
			> 80 ≤ 100	325	440	600	-	-	-	22	63	55	51	47	40	31	27	40		
			> 100 ≤ 150	320	430	590	-	-	-	22	63	55	51	47	40	31	27	40		
DIN 17100 (1980)	ST 52.3	6 - 80	≤ 16	355	490	630	20	-	-	-	-	-	27	-	-	-	-	-		
			> 16 ≤ 25	345	490	630	20	-	-	-	-	-	27	-	-	-	-	-		
			> 25 ≤ 40	345	490	630	20	-	-	-	-	-	27	-	-	-	-	-		
			> 40 ≤ 63	335	490	630	19	-	-	-	-	-	27	-	-	-	-	-		
			> 63 ≤ 80	325	490	630	18	-	-	-	-	-	23	-	-	-	-	-		
			> 80 ≤ 100	315	490	630	18	-	-	-	-	-	23	-	-	-	-	-		
	BS 4360 (1986)	50 A	6 - 120	≤ 16	355	490	640	18 ^C	20 ^A	-	20	-	-	-	-	-	-	-	-	
				> 16 ≤ 40	345	490	640	18	20	-	20	-	-	-	-	-	-	-	-	
				> 40 ≤ 63	340	490	640	18	20	-	20	-	-	-	-	-	-	-	-	
				> 63 ≤ 100	325	480	640	18	20	-	20	-	-	-	-	-	-	-	-	
				> 100 ≤ 150	305	460	640	18	20	-	20	-	-	-	-	-	-	-	-	
				> 150 ≤ 200	285	440	640	18	20	-	20	-	-	-	-	-	-	-	-	
50 B		6 - 120	≤ 16	355	490	640	18 ^C	20 ^A	-	20	27	-	-	-	-	-	-	-		
			> 16 ≤ 40	345	490	640	18	20	-	20	27	-	-	-	-	-	-	-		
			> 40 ≤ 63	340	490	640	18	20	-	20	27	-	-	-	-	-	-	-		
			> 63 ≤ 100	325	480	640	18	20	-	20	27	-	-	-	-	-	-	-		
			> 100 ≤ 150	305	460	640	18	20	-	20	27	-	-	-	-	-	-	-		
			> 150 ≤ 200	285	440	640	18	20	-	20	27	-	-	-	-	-	-	-		
50 C	6 - 120	≤ 16	355	490	640	18 ^C	20 ^A	-	20	-	27	-	-	-	-	-	-			
		> 16 ≤ 40	345	490	640	18	20	-	20	-	27	-	-	-	-	-	-			
		> 40 ≤ 63	340	490	640	18	20	-	20	-	27	-	-	-	-	-	-			
		> 63 ≤ 100	325	480	640	18	20	-	20	-	27	-	-	-	-	-	-			
		> 100 ≤ 150	305	460	640	18	20	-	20	-	27	-	-	-	-	-	-			
		> 150 ≤ 200	285	440	640	18	20	-	20	-	27	-	-	-	-	-	-			
50 D	6 - 120	≤ 16	355	490	640	18 ^C	20 ^A	-	20	-	27	-	-	-	-	-	-			
		> 16 ≤ 40	345	490	640	18	20	-	20	-	27	-	-	-	-	-	-			
		> 40 ≤ 63	340	490	640	18	20	-	20	-	27	-	-	-	-	-	-			
		> 63 ≤ 100	325	480	640	18	20	-	20	-	27	-	-	-	-	-	-			
		> 100 ≤ 150	305	460	640	18	20	-	20	-	27	-	-	-	-	-	-			
		> 150 ≤ 200	285	440	640	18	20	-	20	-	27	-	-	-	-	-	-			
50 DD	6 - 120	≤ 16	355	490	640	18 ^C	20 ^A	-	20	-	-	-	-	-	-	-	-			
		> 16 ≤ 40	345	490	640	18	20	-	20	-	-	-	-	-	-	-	-			
		> 40 ≤ 63	340	490	640	18	20	-	20	-	-	-	-	-	-	-	-			
		> 63 ≤ 100	325	480	640	18	20	-	20	-	-	-	-	-	-	-	-			
		> 100 ≤ 150	305	460	640	18	20	-	20	-	-	-	-	-	-	-	-			
		> 150 ≤ 200	285	440	640	18	20	-	20	-	-	-	-	-	-	-	-			

General & Weldable Structural Steel - High Strength Steel (Yield Strength $\pm$ 400 - 500 Mpa)

Specification	Grade	Prod. Thick (mm)	Thick. Range (mm)	Mechanical Properties														General Purpose		
				Tensile Test								Impact Test								
				TR								LG				TR				
				YS (N/mm ²)	TS (N/mm ²)		EL (%)				+20	0	-20	-40	+20	0	-20		-40	
	Min	Max	200	80	50	5.65 ψ 50	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG				
AS 3678 (2016)	350	8-100	≤ 8	360	450	-	-	-	20	-	-	-	-	-	-	-	-	-		
			$> 8 \leq 12$	360	450	-	-	-	20	-	-	-	-	-	-	-	-	-		
			$> 12 \leq 20$	350	450	-	-	-	20	-	-	-	-	-	-	-	-	-		
			$> 20 \leq 32$	340	450	-	-	-	20	-	-	-	-	-	-	-	-	-		
			$> 32 \leq 50$	340	450	-	-	-	20	-	-	-	-	-	-	-	-	-		
			$> 50 \leq 80$	340	450	-	-	-	20	-	-	-	-	-	-	-	-	-		
			$> 80 \leq 150$	330	450	-	-	-	20	-	-	-	-	-	-	-	-	-		
ASTM A 131	AH40	8 - 70	$> 6.4 \leq 12.5$	390	510	650	19	-	22	-	-	39	-	-	-	26	-	-		
			$> 12.5 \leq 20$	390	510	650	19	-	22	-	-	39	-	-	-	26	-	-		
			$> 20 \leq 25$	390	510	650	19	-	22	-	-	39	-	-	-	26	-	-		
			$> 25 \leq 35$	390	510	650	19	-	22	-	-	39	-	-	-	26	-	-		
			$> 35 \leq 50$	390	510	650	19	-	22	-	-	39	-	-	-	26	-	-		
			$> 50 \leq 70$	390	510	650	19	-	22	-	-	46	-	-	-	31	-	-		
			$> 70 \leq 100$	390	510	650	19	-	22	-	-	55	-	-	-	37	-	-		
	DH40	8 - 70	$> 6.4 \leq 12.5$	390	510	650	19	-	22	-	-	39	-	-	-	26	-	-		
			$> 12.5 \leq 20$	390	510	650	19	-	22	-	-	39	-	-	-	26	-	-		
			$> 20 \leq 25$	390	510	650	19	-	22	-	-	39	-	-	-	26	-	-		
			$> 25 \leq 35$	390	510	650	19	-	22	-	-	39	-	-	-	26	-	-		
			$> 35 \leq 50$	390	510	650	19	-	22	-	-	39	-	-	-	26	-	-		
			$> 50 \leq 70$	390	510	650	19	-	22	-	-	46	-	-	-	31	-	-		
			$> 70 \leq 100$	390	510	650	19	-	22	-	-	55	-	-	-	37	-	-		
	EH40	8 - 70	$> 6.4 \leq 12.5$	390	510	650	19	-	22	-	-	39	-	-	-	26	-	-		
			$> 12.5 \leq 20$	390	510	650	19	-	22	-	-	39	-	-	-	26	-	-		
			$> 20 \leq 25$	390	510	650	19	-	22	-	-	39	-	-	-	26	-	-		
			$> 25 \leq 35$	390	510	650	19	-	22	-	-	39	-	-	-	26	-	-		
			$> 35 \leq 50$	390	510	650	19	-	22	-	-	39	-	-	-	26	-	-		
			$> 50 \leq 70$	390	510	650	19	-	22	-	-	46	-	-	-	31	-	-		
			$> 70 \leq 100$	390	510	650	19	-	22	-	-	55	-	-	-	37	-	-		
ASTM A 572	60	6-40	≤ 40	415	520	-	16 ^M	-	18 ^M	-	-	-	-	-	-	-	-			
			> 40	415	520	-	16 ^M	-	18 ^M	-	-	-	-	-	-	-	-			
	65	6-40	≤ 40	450	550	-	15 ^A	-	17 ^A	-	-	-	-	-	-	-	-			
			> 40	450	550	-	15 ^A	-	17 ^A	-	-	-	-	-	-	-	-			
JIS G 3101	SS - 540	8-40	≤ 5	400	540	-	-	16	-	-	-	-	-	-	-	-	-			
			$> 5 < 16$	400	540	-	13	-	-	-	-	-	-	-	-	-	-			
			$> 16 < 40$	390	540	-	17	-	-	-	-	-	-	-	-	-	-			
JIS G 3106	SM 570	8-40	≤ 5	460	570	720	-	-	19	-	-	-	-	-	-	-	-			
			$> 5 \leq 16$	460	570	720	-	-	19	-	-	47 ^F	-	-	-	-	-			
			$> 16 \leq 50$	450	570	720	-	-	26(0: up to 20)	-	-	47	-	-	-	-	-			
			$> 50 \leq 75$	430	570	720	-	-	20	-	-	47	-	-	-	-	-			
			$> 75 \leq 100$	420	570	720	-	-	20	-	-	47	-	-	-	-	-			
EN 10025-4:2004	S 420 M	8 - 40	≤ 16	420	520	680	-	-	-	17	55	47	40	-	31	27	20	-		
			$> 16 \leq 30$	400	520	680	-	-	-	17	55	47	40	-	31	27	20	-		
			$> 30 \leq 40$	400	520	680	-	-	-	17	55	47	40	-	31	27	20	-		
			$> 40 \leq 63$	390	500	660	-	-	-	17	55	47	40	-	31	27	20	-		
			$> 63 \leq 100$	380	480	640	-	-	-	17	55	47	40	-	31	27	20	-		
			$> 100 \leq 150$	365	460	620	-	-	-	17	55	47	40	-	31	27	20	-		
			$> 150 \leq 200$	350	440	600	-	-	-	17	55	47	40	-	31	27	20	-		
	S 420 ML	8 - 40	≤ 16	420	520	680	-	-	-	17	63	55	47	31	40	34	27	20		
			$> 16 \leq 30$	400	520	680	-	-	-	17	63	55	47	31	40	34	27	20		
			$> 30 \leq 40$	400	520	680	-	-	-	17	63	55	47	31	40	34	27	20		
			$> 40 \leq 63$	390	500	660	-	-	-	17	63	55	47	31	40	34	27	20		
			$> 63 \leq 100$	380	480	640	-	-	-	17	63	55	47	31	40	34	27	20		
			$> 100 \leq 150$	365	460	620	-	-	-	17	63	55	47	31	40	34	27	20		
			$> 150 \leq 200$	350	440	600	-	-	-	17	63	55	47	31	40	34	27	20		
	S 460 M	18- 40	≤ 16	460	540	720	-	-	-	17	55	47	40	-	-	-	-	-		
			$> 16 \leq 30$	440	540	720	-	-	-	17	55	47	40	-	-	-	-	-		
			$> 30 \leq 40$	430	540	720	-	-	-	17	55	47	40	-	-	-	-	-		
			$> 40 \leq 63$	410	540	720	-	-	-	17	55	47	40	-	-	-	-	-		
			$> 63 \leq 100$	400	540	720	-	-	-	17	55	47	40	-	-	-	-	-		
			$> 100 \leq 150$	380	530	710	-	-	-	17	55	47	40	-	-	-	-	-		
			$> 150 \leq 200$	360	510	690	-	-	-	17	55	47	40	-	-	-	-	-		
EN 10025-4 (2004)	S 460 ML	18- 40	≤ 16	460	540	720	-	-	-	17	63	55	47	31	-	-	-	-		
			$> 16 \leq 30$	440	540	720	-	-	-	17	63	55	47	31	-	-	-	-		
			$> 30 \leq 40$	430	540	720	-	-	-	17	63	55	47	31	-	-	-	-		
			$> 40 \leq 63$	410	540	720	-	-	-	17	63	55	47	31	-	-	-	-		
			$> 63 \leq 100$	400	540	720	-	-	-	17	63	55	47	31	-	-	-	-		
			$> 100 \leq 150$	380	530	710	-	-	-	17	63	55	47	31	-	-	-	-		
			$> 150 \leq 200$	360	510	690	-	-	-	17	63	55	47	31	-	-	-	-		
	400	8- 40	≤ 8	400	480	-	-	-	-	18	-	-	-	-	-	-	-	-		
			$> 8 \leq 12$	400	480	-	-	-	-	18	-	-	-	-	-	-	-	-		
			$> 12 \leq 20$	380	480	-	-	-	-	18	-	-	-	-	-	-	-	-		
			$> 20 \leq 32$	360	480	-	-	-	-	18	-	-	-	-	-	-	-	-		
			$> 32 \leq 50$	360	480	-	-	-	-	18	-	-	-	-	-	-	-	-		
			$> 50 \leq 80$	360	480	-	-	-	-	18	-	-	-	-	-	-	-	-		
			$> 80 \leq 150$	-	480	-	-	-	-	18	-	-	-	-	-	-	-	-		
			$> 150 \leq 200$	-	-	-	-	-	-	18	-	-	-	-	-	-	-	-		
BS 4360 (1986)	55 C	8- 40	≤ 16	450	550	700	17	19	-	19	-	27	-	-	-	-	-			
			$> 16 \leq 40$	430	550	700	17	19	-	19	-	27	-	-	-	-	-			
			$> 40 \leq 63$	430	550	700	17	19	-	19	-	27	-	-	-	-	-			
			$> 63 \leq 100$	430	550	700	17	19	-	19	-	27	-	-	-	-	-			
	55 EE	8- 40	$> 100 \leq 150$	430	550	700	17	19	-	19	-	27	-	-	-	-	-			
			≤ 16	450	550	700	17	19	-	19	-	-	-	27	-	-	-	-		
			$> 16 \leq 40$	430	550	700	17	19	-	19	-	-	-	27	-	-	-	-		
			$> 40 \leq 63$	430	550	700	17	19	-	19	-	-	-	27	-	-	-	-		
			$> 63 \leq 100$	430	550	700	17	19	-	19	-	-	-	27	-	-	-	-		
			$> 100 \leq 150$	430	550	700	17	19	-	19	-	-	-	27	-	-	-	-		

Pressure Vessel - Mild Steel

SPECIFICATION	GRADE	Prod. Thick (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES																GENERAL PURPOSE
				TENSILE TEST								IMPACT TEST								
				TR								LG				TR				
				YS (N/mm²)	TS (N/mm²)			EL (%)				+20	0	-20	-40	+20	0	-20	-40	
Min	Min	Max	200	80	50	5.65V50	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG				
ASTM A 285 / ASME SA 285	A	5 - 50	-	165	310	450	27	-	30	-	-	-	-	-	-	-	-	LOW AND INTERMEDIATE TENSILE STRENGTH PRESSURE VESSEL PLATES		
	B	5 - 50	-	185	345	485	25	-	28	-	-	-	-	-	-	-	-			
	C	5 - 50	-	205	380	515	23	-	27	-	-	-	-	-	-	-	-			
ASME SA 516	55	5 - 80	≤ 12.5	205	380	515	23	-	27	-	-	-	-	-	-	-	-	PRESSURE VESSEL PLATES, CARBON STEEL FOR MODERATE AND LOW TEMPERATURE SERVICE		
			> 12.5 ≤ 50	205	380	515	23	-	27	-	-	-	-	-	-	-	-			
			> 50 ≤ 100	205	380	515	23	-	27	-	-	-	-	-	-	-	-			
	> 100 ≤ 200	205	380	515	23	-	27	-	-	-	-	-	-	-	-	-				
	60	5 - 80	≤ 12.5	220	415	550	21	-	25	-	-	-	-	-	-	-	-		-	
			> 12.5 ≤ 50	220	415	550	21	-	25	-	-	-	-	-	-	-	-		-	
			> 50 ≤ 100	220	415	550	21	-	25	-	-	-	-	-	-	-	-		-	
			> 100 ≤ 200	220	415	550	21	-	25	-	-	-	-	-	-	-	-		-	
EN 10028	P 235 GH	6 - 80	≤ 16	235	360	480	-	-	-	24	40	34	27	-	-	-	-	-	WELDABLE FINE GRAIN STEELS FOR PRESSURE PURPOSES	
			> 16 ≤ 40	225	360	480	-	-	-	24	40	34	27	-	-	-	-	-		
			> 40 ≤ 60	215	360	480	-	-	-	24	40	34	27	-	-	-	-	-		
			> 60 ≤ 100	200	360	480	-	-	-	24	40	34	27	-	-	-	-	-		
			> 100 ≤ 150	185	350	480	-	-	-	24	40	34	27	-	-	-	-	-		
			> 150 ≤ 250	170	340	480	-	-	-	24	40	34	27	-	-	-	-	-		
	P 265 GH	6 - 80	≤ 16	265	410	530	-	-	-	22	40	34	27	-	-	-	-	-	WELDABLE FINE GRAIN STEELS FOR PRESSURE PURPOSES	
			> 16 ≤ 40	255	410	530	-	-	-	22	40	34	27	-	-	-	-	-		
			> 40 ≤ 60	245	410	530	-	-	-	22	40	34	27	-	-	-	-	-		
			> 60 ≤ 100	215	410	530	-	-	-	22	40	34	27	-	-	-	-	-		
			> 100 ≤ 150	200	400	530	-	-	-	22	40	34	27	-	-	-	-	-		
			> 150 ≤ 250	185	390	530	-	-	-	22	40	34	27	-	-	-	-	-		
EN 10028-3 (2009)	P 275 NH	6 - 80	≤ 16	275	390	510	-	-	-	24	75	65	45	-	50	40	30	-	WELDABLE FINE GRAIN STEELS FOR PRESSURE PURPOSES	
			> 16 ≤ 40	265	390	510	-	-	-	24	75	65	45	-	50	40	30	-		
			> 40 ≤ 60	255	390	510	-	-	-	24	-	-	-	-	50	40	30	-		
			> 60 ≤ 100	235	370	490	-	-	-	23	-	-	-	-	50	40	30	-		
	P 275 NLI	6 - 80	≤ 16	275	390	510	-	-	-	24	80	70	50	40	60	50	35	27	WELDABLE FINE GRAIN STEELS FOR PRESSURE PURPOSES	
			> 16 ≤ 40	265	390	510	-	-	-	24	80	70	50	40	60	50	35	27		
			> 40 ≤ 60	255	390	510	-	-	-	24	-	-	-	-	60	50	35	27		
			> 60 ≤ 100	235	370	490	-	-	-	23	-	-	-	-	60	50	35	27		

Pressure Vessel - High Strength Steel (Yield Strength ± 320 - 400 Mpa)

SPECIFICATION	GRADE	Prod. Thick (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES																GENERAL PURPOSE
				TENSILE TEST								IMPACT TEST								
				TR								LG				TR				
				YS (N/mm²)	TS (N/mm²)			EL (%)				+20	0	-20	-40	+20	0	-20	-40	
	Min	Min	Max	200	80	50	5.65V50	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG			
ASME SA 537	Class 1	8 - 60	≤ 40	345	485	620	18	-	22	-	-	-	-	-	-	-	-	-	PRESSURE VESSEL PLATES, HEAT TREATED, CARBON-MANGANESE- SILICON STEEL	
			>40 ≤65	345	485	620	18	-	22	-	-	-	-	-	-	-	-	-		
			>65 ≤100	310	450	585	18	-	22	-	-	-	-	-	-	-	-	-		
ASME SA 516 / ASTM A 516	65	6 - 80	≤ 12.5	240	450	585	19	-	23	-	-	-	-	-	-	-	-	-	PRESSURE VESSEL PLATES, CARBON STEEL FOR MODERATE AND LOW TEMPERATURE SERVICE	
			> 12.5 ≤ 50	240	450	585	19	-	23	-	-	-	-	-	-	-	-	-		
			> 50 ≤ 100	240	450	585	19	-	23	-	-	-	-	-	-	-	-	-		
	70	7 - 80	> 100 ≤ 200	240	450	585	19	-	23	-	-	-	-	-	-	-	-	-		
			≤ 12.5	260	485	620	17	-	21	-	-	-	-	-	-	-	-	-		
			> 12.5 ≤ 50	260	485	620	17	-	21	-	-	-	-	-	-	-	-	-		
			> 50 ≤ 100	260	485	620	17	-	21	-	-	-	-	-	-	-	-	-		
			> 100 ≤ 200	260	485	620	17	-	21	-	-	-	-	-	-	-	-	-		
EN 10028-2 (2003)	P 295 GH	6 - 80	≤ 16	295	460	580	-	-	-	21	-	-	-	-	-	-	-	40	NON ALLOY STEELS WITH SPECIFIED ELEVATED TEMPERATURE PROPERTIES	
			> 16 ≤ 40	290	460	580	-	-	-	21	-	-	-	-	-	-	-	40		
			> 40 ≤ 60	285	460	580	-	-	-	21	-	-	-	-	-	-	-	40		
			> 60 ≤ 100	260	460	580	-	-	-	21	-	-	-	-	-	-	-	40		
			> 100 ≤ 150	235	440	570	-	-	-	21	-	-	-	-	-	-	-	40		
			> 150 ≤ 250	220	430	570	-	-	-	21	-	-	-	-	-	-	-	40		
	P 355 GH	6 - 80	≤ 16	355	510	650	-	-	-	20	40	34	27	-	-	-	-	-	NON ALLOY STEELS WITH SPECIFIED ELEVATED TEMPERATURE PROPERTIES	
			> 16 ≤ 40	345	510	650	-	-	-	20	40	34	27	-	-	-	-	-		
			> 40 ≤ 60	335	510	650	-	-	-	20	40	34	27	-	-	-	-	-		
			> 60 ≤ 100	315	490	630	-	-	-	20	40	34	27	-	-	-	-	-		
EN 10028-3 (2009)	P 355 N	8 - 80	≤ 16	355	490	630	-	-	-	22	75	65	45	-	50	40	30	-	WELDABLE FINE GRAIN STEELS FOR PRESSURE PURPOSES	
			> 16 ≤ 40	345	490	630	-	-	-	22	75	65	45	-	50	40	30	-		
			> 40 ≤ 60	335	490	630	-	-	-	22	-	-	-	-	50	40	30	-		
			> 60 ≤ 100	315	470	610	-	-	-	21	-	-	-	-	50	40	30	-		
	P 355 NH	8 - 80	≤ 16	355	490	630	-	-	-	22	75	65	45	-	50	40	30	-	WELDABLE FINE GRAIN STEELS FOR PRESSURE PURPOSES	
			> 16 ≤ 40	345	490	630	-	-	-	22	75	65	45	-	50	40	30	-		
			> 40 ≤ 60	335	490	630	-	-	-	22	-	-	-	-	50	40	30	-		
			> 60 ≤ 100	315	470	610	-	-	-	21	-	-	-	-	50	40	30	-		
	P 355 NL1	8 - 80	≤ 16	355	490	630	-	-	-	22	80	70	50	40	60	50	35	27	WELDABLE FINE GRAIN STEELS FOR PRESSURE PURPOSES	
			> 16 ≤ 40	345	490	630	-	-	-	22	80	70	50	40	60	50	35	27		
			> 40 ≤ 60	335	490	630	-	-	-	22	-	-	-	-	60	50	35	27		
			> 60 ≤ 100	315	470	610	-	-	-	21	-	-	-	-	60	50	35	27		
EN 10028-5 (2009)	P 355 M	8 - 63	≤ 16	355	450	610	-	-	-	22	-	-	-	-	60	40	27	-	WELDABLE FINE GRAIN STEELS FOR PRESSURE PURPOSES	
			> 16 ≤ 40	355	450	610	-	-	-	22	-	-	-	-	60	40	27	-		
			> 40 ≤ 63	345	450	610	-	-	-	22	-	-	-	-	60	40	27	-		
	P 355 ML1	8 - 63	≤ 16	355	450	610	-	-	-	22	-	-	-	-	-	60	40	27	WELDABLE FINE GRAIN STEELS FOR PRESSURE PURPOSES	
			> 16 ≤ 40	355	450	610	-	-	-	22	-	-	-	-	-	60	40	27		
			> 40 ≤ 63	345	450	610	-	-	-	22	-	-	-	-	-	60	40	27		

Pressure Vessel - High Strength Steel (Yield Strength ± 400 - 500 Mpa)

SPECIFICATION	GRADE	Prod. Thick (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES																GENERAL PURPOSE
				TENSILE TEST								IMPACT TEST								
				TR				EL (%)				LG				TR				
				YS (N/mm ²)	TS (N/mm ²)							+20	0	-20	-40	+20	0	-20	-40	
	Min	Min	Max	200	80	50	5.65V _{So}	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG			
EN 10028-5 (2009)	P 420 M	8 - 63	≤ 16	420	500	660	-	-	-	19	-	-	-	-	60	40	27	-	WELDABLE FINE GRAIN STEELS FOR PRESSURE PURPOSES	
			> 16 ≤ 40	400	500	660	-	-	-	19	-	-	-	-	-	-	-	-		
			> 40 ≤ 63	390	500	660	-	-	-	19	-	-	-	-	-	-	-	-		
	P 420 ML1	8 - 63	≤ 16	420	500	660	-	-	-	19	-	-	-	-	60	40	27	-	WELDABLE FINE GRAIN STEELS FOR PRESSURE PURPOSES	
			> 16 ≤ 40	400	500	660	-	-	-	19	-	-	-	-	-	-	-	-		
			> 40 ≤ 63	390	500	660	-	-	-	19	-	-	-	-	-	-	-	-		
	P 460 M	8 - 40	≤ 16	460	530	720	-	-	-	17	-	-	-	-	60	40	27	-	WELDABLE FINE GRAIN STEELS FOR PRESSURE PURPOSES	
			> 16 ≤ 40	440	530	720	-	-	-	17	-	-	-	-	-	-	-	-		
	P 460 ML1	8 - 40	≤ 16	460	530	720	-	-	-	17	-	-	-	-	-	60	40	27	WELDABLE FINE GRAIN STEELS FOR PRESSURE PURPOSES	
			> 16 ≤ 40	440	530	720	-	-	-	17	-	-	-	-	-	-	-	-		

Line Pipe Steel - High Strength Steel (Yield Strength ± 320 - 400 Mpa)

SPECIFICATION	GRADE	Prod. Thick (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES														GENERAL PURPOSE		
				TENSILE TEST							IMPACT TEST									
				TR							LG				TR					
				YS (N/mm ²) Min	TS (N/mm ²) Min Max		EL (%) 200 80 50			5.65V _{So}	+20 AVG	0 AVG	-20 AVG	-40 AVG	+20 AVG	0 AVG	-20 AVG		-40 AVG	
API 5L PSL 1 Welded Pipe	X 46	8 - 25	≤ 25	320 - 525	4357	60	----					-4	0-							LINE PIPE STEEL
	X 52	8 - 25	≤ 25	360 - 530	4607	60	----					-4	0-							
	X 56	8 - 25	≤ 25	390 - 545	4907	60	----					-4	0-							
API 5L PSL 2 Welded Pipe	X 46M	8 - 25	≤ 25	320 - 525	4357	60	----					-4	0-							LINE PIPE STEEL
	X 52M	8 - 25	≤ 25	360 - 530	4607	60	----					-4	0-							
	X 56M	8 - 25	≤ 25	390 - 545	4907	60	----					-4	0-							

Line Pipe Steel - High Strength Steel (Yield Strength ± 400 - 500 Mpa)

SPECIFICATION	GRADE	Prod. Thick (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES														GENERAL PURPOSE
				TENSILE TEST							IMPACT TEST							
				TR							LG				TR			
				YS (N/mm ²)	TS (N/mm ²)		EL (%)				+20	0	-20	-40	+20	0	-20	
Min	Min	Max	200	80	50	5.65V _{So}	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG		
API 5L PSL 1	X 60	8 - 25	≤ 25	415 - 565	5207	60	----	-4	0-								-	PIPELINE STEEL
	X 65	8 - 25	≤ 25	450 - 600	5357	60	----	-4	0-								-	
	X 70	8 - 25	≤ 25	485 - 635	5707	60	----	-4	0-								-	
API 5L PSL 2	X 60M8	- 25	≤ 25	415 - 565	5207	60	----	-4	0-								-	PIPELINE STEEL
	X 65M8	- 25	≤ 25	450 - 600	5357	60	----	-4	0-								-	
	X 70M8	- 25	≤ 25	485 - 635	5707	60	----	-4	0-								-	
																	-	

Weather Resistant Steel - Mild Steel

SPECIFICATION	GRADE	Prod. Thick (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES																GENERAL PURPOSE
				TENSILE TEST								IMPACT TEST								
				TR								LG				TR				
				YS (N/mm ²)		TS (N/mm ²)		EL (%)				+20	0	-20	-40	+20	0	-20	-40	
Min	Max	Min	Max	200	80	50	5.65V _{So}	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG			
JIS 3114:2008	SMA400AW	6-150	≤5	245	400	540	-	22	-	-	-	-	-	-	-	-	-	-		
			>5 ≤16	245	400	540	17	-	-	-	-	-	-	-	-	-	-	-		
			>16 ≤40	235	400	540	21	-	-	-	-	-	-	-	-	-	-	-		
			>40 ≤50	215	400	540	21	-	-	-	-	-	-	-	-	-	-	-		
			>50 ≤75	215	400	540	-	23	-	-	-	-	-	-	-	-	-	-		
			>75 ≤100	215	400	540	-	23	-	-	-	-	-	-	-	-	-	-		
			>100 ≤150	205	400	540	-	23	-	-	-	-	-	-	-	-	-	-		
	SMA400AP	6-150	≤5	245	400	540	-	22	-	-	-	-	-	-	-	-	-	-		
			>5 ≤16	245	400	540	17	-	-	-	-	-	-	-	-	-	-	-		
			>16 ≤40	235	400	540	21	-	-	-	-	-	-	-	-	-	-	-		
			>40 ≤50	215	400	540	21	-	-	-	-	-	-	-	-	-	-	-		
			>50 ≤75	215	400	540	-	23	-	-	-	-	-	-	-	-	-	-		
			>75 ≤100	215	400	540	-	23	-	-	-	-	-	-	-	-	-	-		
			>100 ≤150	205	400	540	-	23	-	-	-	-	-	-	-	-	-	-		
	SMA400BW	6-150	≤5	245	400	540	-	22	-	-	-	27	-	-	-	-	-	-		
			>5 ≤16	245	400	540	17	-	-	-	-	27	-	-	-	-	-	-		
			>16 ≤40	235	400	540	21	-	-	-	-	27	-	-	-	-	-	-		
			>40 ≤50	215	400	540	21	-	-	-	-	27	-	-	-	-	-	-		
			>50 ≤75	215	400	540	-	23	-	-	-	27	-	-	-	-	-	-		
			>75 ≤100	215	400	540	-	23	-	-	-	27	-	-	-	-	-	-		
			>100 ≤150	205	400	540	-	23	-	-	-	27	-	-	-	-	-	-		
	SMA400BP	6-150	≤5	245	400	540	-	22	-	-	-	27	-	-	-	-	-	-		
			>5 ≤16	245	400	540	17	-	-	-	-	27	-	-	-	-	-	-		
			>16 ≤40	235	400	540	21	-	-	-	-	27	-	-	-	-	-	-		
			>40 ≤50	215	400	540	21	-	-	-	-	27	-	-	-	-	-	-		
			>50 ≤75	215	400	540	-	23	-	-	-	27	-	-	-	-	-	-		
			>75 ≤100	215	400	540	-	23	-	-	-	27	-	-	-	-	-	-		
			>100 ≤150	205	400	540	-	23	-	-	-	27	-	-	-	-	-	-		
	SMA400CW	6-150	≤5	245	400	540	-	22	-	-	-	47	-	-	-	-	-	-		
			>5 ≤16	245	400	540	17	-	-	-	-	47	-	-	-	-	-	-		
			>16 ≤40	235	400	540	21	-	-	-	-	47	-	-	-	-	-	-		
			>40 ≤50	215	400	540	21	-	-	-	-	47	-	-	-	-	-	-		
			>50 ≤75	215	400	540	-	23	-	-	-	47	-	-	-	-	-	-		
>75 ≤100			215	400	540	-	23	-	-	-	47	-	-	-	-	-	-			
>100 ≤150			205	400	540	-	23	-	-	-	47	-	-	-	-	-	-			
SMA400CP	6-150	≤5	245	400	540	-	22	-	-	-	47	-	-	-	-	-	-			
		>5 ≤16	245	400	540	17	-	-	-	-	47	-	-	-	-	-	-			
		>16 ≤40	235	400	540	21	-	-	-	-	47	-	-	-	-	-	-			
		>40 ≤50	215	400	540	21	-	-	-	-	47	-	-	-	-	-	-			
		>50 ≤75	215	400	540	-	23	-	-	-	47	-	-	-	-	-	-			
		>75 ≤100	215	400	540	-	23	-	-	-	47	-	-	-	-	-	-			
		>100 ≤150	205	400	540	-	23	-	-	-	47	-	-	-	-	-	-			

High Strength Low Alloy

SPEC.	GRADE	Prod. Thick. (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES																		GENERAL PURPOSE					
				TENSILE TEST										IMPACT TEST													
				LG			TR							LG				TR									
				YS (N/mm ²) Min	TS (N/mm ²) Min	Max	200	80	EL (%)	5.65VSo	YS (N/mm ²) Min	Min	Max	200	80	50	5.65VSo	+20 AVG	0 AVG	-20 AVG	-40 AVG		+20 AVG	0 AVG	-20 AVG	-40 AVG	
A. B. S.	A	5-70	-70	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	-	-	-	-	-	-	-	
	B	5-70	-70	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	27 ^A	-	-	-	20	-	-	
	D	5-70	-70	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	-	27	-	-	-	20	-	
	E	5-70	-70	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	-	27	-	-	-	20	-	
	AH32	8-70	-70	-	-	-	-	-	-	-	-	315	440	570	-	-	-	22	-	31	-	-	-	22	-	-	
	DH32	8-70	-70	-	-	-	-	-	-	-	-	315	440	570	-	-	-	22	-	-	31	-	-	-	22	-	
	EH32	8-70	-70	-	-	-	-	-	-	-	-	315	440	570	-	-	-	22	-	-	-	31	-	-	-	22	
	AH36	8-70	-70	-	-	-	-	-	-	-	-	355	490	620	-	-	-	21	-	34	-	-	-	24	-	-	
	DH36	8-70	-70	-	-	-	-	-	-	-	-	355	490	620	-	-	-	21	-	-	34	-	-	-	24	-	
	EH36	8-70	-70	-	-	-	-	-	-	-	-	355	490	620	-	-	-	21	-	-	34	-	-	-	24	-	
AH40	8-70	-70	-	-	-	-	-	-	-	-	390	510	650	-	-	-	20	-	39	-	-	-	26	-	-		
DH40	8-70	-70	-	-	-	-	-	-	-	-	390	510	650	-	-	-	20	-	-	39	-	-	-	26	-		
EH40	8-70	-70	-	-	-	-	-	-	-	-	390	510	650	-	-	-	20	-	-	39	-	-	-	26	-		
ACharpy V-notch Impact test tidak dibutuhkan untuk ketebalan < 25 mm																											
Untuk ABS Grade A/B/D/E dan AH/DH/EH 32/36/40 bisa supply dengan Z35 dengan maksimum tebal 70 mm																											
B. K. I.	A	5-70	≤S0	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	-	-	-	-	-	-	-	
	B	6-70	≤S0	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	27 ^B	-	-	-	20	-	-	
			>S0 ≤S0	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	27 ^B	-	-	-	20	-	-	
	D	6-70	≤S35	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	-	27	-	-	-	20	-	
			>S35 ≤S0	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	-	27	-	-	-	20	-	
	E	6-70	≤S60	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	-	27	-	-	-	-	20	
	A32	8-70	≤S0	-	-	-	-	-	-	-	-	315	440	570	-	-	-	22	-	31	-	-	-	22	-	-	
	D32	8-70	≤S0	-	-	-	-	-	-	-	-	315	440	570	-	-	-	22	-	-	31	-	-	-	22	-	
	E32	8-70	≤S0	-	-	-	-	-	-	-	-	315	440	570	-	-	-	22	-	-	-	31	-	-	-	22	
	A36	8-70	≤S0	-	-	-	-	-	-	-	-	355	490	630	-	-	-	21	-	34	-	-	-	24	-	-	
	D36	8-70	≤S0	-	-	-	-	-	-	-	-	355	490	630	-	-	-	21	-	-	34	-	-	-	24	-	
	E36	8-70	≤S0	-	-	-	-	-	-	-	-	355	490	630	-	-	-	21	-	-	34	-	-	-	24	-	
	A40	8-70	≤S0	-	-	-	-	-	-	-	-	390	510	660	-	-	-	20	-	39	-	-	-	26	-	-	
	D40	8-70	≤S0	-	-	-	-	-	-	-	-	390	510	660	-	-	-	20	-	-	39	-	-	-	26	-	
E40	8-70	≤S0	-	-	-	-	-	-	-	-	390	510	660	-	-	-	20	-	-	-	39	-	-	-	26		
GCharpy V-notch Impact test umumnya tidak diperlukan untuk ketebalan < 25 mm. Untuk BKI Grade E dan E 40 bisa supply dengan Z35 dengan maksimum tebal 70 mm.																											
B. V.	A	8-50	8-50	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	-	-	-	-	-	-	-	
	B	8-50	8-50	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	27 ^A	-	-	-	20	-	-	
	D	8-35	8-35	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	-	27	-	-	-	20	-	
	AH36	8-50	8-50	-	-	-	-	-	-	-	-	355	490	630	-	-	-	21	-	34	-	-	-	24	-	-	
	DH36	8-50	8-50	-	-	-	-	-	-	-	-	355	490	630	-	-	-	21	-	-	34	-	-	-	24	-	
	EH36	8-50	8-50	-	-	-	-	-	-	-	-	355	490	630	-	-	-	21	-	-	34	-	-	-	24	-	
	AH40	8-32	8-30	-	-	-	-	-	-	-	-	390	510	660	-	-	-	20	-	39	-	-	-	26	-	-	
	DH40	8-32	8-30	-	-	-	-	-	-	-	-	390	510	660	-	-	-	20	-	-	39	-	-	-	26	-	
	EH40	8-32	8-30	-	-	-	-	-	-	-	-	390	510	660	-	-	-	20	-	-	-	39	-	-	-	26	
	LCharpy V-notch Impact test umumnya tidak diperlukan untuk ketebalan < 25 mm																										
D. N. V. G.L	A	8-50	8-50	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	-	-	-	-	-	-	-	
	B	8-50	8-50	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	27 ^B	-	-	-	20	-	-	
	D	8-35	8-50	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	-	27	-	-	-	20	-	
	AH36	8-50	8-50	-	-	-	-	-	-	-	-	355	490	620	-	-	-	21	-	34	-	-	-	24	-	-	
	DH36	8-50	8-50	-	-	-	-	-	-	-	-	355	490	620	-	-	-	21	-	-	34	-	-	-	24	-	
	EH36	8-50	8-50	-	-	-	-	-	-	-	-	355	490	620	-	-	-	21	-	-	34	-	-	-	24	-	
	AH40	8-30	8-30	-	-	-	-	-	-	-	-	390	510	650	-	-	-	20	-	41	-	-	-	27	-	-	
	DH40	8-30	8-30	-	-	-	-	-	-	-	-	390	510	650	-	-	-	20	-	-	41	-	-	-	27	-	
EH40	8-30	8-30	-	-	-	-	-	-	-	-	390	510	650	-	-	-	20	-	-	-	41	-	-	-	27		
PCharpy V-notch Impact test umumnya tidak diperlukan untuk ketebalan < 25 mm. Untuk DNVGL grade A & B product Coll & Strip bisa supply Z35 dengan maksimum tebal 16mm.																											
L.R.	A	-50	-50	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	27 ^S	-	-	-	-	-	-	
	B	5-200	-50	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	27 ^I	-	-	-	-	-	-	
	AH36	8-50	-50	-	-	-	-	-	-	-	-	355	490	620	-	-	-	21	-	34	-	-	-	-	-	-	
	DH36	8-50	-50	-	-	-	-	-	-	-	-	355	490	620	-	-	-	21	-	-	34	-	-	-	-	-	
	EH36	8-50	-50	-	-	-	-	-	-	-	-	355	490	620	-	-	-	21	-	-	34	-	-	-	-	-	
	AH40	8-50	-50	-	-	-	-	-	-	-	-	355	510	650	-	-	-	20	-	39	-	-	-	-	-	-	
	DH40	8-50	-50	-	-	-	-	-	-	-	-	390	510	650	-	-	-	20	-	-	39	-	-	-	-	-	
	EH40	8-50	-50	-	-	-	-	-	-	-	-	390	510	650	-	-	-	20	-	-	39	-	-	-	-	-	
360 AR	5-40	-40	-	-	-	-	-	-	-	-	190	360	480	-	-	-	24	-	-	-	-	-	-	-	-		
410 AR	5-40	-40	-	-	-	-	-	-	-	-	215	410	530	-	-	-	22	-	-	-	-	-	-	-	-		
SCharpy V-notch Impact test tidak diperlukan untuk ketebalan < 50 mm																											
N.K	A	-50	-50	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	-	-	-	-	-	-	-	
	B	-50	-50	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	27 ^A	-	-	-	20	-	-	
			≤S35	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	-	27	-	-	-	20	-	
	D	-50	>35 ≤S0	-	-	-	-	-	-	-	-	235	400	520	-	-	-	22	-	-	27	-	-	-	20	-	
	AH32	8-50	8-50	-	-	-	-	-	-	-	-	355	490	620	-	-	-	21	-	31	-	-	-	22	-	-	
	DH32	8-50	8-50	-	-	-	-	-	-	-	-	355	490	620	-	-	-	21	-	-	31	-	-	-	22	-	
AH36	8-50	8-50	-	-	-	-	-	-	-	-	355	490	620	-	-	-	21	-	34	-	-	-	24	-	-		
DH36	8-50	8-50	-	-	-	-	-	-	-	-	355	490	620	-	-	-	21	-	-	34	-	-	-	24	-		

Specification	Grade	Product Thickness (mm)	Mechanical Properties						Application	Remarks	
			Thickness Range (mm)	Tensile Test (TR)			Bend Test	Impact Test (LG)			
				YS min. (N/mm²)	UTS (N/mm²)	E min. (%)		LG (Average Temp.)			TR (Average Temp.)
AS/NBS 9999 ABRS Certificate No. 999202	999	8 0 999	≥ 8 ≤ 12	999	999 min	20 (9.999So)	9	9	STRUTURAL STEEL 999 T ROLLER PLATES 999PLATES AN9 SLABS		
			> 12 ≤ 20	999	999 min	20 (9.999So)	9	9			
			> 20 ≤ 32	999	999 min	20 (9.999So)	9	9			
			> 32 ≤ 50	999	999 min	20 (9.999So)	9	9			
			> 50 ≤ 80	999	999 min	20 (9.999So)	9	9			
			> 80 ≤ 100	999	999 min	20 (9.999So)	9	9			
			999	8 0 92	≥ 8 ≤ 12	999	999 min	20 (9.999So)		9	9
	> 12 ≤ 20	999	999 min		20 (9.999So)	9	9				
	> 20 ≤ 32	999	999 min		20 (9.999So)	9	9				

Offshore Structure - Mild Steel

SPECIFICATION	GRADE	Prod. Thick (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES														GENERAL PURPOSE
				TENSILE TEST							IMPACT TEST							
				TR							LG				TR			
				YS (N/mm ²)	TS (N/mm ²)		EL (%)			+20	0	-20	-40	+20	0	-20	-40	
				Min	Min	Max	200	80	50	5.65S ₀	AVG	AVG	AVG	AVG	AVG	AVG	AVG	
API 2H	42	8 - 80	≤ 63.5	289	427	565	18	-	22	-	-	-	-	-	-	-	34	NORMALIZED PLATE FOR OFFSHORE STRUCTURE
		> 63.5	289	427	565	18	-	22	-	-	-	-	-	-	-	34		

Offshore Structure - High Strength Steel (Yield Strength ± 320 - 400 Mpa)

SPECIFICATION	GRADE	Prod. Thick (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES														GENERAL PURPOSE		
				TENSILE TEST								IMPACT TEST								
				TR								LG								
				YS (N/mm ²)	TS (N/mm ²)		EL (%)			+20	0	-20	-40	+20	0	-20	-40			
					Min	Min	Max	200	80										50	5.65V ₅₀
API 2H	50	6-80	≤ 63.5	345	483	620	16	-	21	-	-	-	-	-	-	-	-	41	NORMALIZED PLATE FOR OFFSHORE STRUCTURES	
		6-80	> 63.5	324	483	620	16	-	21	-	-	-	-	-	-	-	-	41		
API 2W	50	6-80	≤ 40	448	-	18	-	23	-	-	-	-	-	-	-	-	-	41	STEEL PLATES FOR OFFSHORE STRUCTURES PRODUCED BY TMC	
		6-80	> 40 ≤ 90	448	-	18	-	23	-	-	-	-	-	-	-	-	-	41		

Offshore Structure - High Strength Steel (Yield Strength ± 400 - 500 Mpa)

SPECIFICATION	GRADE	Prod. Thick (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES														GENERAL PURPOSE	
				TENSILE TEST							IMPACT TEST								
				TR							LG				TR				
				YS (N/mm ²)	TS (N/mm ²)		EL (%)				+20	0	-20	-40	+20	0	-20		-40
					Min	Max	200	80	50	5.65V50	AVG	AVG	AVG	AVG	AVG	AVG	AVG		AVG
API 2W	60	6 - 40	≤ 40	414	517	-	16	-	22	-	-	-	-	-	-	-	48	STRUCTURAL STEEL FOR OFFSHORE	
			> 40 ≤ 100	414	517	-	16	-	22	-	-	-	-	-	-	-	48		

High Carbon - Steel Plate

SPECIFICATION	GRADE	Prod. Thick (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES												GENERAL PURPOSE	
				TENSILE TEST							IMPACT TEST						
				TR							LG				TR		
				YS (N/mm ²)	TS (N/mm ²)		EL (%)			+20	0	-20	-40	-20	-40		
Min	Min	Max	200	80	50	5.65xS ₀	AVG	AVG	AVG	AVG	AVG	AVG					
ASTM A830	1042	≤ 120	-	-	-	-	-	-	-	-	-	-	-	-	CARBON STEEL, STRUCTURAL QUALITY		
	1045	≤ 120	-	-	-	-	-	-	-	-	-	-	-	-			
JIS G 4051:2009	S45C	≤ 120	-	-	-	-	-	-	-	-	-	-	-	-	Carbon Steel		
	C45	≤ 120	-	-	-	-	-	-	-	-	-	-	-	-			
EN 10083-2	C45	≤ 120	-	-	-	-	-	-	-	-	-	-	-	-	NON ALLOY STEELS		
	C45 + N	≤ 120	≤ 16	340	620	-	14	-	-	-	-	-	-	-			
AS 3678: 2011	K1042	≤ 120	≤16 ≤100	305	580	-	-	16	-	-	-	-	-	-	NON ALLOY STEELS		
		≤ 120	≤16 ≤100	305	580	-	-	16	-	-	-	-	-	-			
		≤ 120	-	-	-	-	-	-	-	-	-	-	-	-	Hot Rolled Steels - Plates		



Normalizing Furnance

As a result of continual expansion, Gunung Raja Paksi are pleased to announce that we are capable of producing normalized plates, which includes pressure vessel grades such as ASTM A516 and A537 Cl-1 plates. This grade requires heat treatment (normalizing) to achieve better plate quality.

Shotblasting Painting

We also have a shotblasting and painting facility which is commonly applied to steel for shipbuilding purposes, or as per customer requirement.



Hot Rolled Coil

We can also supply flat products in coil form, whether it is hot-rolled or cold-rolled. Our hot rolled coils have excellent formability and weldability. On the other hand, our cold rolled coils offer superior surface quality, mechanical property, and precise dimensions.

Our hot rolled coils are produced by heating the best steel slabs we can source over the recrystallization temperature, rolled into desired thickness, and coiled at high temperature.

Applications of our hot rolled coils include welded steel structural beams, forming application, storage tanks, boilers, flanges, gas cylinders, and welded pipe.

**Standard &
Specification:**

ASTM A-36
ASTM A-572
JIS G 3101
JIS G 3131

Available Size:

Thickness 2mm - 25mm
Width 900mm - 1524mm
Maximum 25 MT/Coil

Annual Capacity:

720.000 MT/Year
(for coil production only)

Forming (Commercial Or Drawing Quality)

SPECIFICATION	GRADE	Prod. Thick (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES														GENERAL PURPOSE		
				TENSILE TEST								IMPACT TEST								
				TR								LG				TR				
				YS (N/mm ²)		TS (N/mm ²)		EL (%)				+20	0	-20	-40	+20	0		-20	-40
Min		Min	Max	200	80	50	5.65V ₅₀	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG				
ASTM A830	1006	≤ 25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	CARBON STEEL		
	1008	≤ 25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
A1011 CS	Type A	s6	s6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Hot rolled steel sheet and strip, Commercial Steel		
	Type B	s6	s6	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	Type C	s6	s6	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	Type D	s6	s6	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
A1011 DS	Type A	s6	s6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Hot rolled steel sheet and strip, Drawing Steel		
	Type B	s6	s6	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
JIS G 3113:2006	SAPH 400 (41)	2 - 14	≥ 1.6 < 2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Hot rolled steel plate, sheet and strip for automobile structural uses		
			≥ 2 < 2.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
			≥ 2.5 < 3.15	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
			≥ 3.15 < 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
			≥ 4 < 6	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
			≥ 6 < 6.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	SAPH 440 (45)	4 - 14	≥ 6.3 < 8	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
			≥ 8 < 14	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
			≥ 1.6 < 2	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
			≥ 2 < 2.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
JIS G 3131:2010	SPHC	2 - 14	≥ 2.5 < 3.15	-	-	-	-	-	-	-	-	-	-	-	-	-	Hot rolled mild steel plates, sheet and strip			
			≥ 3.15 < 4	-	-	-	-	-	-	-	-	-	-	-	-	-				
			≥ 4 < 6	-	-	-	-	-	-	-	-	-	-	-	-	-				
			≥ 6 < 6.3	-	-	-	-	-	-	-	-	-	-	-	-	-				
			≥ 6.3 < 8	-	-	-	-	-	-	-	-	-	-	-	-	-				
			≥ 8 < 14	-	-	-	-	-	-	-	-	-	-	-	-	-				
	SPHD	2 - 14	≥ 1.2 < 1.6	-	-	-	-	-	-	-	-	-	-	-	-	-		-		
			≥ 1.6 < 2	-	-	-	-	-	-	-	-	-	-	-	-	-		-		
			≥ 2 < 2.5	-	-	-	-	-	-	-	-	-	-	-	-	-		-		
			≥ 2.5 < 3.2	-	-	-	-	-	-	-	-	-	-	-	-	-		-		
JIS G 3132	SPHT - 1	2 - 13	≥ 3.2 < 4	-	-	-	-	-	-	-	-	-	-	-	-	-	Hot rolled carbon steel strip for pipes and tubes			
			≥ 4	-	-	-	-	-	-	-	-	-	-	-	-	-				
			≥ 1.2 < 1.6	-	-	-	-	-	-	-	-	-	-	-	-	-				
			≥ 1.6 < 3	-	-	-	-	-	-	-	-	-	-	-	-	-				
	SPHT - 2	2 - 13	≥ 3 < 6	-	-	-	-	-	-	-	-	-	-	-	-	-		-		
			≥ 6 < 13	-	-	-	-	-	-	-	-	-	-	-	-	-		-		
			≥ 1.2 < 1.6	-	-	-	-	-	-	-	-	-	-	-	-	-		-		
			≥ 1.6 < 3	-	-	-	-	-	-	-	-	-	-	-	-	-		-		
	SPHT - 3	5 - 13	≥ 3 < 6	-	-	-	-	-	-	-	-	-	-	-	-	-		-		
			≥ 6 < 13	-	-	-	-	-	-	-	-	-	-	-	-	-		-		
≥ 1.2 < 1.6			-	-	-	-	-	-	-	-	-	-	-	-	-	-				
≥ 1.6 < 3			-	-	-	-	-	-	-	-	-	-	-	-	-	-				



General & Weldable Structural - Mild Steel

Specification	Grade	Prod. Thick (mm)	Thick. Range (mm)	Mechanical Properties																General Purpose
				Tensile Test								Impact Test								
				TR								LG				TR				
				YS (N/mm ²) Min	TS (N/mm ²) Min Max		EL (%) 200 80		50	5.65v50	+20 AVG	0 AVG	-20 AVG	-40 AVG	+20 AVG	0 AVG	-20 AVG	-40 AVG		
ASTM A-36 / ASME A-36	-	2 - 25	≤ 20	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	-	Specification for Carbon Structural Steel	
			> 20 ≤ 40	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	-		
			> 40 ≤ 65	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	-		
			> 65 ≤ 100	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	-		
			> 100	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	-		
ASTM A-283 / ASME A-283	A	2 - 25	≤ 40	165	310	415	27 ^F	-	30 ^F	-	-	-	-	-	-	-	-	-	Low and Intermediate Tensile Strength Carbon Steel Plates	
			> 40	165	310	415	27 ^F	-	30 ^F	-	-	-	-	-	-	-	-	-		
	B	2 - 25	≤ 40	185	345	450	25 ^F	-	28 ^F	-	-	-	-	-	-	-	-	-		
			> 40	185	345	450	25 ^F	-	28 ^F	-	-	-	-	-	-	-	-	-		
	C	2 - 25	≤ 40	205	380	515	22 ^F	-	25 ^F	-	-	-	-	-	-	-	-	-		
			> 40	205	380	515	22 ^F	-	25 ^F	-	-	-	-	-	-	-	-	-		
	D	2 - 25	≤ 40	230	415	550	20 ^F	-	23 ^F	-	-	-	-	-	-	-	-	-		
			> 40	230	415	550	20 ^F	-	23 ^F	-	-	-	-	-	-	-	-	-		
ASTM A-131	A	2 - 25	≤ 25	235	400	520	21	-	24	-	-	-	-	-	-	-	-	-	Structural Steel for Ships	
			> 25 ≤ 35	235	400	520	21	-	24	-	-	-	-	-	-	-	-	-		
			> 35 ≤ 50	235	400	520	21	-	24	-	-	-	-	-	-	-	-	-		
			> 50 ≤ 70	235	400	520	21	-	24	-	34	-	-	-	-	24	-	-		
			> 70 ≤ 100	235	400	520	21	-	24	-	41	-	-	-	-	27	-	-		
ASTM A-573 / ASME SA-573	58	2 - 25	≤ 13	220	400	490	21 ^F	-	24 ^F	-	-	-	-	-	-	-	-	-	Structural Carbon Steel Plates with Improved Toughness	
			> 13 ≤ 40	220	400	490	21 ^F	-	24 ^F	-	-	-	-	-	-	-	-	-		
	65	2 - 25	≤ 13	240	450	530	20 ^F	-	23 ^F	-	-	-	-	-	-	-	-	-	Structural Carbon Steel Plates with Improved Toughness	
			> 13 ≤ 40	240	450	530	20 ^F	-	23 ^F	-	-	-	-	-	-	-	-	-		
	70	5 - 20	≤ 13	290	485	620	18 ^F	-	21 ^F	-	-	-	-	-	-	-	-	-	Structural Carbon Steel Plates with Improved Toughness	
			> 13 ≤ 40	290	485	620	18 ^F	-	21 ^F	-	-	-	-	-	-	-	-	-		
ASTM A-709 / ASME SA 709	36	2 - 25	≤ 20	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	-	Structural Steels for Bridges	
			> 20 ≤ 40	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	-		
			> 40 ≤ 65	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	-		
			> 65 ≤ 100	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	-		
			> 100	250 ^A	400	550	20 ^B	-	23 ^B	-	-	-	-	-	-	-	-	-		
	50	5 - 20	≤ 40	345	450	-	18 ^B	-	21 ^B	-	-	-	-	-	-	-	-	-	Structural Steel for Bridges	
			> 40	345	450	-	18 ^B	-	21 ^B	-	-	-	-	-	-	-	-	-		
JISG 3101	SS - 400	2 - 25	≤ 5	245.00	400	510	-	-	21	-	-	-	-	-	-	-	-	-	Hot Rolled Steel for General Structure	
			> 5 ≤ 16	245	400	510	17	-	-	-	-	-	-	-	-	-	-	-		
			> 16 ≤ 40	235	400	510	21	-	-	-	-	-	-	-	-	-	-	-		
			> 40 ≤ 100	215 ^A	400	510	-	-	23 ^B	-	-	-	-	-	-	-	-	-		
			> 100	205	400	510	-	-	23 ^B	-	-	-	-	-	-	-	-	-		
	SS - 490	2 - 25	≤ 5	285	490	610	-	-	19	-	-	-	-	-	-	-	-	-		
			> 5 < 16	285	490	610	15	-	-	-	-	-	-	-	-	-	-	-		
			> 16 < 40	275	490	610	19	-	-	-	-	-	-	-	-	-	-	-		
			> 40 ≤ 100	255	490	610	-	-	21 ^B	-	-	-	-	-	-	-	-	-		
			> 100	245	490	610	-	-	21 ^B	-	-	-	-	-	-	-	-	-		
	SS - 540	5 - 15	≤ 5	400	540	-	-	-	16	-	-	-	-	-	-	-	-	-		
			> 5 < 16	400	540	-	13	-	-	-	-	-	-	-	-	-	-	-		
			> 16 < 40	390	540	-	17	-	-	-	-	-	-	-	-	-	-	-		
	JIS G 3106	SM 400 A	2 - 25	≤ 5	245.00	400	510	-	-	23	-	-	-	-	-	-	-	-		-
				> 5 ≤ 16	245.00	400	510	18	-	-	-	-	-	-	-	-	-	-		-
				> 16 ≤ 40	235.00	400	510	22	-	-	-	-	-	-	-	-	-	-		-
> 40 ≤ 75				215.00	400	510	-	-	24	-	-	-	-	-	-	-	-	-		
> 75 ≤ 100				215.00	400	510	-	-	24	-	-	-	-	-	-	-	-	-		
> 100 ≤ 160				205.00	400	510	-	-	24 ^D	-	-	-	-	-	-	-	-	-		
SM 400 B		2 - 25	> 160 ≤ 200	195.00	400	510	-	-	24 ^D	-	-	-	-	-	-	-	-	-		
			≤ 5	245	400	510	-	-	23	-	-	-	-	-	-	-	-	-		
			> 5 ≤ 16	245	400	510	18	-	-	-	-	27 ^F	-	-	-	-	-	-		
			> 16 ≤ 40	235	400	510	22	-	-	-	-	27	-	-	-	-	-	-		
			> 40 ≤ 75	215	400	510	-	-	24	-	-	27	-	-	-	-	-	-		
			> 75 ≤ 100	215	400	510	-	-	24	-	-	27	-	-	-	-	-	-		
SM 400 C		2 - 25	> 100 ≤ 160	205	400	510	-	-	24 ^D	-	-	27	-	-	-	-	-	-		
			> 160 ≤ 200	195	400	510	-	-	24 ^D	-	-	27	-	-	-	-	-	-		
			≤ 5	245	400	510	-	-	23	-	-	-	-	-	-	-	-	-		
EN 10025-2:2004	S 235 JR + AR	2 - 25	< 3	235	360	510	-	19	-	-	-	27	-	-	-	-	-	-	Structural Steel	
			≥ 3 ≤ 16	235	360	510	-	-	-	24	27	-	-	-	-	-	-	-		
			> 16 ≤ 40	225	360	510	-	-	-	24	27	-	-	-	-	-	-	-		
			> 40 ≤ 63	215	360	510	-	-	-	23	27	-	-	-	-	-	-	-		
			> 63 ≤ 80	215	360	510	-	-	-	22	27	-	-	-	-	-	-	-		
	S 235 JO + AR	2 - 25	> 80 ≤ 100	215	360	510	-	-	-	22	27	-	-	-	-	-	-	-		
			> 100 ≤ 150	195	350	500	-	-	-	22	27	-	-	-	-	-	-	-		
			> 150 ≤ 200	185	340	490	-	-	-	21	27	-	-	-	-	-	-	-		
			> 200 ≤ 250	175	340	490	-	-	-	21	27	-	-	-	-	-	-	-		
			> 250 ≤ 300	165	330	480	-	-	-	20	26	-	-	-	-	-	-	-		
	S 235 J2 + N	2 - 25	< 3	235	360	510	-	19	-	-	-	-	27	-	-	-	-	-		
			≥ 3 ≤ 16	235	360	510	-	-	-	24	-	-	-	27	-	-	-	-		
			> 16 ≤ 40	225	360	510	-	-	-	24	-	-	-	27	-	-	-	-		
			> 40 ≤ 63	215	360	510	-	-	-	23	-	-	-	27	-	-	-	-		
			> 63 ≤ 80	215	360	510	-	-	-	22	-	-	-	27	-	-	-	-		

General & Weldable Structural - High Strength Steel

Specification	Grade	Prod. Thick (mm)	Thick. Range (mm)	Mechanical Properties																General Purpose
				Tensile Test									Impact Test							
				YS			TS			EL (%)			IG				TR			
				N/mm ²	Min	Max	N/mm ²	Min	Max	%	80	50	5.65v50	AVG	AVG	AVG	AVG	AVG	AVG	
DIN 17100 (1980)	ST 37.2	2 - 20	≤ 16	235	340	470	24	-	-	-	27	-	-	-	-	-	-	-	-	
			> 16 ≤ 25	225	340	470	24	-	-	-	-	-	-	-	-	-	-	-		
			> 25 < 40	225	340	470	24	-	-	-	-	-	-	-	-	-	-	-		
			> 40 ≤ 63	215	340	470	23	-	-	-	-	-	-	-	-	-	-	-		
			> 63 ≤ 80	205	340	470	22	-	-	-	-	-	-	-	-	-	-	-		
			> 80 ≤ 100	195	340	470	22	-	-	-	-	-	-	-	-	-	-	-		
	ST 44.2	2 - 20	≤ 16	275	410	540	20	-	-	-	27	-	-	-	-	-	-	-	-	
			> 16 < 25	265	410	540	20	-	-	-	27	-	-	-	-	-	-	-		
			> 25 < 40	265	410	540	20	-	-	-	27	-	-	-	-	-	-	-		
			> 40 < 63	255	410	540	19	-	-	-	27	-	-	-	-	-	-	-		
			> 63 < 80	245	410	540	18	-	-	-	-	-	-	-	-	-	-	-		
			> 80 < 100	235	410	540	18	-	-	-	-	-	-	-	-	-	-	-		
AS/NZS 3678	200	2 - 20	≤ 8	200	300	-	-	-	-	24	-	-	-	-	-	-	-	-	-	
			> 8 ≤ 12	200	300	-	-	-	-	24	-	-	-	-	-	-	-	-	-	
			> 12 ≤ 20	no specified limit	300	-	-	-	-	24	-	-	-	-	-	-	-	-	-	
			> 20 ≤ 32	no specified limit	300	-	-	-	-	24	-	-	-	-	-	-	-	-	-	
			> 32 ≤ 50	no specified limit	300	-	-	-	-	24	-	-	-	-	-	-	-	-	-	
			> 50 ≤ 80	no specified limit	300	-	-	-	-	24	-	-	-	-	-	-	-	-	-	
	250	2 - 20	> 80 ≤ 150	no specified limit	300	-	-	-	-	24	-	-	-	-	-	-	-	-	-	
			≤ 8	280	410	-	-	-	-	22	-	-	-	-	-	-	-	-	-	
			> 8 ≤ 12	260	410	-	-	-	-	22	-	-	-	-	-	-	-	-	-	
			> 12 ≤ 20	250	410	-	-	-	-	22	-	-	-	-	-	-	-	-	-	
			> 20 ≤ 32	250	410	-	-	-	-	22	-	-	-	-	-	-	-	-	-	
			> 32 ≤ 50	250	410	-	-	-	-	22	-	-	-	-	-	-	-	-	-	
300	2 - 20	> 50 ≤ 80	240	410	-	-	-	-	22	-	-	-	-	-	-	-	-	-		
		> 80 ≤ 150	230	410	-	-	-	-	22	-	-	-	-	-	-	-	-	-		
		≤ 8	320	430	-	-	-	-	21	-	-	-	-	-	-	-	-	-		
		> 8 ≤ 12	310	430	-	-	-	-	21	-	-	-	-	-	-	-	-	-		
		> 12 ≤ 20	300	430	-	-	-	-	21	-	-	-	-	-	-	-	-	-		
		> 20 ≤ 32	280	430	-	-	-	-	21	-	-	-	-	-	-	-	-	-		
AS 1594	HA 250	2-20	≤ 3	250	350	-	16	20	22	-	-	-	-	-	-	-	-	-		
			> 3 ≤ 5	250	350	-	17	24	26	-	-	-	-	-	-	-	-	-		
	HU 250	2-20	≤ 3	250	350	-	16	20	22	-	-	-	-	-	-	-	-	-		
			> 3 ≤ 5	250	350	-	17	24	26	-	-	-	-	-	-	-	-	-		
	HA 300	4-16	≤ 3	300	400	-	15	18	20	-	-	-	-	-	-	-	-	-		
			> 3 ≤ 5	300	400	-	16	22	24	-	-	-	-	-	-	-	-	-		
	HU 300	4-16	≤ 3	300	400	-	15	18	20	-	-	-	-	-	-	-	-	-		
			> 3 ≤ 5	300	400	-	16	22	24	-	-	-	-	-	-	-	-	-		
	BS 4360	40 A	2 - 20	≤ 16	235	340	500	22 ^a	25 ^b	-	25	-	-	-	-	-	-	-	-	
				> 16 ≤ 40	225	340	500	22	25	-	25	-	-	-	-	-	-	-	-	
				> 40 ≤ 63	215	340	500	22	25	-	25	-	-	-	-	-	-	-	-	
				> 63 ≤ 100	205	340	500	22	25	-	25	-	-	-	-	-	-	-	-	
> 100 ≤ 150				185	340	500	22	25	-	25	-	-	-	-	-	-	-	-		
40 B		2 - 20	≤ 16	235	340	500	22 ^a	25 ^b	-	25	27	-	-	-	-	-	-	-		
			> 16 ≤ 40	225	340	500	22	25	-	25	27	-	-	-	-	-	-	-		
			> 40 ≤ 63	215	340	500	22	25	-	25	27	-	-	-	-	-	-	-		
			> 63 ≤ 100	205	340	500	22	25	-	25	27	-	-	-	-	-	-	-		
			> 100 ≤ 150	185	340	500	22	25	-	25	27	-	-	-	-	-	-	-		
40 C		2 - 20	≤ 16	235	340	500	22 ^a	25 ^b	-	25	-	27	-	-	-	-	-	-		
			> 16 ≤ 40	225 ^c	340	500	22	25	-	25	-	27	-	-	-	-	-	-		
			> 40 ≤ 63	215	340	500	22	25	-	25	-	27	-	-	-	-	-	-		
			> 63 ≤ 100	210	340	500	22	25	-	25	-	27	-	-	-	-	-	-		
			> 100 ≤ 150	185	340	500	22	25	-	25	-	27	-	-	-	-	-	-		
40 D		5 - 20	≤ 16	235	340	500	22 ^a	25 ^b	-	25	-	-	27	-	-	-	-	-		
			> 16 ≤ 40	225	340	500	22	25	-	25	-	-	27	-	-	-	-	-		
			> 40 ≤ 63	215	340	500	22	25	-	25	-	-	27	-	-	-	-	-		
			> 63 ≤ 100	215	340	500	22	25	-	25	-	-	27	-	-	-	-	-		
			> 100 ≤ 150	205	340	500	22	25	-	25	-	-	27	-	-	-	-	-		
43 A	2 - 20	≤ 16	275	430	580	20 ^a	23 ^b	-	22	-	-	-	-	-	-	-	-			
		> 16 ≤ 40	265	430	580	20	23	-	22	-	-	-	-	-	-	-	-			
		> 40 ≤ 63	255	430	580	20	23	-	22	-	-	-	-	-	-	-	-			
		> 63 ≤ 100	245	430	580	20	23	-	22	-	-	-	-	-	-	-	-			
		> 100 ≤ 150	225	410	580	20	23	-	22	-	-	-	-	-	-	-	-			
43 B	2 - 20	≤ 16	275	430	580	20 ^a	23 ^b	-	22	27	-	-	-	-	-	-	-			
		> 16 ≤ 40	265	430	580	20	23	-	22	27	-	-	-	-	-	-	-			
		> 40 ≤ 63	255	430	580	20	23	-	22	27	-	-	-	-	-	-	-			
		> 63 ≤ 100	245	430	580	20	23	-	22	27	-	-	-	-	-	-	-			
		> 100 ≤ 150	225	410	580	20	23	-	22	27	-	-	-	-	-	-	-			
43 C	2 - 20	≤ 16	275	430	580	20 ^a	23 ^b	-	22	-	27	-	-	-	-	-	-			
		> 16 ≤ 40	265	430	580	20	23	-	22	-	27	-	-	-	-	-	-			
		> 40 ≤ 63	255	430	580	20	23	-	22	-	27	-	-	-	-	-	-			
		> 63 ≤ 100	245	430	580	20	23	-	22	-	27	-	-	-	-	-	-			
		> 100 ≤ 150	225	410	580	20	23	-	22	-	27	-	-	-	-	-	-			
43 D	5 - 20	≤ 16	275	430	580	20 ^a	23 ^b	-	22	-	-	27	-	-	-	-	-			
		> 16 ≤ 40	265	430	580	20	23	-	22	-	-	27	-	-	-	-	-			
		> 40 ≤ 63	255	430	580	20	23	-	22	-	-	27	-	-	-	-	-			
		> 63 ≤ 100	245	430	580	20	23	-	22	-	-	27	-	-	-	-	-			

Line Pipe Mild Steel

SPECIFICATION	GRADE	Prod. Thick (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES																GENERAL PURPOSE		
				TENSILE TEST										IMPACT TEST								
				TR										LG				TR				
				YS (N/mm ²)	TS (N/mm ²)		EL (%)				+20	0	-20	-40	+20	0	-20	-40				
				Min	Min	Max	200	80	50	5.65Vs0	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG	AVG			
API 5L PSL 1	B8	- 25	≤ 25	245 - 4504	15	760-	----					40	----									
	X 42	8 - 25	≤ 25	290 - 4954	15	760-	----					40	----									
API 5L PSL 2	BM	8 - 25	≤ 25	245 - 4504	15	760-	----					40	----									
	X 42M8	- 25	≤ 25	290 - 4954	15	760-	----					40	----									

Line Pipe High Strength Steel

SPECIFICATION	GRADE	Prod. Thick (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES														GENERAL PURPOSE	
				TENSILE TEST							IMPACT TEST								
				TR							LG				TR				
				YS (N/mm ²) Min	TS (N/mm ²) Min Max		EL (%) 200 80 50			5.65Vs0	+20 AVG	0 AVG	-20 AVG	-40 AVG	+20 AVG	0 AVG	-20 AVG		-40 AVG
API 5L PSL 1 Welded Pipe	X 46	8 - 20	≤ 25	320 - 525	435	760	-	-	-	-	-	40	-	-	-	-	-	-	LINE PIPE STEEL
	X 52	8 - 20	≤ 25	360 - 530	460	760	-	-	-	-	-	40	-	-	-	-	-	-	
	X 56	8 - 20	≤ 25	390 - 545	490	760	-	-	-	-	-	40	-	-	-	-	-	-	
	X 60	8 - 16	≤ 25	415 - 565	520	760	-	-	-	-	-	40	-	-	-	-	-	-	
	X 65	8 - 16	≤ 25	450 - 600	535	760	-	-	-	-	-	40	-	-	-	-	-	-	
	X 70	6	≤ 25	485 - 635	570	760	-	-	-	-	-	40	-	-	-	-	-	-	
API 5L PSL 2 Welded Pipe	X 46M	8 - 20	≤ 25	320 - 525	435	760	-	-	-	-	-	40	-	-	-	-	-	-	LINE PIPE STEEL
	X 52M	8 - 20	≤ 25	360 - 530	460	760	-	-	-	-	-	40	-	-	-	-	-	-	
	X 56M	8 - 20	≤ 25	390 - 545	490	760	-	-	-	-	-	40	-	-	-	-	-	-	
	X 60M	8 - 16	≤ 25	415 - 565	520	760	-	-	-	-	-	40	-	-	-	-	-	-	
	X 65M	8 - 16	≤ 25	450 - 600	535	760	-	-	-	-	-	40	-	-	-	-	-	-	
	X 70M	6	≤ 25	485 - 635	570	760	-	-	-	-	-	40	-	-	-	-	-	-	
API 5L PSL 2 Offshore Service	X 42MO	8 - 20	≤ 25	290 - 495	415	760	-	-	-	-	-	40	-	-	-	-	-	-	LINE PIPE STEEL FOR OFFSHORE SERVICES
	X 46MO	8 - 20	≤ 25	320 - 520	435	760	-	-	-	-	-	40	-	-	-	-	-	-	
	X 52MO	8 - 20	≤ 25	360 - 525	460	760	-	-	-	-	-	40	-	-	-	-	-	-	
	X 56MO	8 - 20	≤ 25	390 - 540	490	760	-	-	-	-	-	40	-	-	-	-	-	-	

Gas Cylinder Steel

SPECIFICATION	GRADE	Prod. Thick (mm)	Thick. Range (mm)	MECHANICAL PROPERTIES														GENERAL PURPOSE	
				TENSILE TEST							IMPACT TEST								
				TR							LG				TR				
				YS (N/mm ²)	TS (N/mm ²)		EL (%)		50	5.65S ₀	+20	0	-20	-40	+20	0	-20		-40
				Min	Min	Max	200	80	50	5.65S ₀	AVG	AVG	AVG	AVG	AVG	AVG	AVG		AVG
JIS G 3116	SG 255	≥1.6 ≤6.0	2554	00	—	—	200	80	50	5.65S ₀	—	—	—	—	—	—	—	—	GAS CYLINDER STEEL
	SG 295	≥1.6 ≤6.0	2954	40	—	—	—	—	—	—	—	—	—	—	—	—	—		
	SG 325	≥1.6 ≤6.0	3254	90	—	—	—	—	—	—	—	—	—	—	—	—	—		







Coil Plate

We produce Steel Coil Plate with our proprietary technology to guarantee the best quality product results. Our Coil Plate comes with a variety of standards and sizes that can be tailored to your needs.

GRP uses equalizing process to produce highest standard of coil plate, this industry leading standard produces a quality steel plate that is consistently flat.

Standard & Specification:

A36, SS400, A283,
EN 10025 Gr.235 JR,
A572Gr50.

Available Size:

Thickness 2.0mm – 12mm
Width 900 – 1524 mm

Annual Capacity:

360.000 MT/Year

High Strength Steel YS>300 Mpa

SPECIFICATION	GRADE	Prod. Thick (mm)	MECHANICAL PROPERTIES				
			Tensile Testing			Impact Testing (CVN)	
			YS (MPa)	TS (MPa)	EL (%)	LG	TR
ASTM A 131 / ASME SA 131	AH36	6 - 10	355	490 - 620	19	0°C (27 Joule)	0°C (24 Joule)
	DH36	6 - 10	355	490 - 620	19	-20°C (27 Joule)	-20°C (24 Joule)
	EH36	6 - 10	355	490 - 620	19	-40°C (27 Joule)	-40°C (24 Joule)
	AH40	6 - 10	390	510 - 650	19	0°C (39 Joule)	0°C (26 Joule)
	DH40	6 - 10	390	510 - 650	19	-20°C (39 Joule)	-20°C (26 Joule)
	EH40	6 - 10	390	510 - 650	19	-40°C (39 Joule)	-40°C (26 Joule)
ASTM A 572 / ASME SA 572	50	6 - 10	345	450	18M	-	-
	55	6 - 10	380	485	17M	-	-
	60	6 - 10	415	520	16M	-	-
ASTM A 573 / ASME SA 573	70	6 - 10	290	485 - 620	18R	-	-
JIS G 3101	SS 490	6 - 10	285	490 - 610	15	-	-
	SS 540	6 - 10	400	540	13	-	-
JIS G 3106	SM 490 A	6 - 10	325	490 - 610	17	-	-
	SM 490 B	6 - 10	325	490 - 610	17	0°C (27 Joule)	-
	SM 490 C	6 - 10	325	490 - 610	17	0°C (47 Joule)	-
	SM 490 YA	6 - 10	365	490 - 610	15	-	-
	SM 490 YB	6 - 10	365	490 - 610	15	0°C (27 Joule)	-
	SM 520 B	6 - 10	365	520 - 640	15	0°C (27 Joule)	-
	SM 520 C	6 - 10	365	520 - 640	15	0°C (47 Joule)	-
BS 4360	50 B	6 - 10	355	490 - 640	18C	+20°C (27 Joule)	-
	50 C	6 - 10	355	490 - 640	18C	0°C (27 Joule)	-
	50 D	6 - 10	355	490 - 640	18C	-20°C (47 Joule)	-
	50 DD	6 - 10	355	490 - 640	18C	-30°C (47 Joule)	-
EN 10025-2 / MS EN 10025-2	S 355 JR	6 - 10	355	470 - 630	20	+20°C (27 Joule)	-
	S 355 JO	6 - 10	355	470 - 630	20	0°C (27 Joule)	-
	S 355 J2	6 - 10	355	470 - 630	20	-20°C (47 Joule)	-
CSA G40.21 (1998)	350 W (50 W)	6 - 10	350	450 - 650	17	-	-
	400 W (60 W)	6 - 10	400	520 - 690	13	-	-
	1E-1863	6-100	345 - 500	450	16	-29°C (11 Joule)	-

PRESSURE VESSEL STEEL

SPECIFICATION	GRADE	Prod. Thick (mm)	MECHANICAL		
			Tensile Testing		
			YS (MPa)	TS (MPa)	EL (%)
ASTM A 516 / ASME SA 516	55	6 - 10	205	380 - 515	23
	60	6 - 10	220	415 - 550	21
	65	6 - 10	240	450 - 585	19
	70	6 - 10	260	485 - 620	17
ASTM A 572 / ASME SA 527	B	4 - 12	185	345 - 485	25
	C	4 - 12	205	380 - 515	23
JIS G 3101	SG 255	2 - 4	255	400	28
	SG 295	2 - 3	295	440	26

WEATHER RESISTANT STEEL / Atmospheric Corrosion Resistance

SPECIFICATION	GRADE	Prod. Thick (mm)	MECHANICAL		
			Tensile Testing		
			YS (MPa)	TS (MPa)	EL (%)
ASTM A 242 / ASME SA 242	-	6 - 10	345	480	18

SHIP-BUILDING STEEL


SPECIFICATION	GRADE	Prod. Thick (mm)	MECHANICAL PROPERTIES				
			Tensile Testing			Impact Testing (CVN)	
			YS (MPa)	TS (MPa)	EL (%)	LG	TR
Certified by LR, ABS, BV, BKI, & DNV GL	AH36	6 - 10	355	490 - 620	19	0°C (27 Joule)	0°C (24 Joule)
	DH36	6 - 10	355	490 - 620	19	-20°C (27 Joule)	-20°C (24 Joule)
	EH36	6 - 10	355	490 - 620	19	-40°C (27 Joule)	-40°C (24 Joule)
	AH40	6 - 10	390	510 - 650	19	0°C (39 Joule)	0°C (26 Joule)
	DH40	6 - 10	390	510 - 650	19	-20°C (39 Joule)	-20°C (26 Joule)
	EH40	6 - 10	390	510 - 650	19	-40°C (39 Joule)	-40°C (26 Joule)
	A	5-12	235	400 - 520	21	-	-
	B	5-12	235	400 - 520	21	0°C (27 Joule)	0°C (20 Joule)
	D	5-12	235	400 - 520	21	-20°C (27 Joule)	-20°C (20 Joule)
	E	5-12	235	400 - 520	21	-40°C (27 Joule)	-40°C (20 Joule)

AVAILABLE SIZE

	Maximum Length (mm)			
	Thickness Range (mm)	Width Range (mm)		
		900 - 1070	1070 -1219	1219 - 1524
MILD STEEL (YS < 300 MPa)	2 - 3	4000	4000	-
	3 - 4.5	6000	6000	-
	4.5 - 6	12000	12000	12000
	6 - 8	12000	12000	12000
	8 - 9	12000	12000	12000
	9 - 12	12000	12000	12000
*Minimum Length 2000 mm				
	Maximum Length (mm)			
	Thickness Range (mm)	Width Range (mm)		
		900 - 1070	1070 -1219	1219 - 1524
HIGH STRENGTH STEEL (YS > 300 MPa)	6 - 8	12000	12000	12000
	8 - 9	12000	12000	12000
	9 - 10	12000	12000	12000
*Minimum Length 2000 mm				





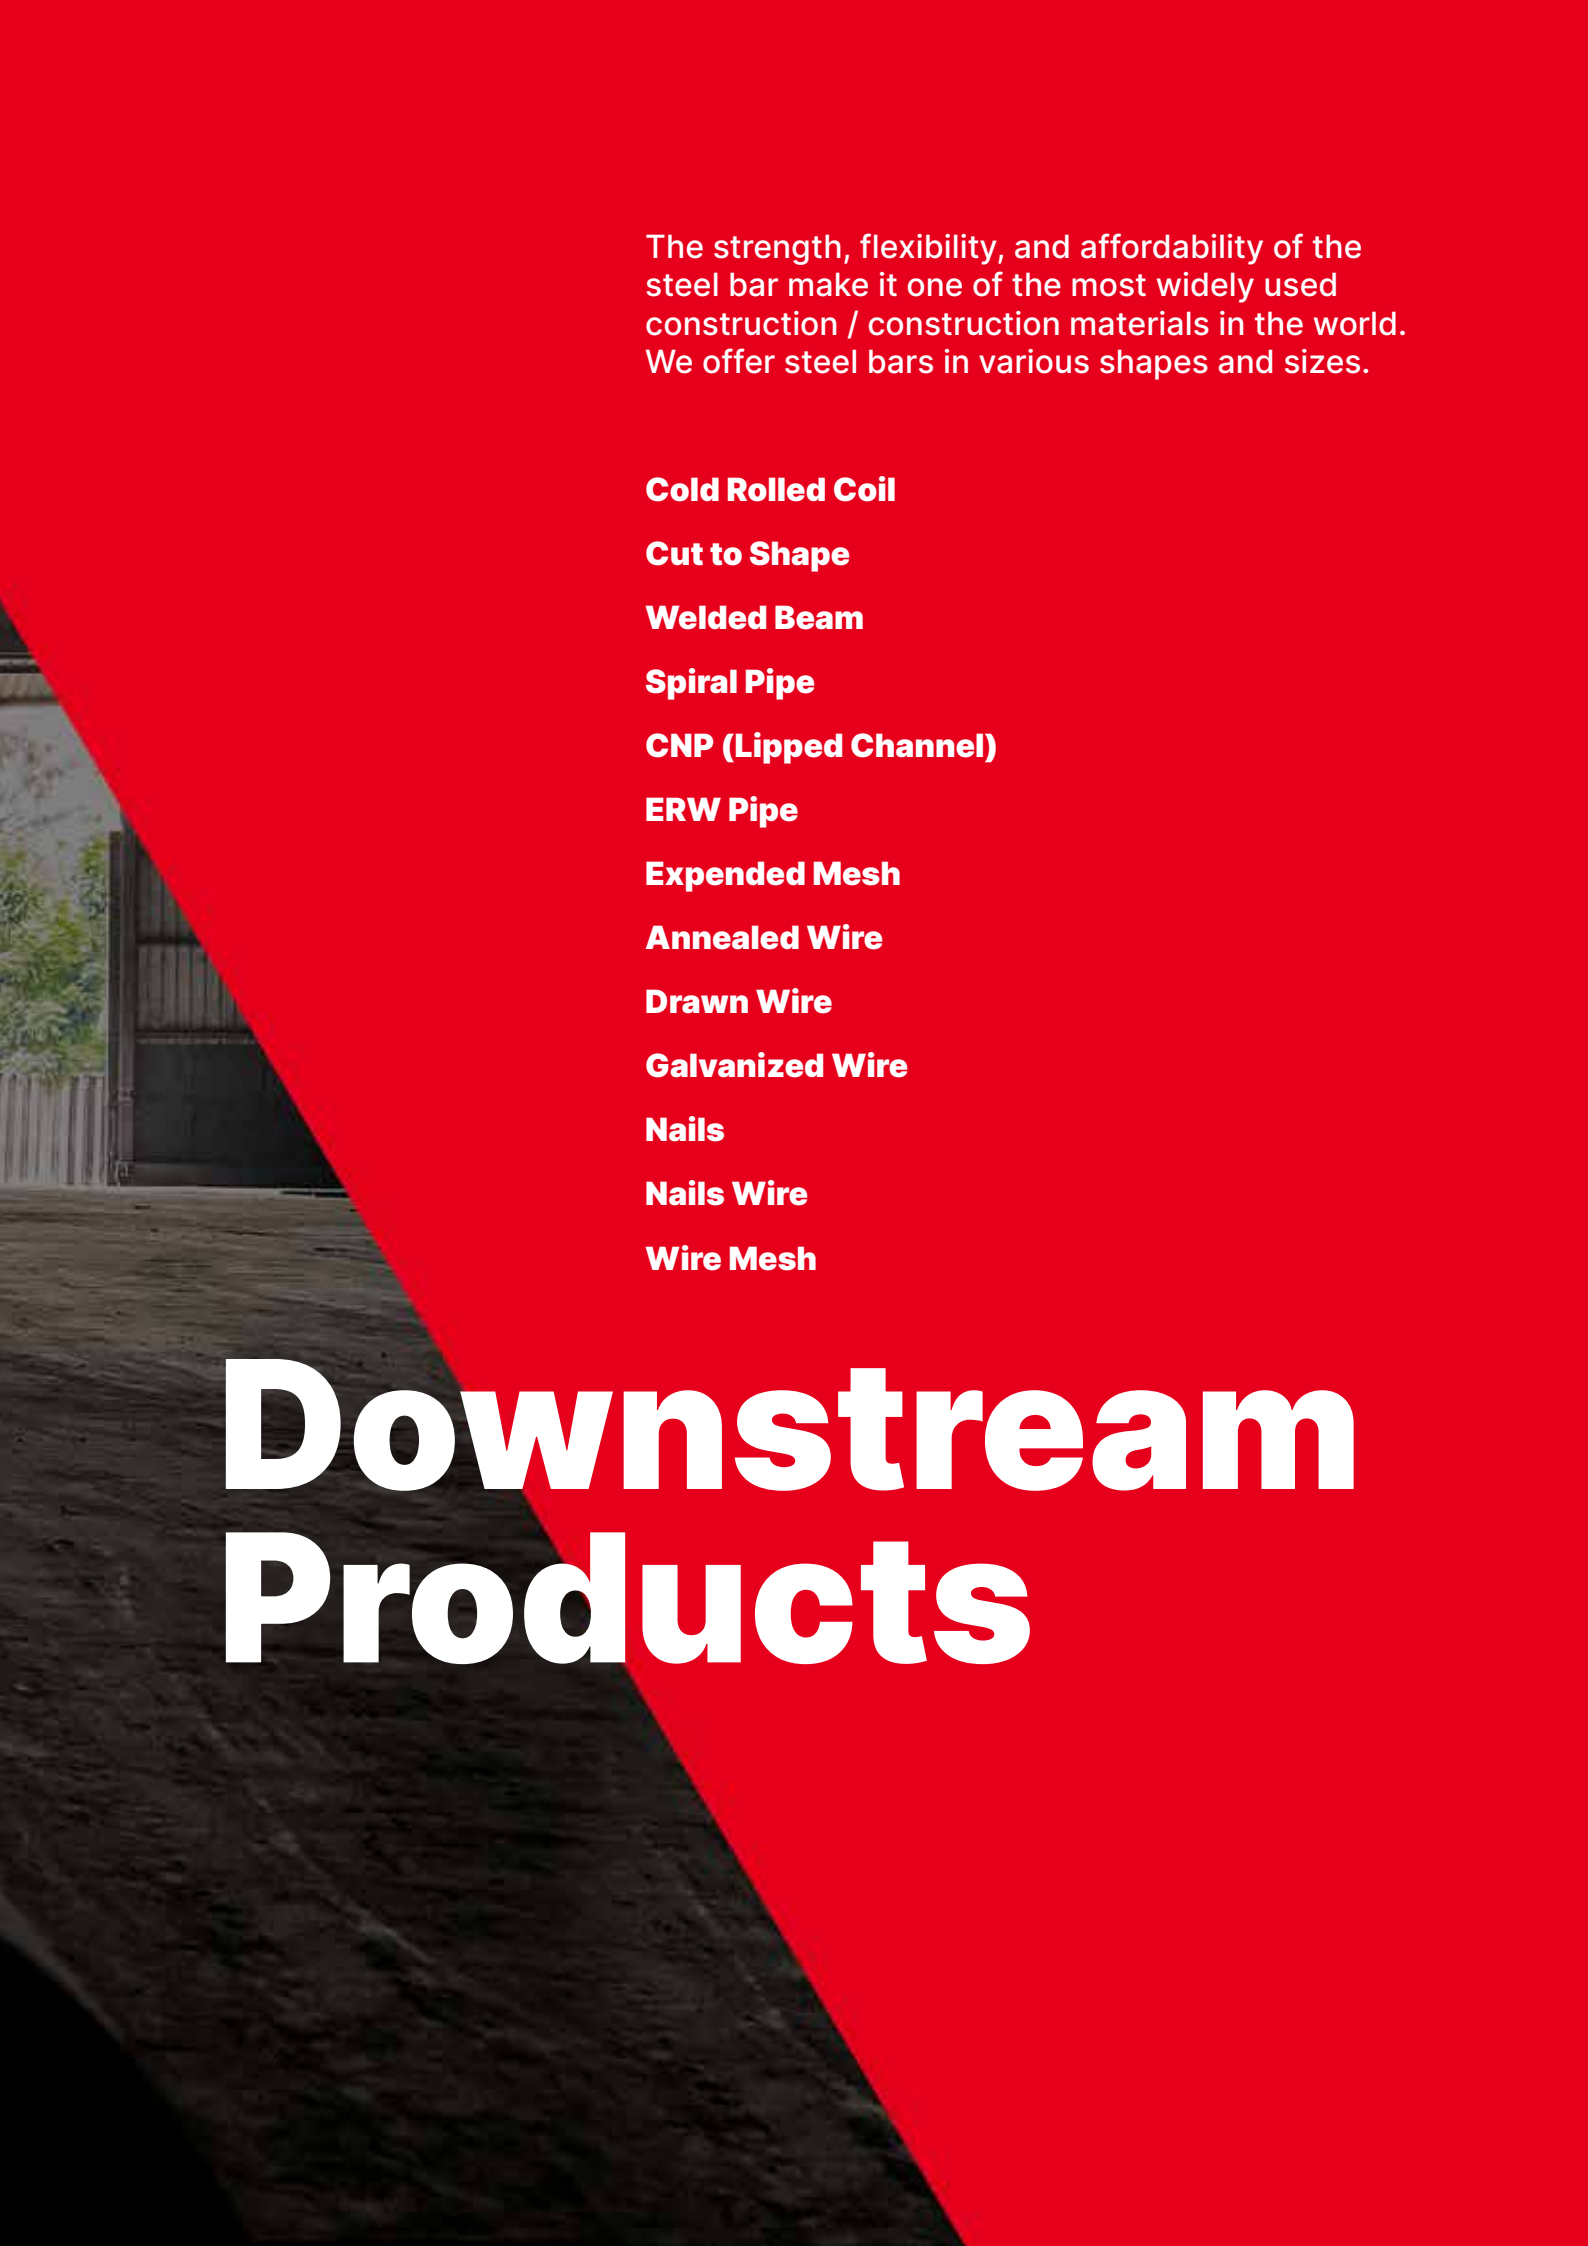

The strength, flexibility, and affordability of the steel bar make it one of the most widely used construction / construction materials in the world. We offer steel bars in various shapes and sizes.

Cold Rolled Coil

Cut to Shape

Welded Beam

Spiral Pipe

CNP (Lipped Channel)

ERW Pipe

Expanded Mesh

Annealed Wire

Drawn Wire

Galvanized Wire

Nails

Nails Wire

Wire Mesh

Downstream Products



Cold Rolled Coil

GRP also produces our coil products in cold rolled form to cater to specific materials requirement for that unique product application.

This flat steel product rolled into thinner sizes while it is in normal room temperature to the exact thickness requirement and rolled into coils. The resulting of cold rolled coils is that they have a better surface quality, thinner profiles, and excellent finishes, and can be made into different type of products by means of cold forming.

Standard & Specification:

JIS G 3141 spec 1B
JIS G 3141 spec SB
JIS G 3141 spec SD

Available Size:

Thickness 0.2mm – 2.5mm
Width 700mm – 1270mm
Maximum 27 MT/Coil

Annual Capacity:

500.000 MT/Year



Cut To Shape

With multi head oxy flame cutting machines we can cut thick mild steel material up to 300 mm thick. Our large cutting facility 3500 mm wide X 25000 mm long , 6 ESAB Make CNC Oxy cutting machine coupled with multi head flame cutting facility, make flame cutting accurate and ideal for high production.

We have eight multi head oxy flame flat bar cutting facility of capacity 3000 mm wide and 20,000 long and one plasma cutting machine with the cutting capacity of 20 mm thick x 6000 mm long. In addition to oxy cutting we have two shearing machines of capacity 13 mm thick X 12000 mm long.

Standard & Specification:

Thickness and flatness tolerance in accordance with standard. Profiling tolerance +/- 2 mm to +/- 6 mm depending on thickness and size (length & Width).

Size Chart:

Cutting Thickness 3 mm to 300 mm, full range of mild and carbon steels readily available or met to order supply by our plate mill.

Width 3000 mm, Length 25000 mm

Annual Capacity:

Average 12.000 Ton per Year (dependent on size of CTS and specification of material).



Welded Beam

Functioned similar to the mass produced H and I beam, the welded beams are made by joining together different plates to form a single beam.

Welded beam serves as the alternatives for construction projects that require beams that are not able to be produced in hot rolled form. Our welded beam products are machine welded and are closely supervised by our qualified technician and engineers to ensure the quality of the welding and the final products.

At GRP, we produce our welded beam in compliance with the JIS G 3192 standard sizes and dimensions. We also provide the services to tailor-made the beam sizes and dimension to suit the unique and challenging construction project as required by our customers.

Standard & Specification:

Supply various specification / international standard like JIS , ASTM , EN , BS , AS , ABS, AS/NZS 3679.2 etc.

Annual Capacity:

60.000 MT/Year

Available Size:

As per customer Requirement

Flange Width Range: 200 - 1,000 mm

Web Height Range: 200 - 3,000 mm

Thickness Flange Range: 8 - 100 mm

Maximum Length: 25,000 mm

According JIS G 3192

Welded Beam Standard Specification

Standard Sectional Dimension				Section Area A	Unit Weight	Unit Weight	Informative Reference					
							Geometrical Moment of Inertia		Radius of Gyration of Area		Modulus of Section	
H x B	t1	t2	r				Ix cm ⁴	Iy cm ⁴	ix cm	iy cm	Zx cm ³	Zy cm ³
mm	mm	mm	mm	mm ²	kg/m	kg/12m						
588 x 300	12	20	28	192.5	151.00	1812	118,000	9,020	24.80	6.85	4,020.00	601.00
700 x 300	13	24	28	235.5	181.00	2171	201,000	10,800	29.30	6.78	5,760.00	722.00
800 x 300	14	26	28	267.4	207.00	2474	292,000	11,700	33.00	6.62	7,290.00	782.00
900 x 300	16	28	28	309.8	240.00	2878	411,000	12,600	36.00	6.39	9,140.00	843.00
350 x 350	12	19	20	173.9	137	1644	40,300	13,600	15.2	8.84	2,300.00	776.00
400 x 400	13	21	22	218.7	172	-	66,600	22,400	17.5	10.1	3,330.00	1,120.00

NOTE : Non standard sizes are available upon request and subject to minimum quantity.

Structural steel, welded I-Sections to AS/NZS 3679.2

Structural Section	Range	300	300L15	400	400L15	350	350L15
		✓	✓	✓	✓	✓	✓
Beams	700WB to 1200WB with web thicknesses 10 to 16mm	✓	✓	✓	✓	✓	✓
Columns	350WC to 500WC with web thickness 16 to 40mm	✓	✓	✓	✓	✓	✓

Cert. No. 171203 T 1011

1	2	3	4	5	6
Designation	Depth of section (d) mm	Flange		Web Thickness (t _w) mm	Depth between flanges (d ₁) mm
		Width (b) mm	Thickness (t _f) mm		
1200 WB	455	1200	500	40.0	1120
	423	1192	500	36.0	1120
	392	1184	500	32.0	1120
	342	1184	400	32.0	1120
	317	1176	400	28.0	1120
	278	1170	350	25.0	1120
	249	1170	275	25.0	1120
1000 WB	322	1024	400	32.0	960
	296	1016	400	28.0	960
	258	1010	350	25.0	960
	215	1000	300	20.0	960
900 WB	282	924	400	32.0	860
	257	916	400	28.0	860
	218	910	350	25.0	860
	175	900	300	20.0	860
800 WB	192	816	300	28.0	760
	168	810	275	25.0	760
	146	800	275	20.0	760
	122	792	250	16.0	760
700 WB	172	716	275	28.0	660
	150	710	250	25.0	660
	130	700	250	20.0	660
	115	692	250	16.0	660

1	2	3	4	5	6
Designation	Depth of section (d) mm	Flange		Web Thickness (t _w) mm	Depth between flanges (d ₁) mm
		Width (b) mm	Thickness (t _f) mm		
500 WC	440	480	500	40.0	400
	414	480	500	40.0	400
	383	472	500	36.0	400
	340	514	500	32.0	450
	290	506	500	28.0	450
	267	500	500	25.0	450
	228	490	500	20.0	450
400 WC	362	430	400	40.0	350
	328	430	400	40.0	350
	303	422	400	36.0	350
	270	414	400	32.0	350
	212	400	400	25.0	350
	181	390	400	20.0	350
	144	382	400	16.0	350
350 WC	280	355	350	40.0	275
	258	347	350	36.0	275
	230	339	350	32.0	275
	197	331	350	28.0	275





Spiral Pipe

The versatile spiral-welded steel pipes are popular among different applications in the oil & gas industries, building construction and water / liquid distribution system. This type of pipe product is often used for foundation piling, liquid flow distribution system and ports / jetty construction.

Available Size:

OD (Outside Diameter)
165mm–3200mm
Length 6000–45000 mm

Annual Capacity:

89.400 MT/Year

Standard & Specifications:

GRP produces our pipe with the automatic double-sided Submerged Arc Welding (S.A.W) technology to ensure the great consistency of our welding and the quality of our final product.

For a specific work project, we are able produce the spiral-welded steel pipes to suit different thickness and the diameter of up to 126" OD. In addition, we are able to provide additional coating services with different type of material to the pipe depending on the project's requirement.

Standard	Main Application	Grade
API 5L	High strength oil & gas pipelines, slurry lines, refinery piping, etc.	A 25 CI I EW/CW
		A25 CI II EW/CW
		A NE/CE
		B NE/CE
		X 42 NE/CE
		X 46 NE
		CE
		X 52 NE
		CE
		X 56 NE/CE
	notes: EW : electric welded CW : continuous welded NE : non expanded CE : cold expanded	X 60 NE/CE
		X 65 NE/CE
		X 70 NE/CE
		X 80 NE/CE

Standard	Main Application	Grade
ASTM A 252	Piping	1
		2
		3
AWWA C 200	Water & sewage systems. Optionally pipes maybe supplied according to ASTM A 53, A 135	ASTM A 36
		ASTM A 283
		C
		D
		30
		33
		36
		40
		45
		50
		ASTM A 572
		42
		50
		60

Standard	Main Application	Grade
DIN 1626	General Application	USt 37 - 1
		RSt 37 - 1
		USt 37 - 2
		RSt 37 - 2
		St 37 - 3
		USt 42 - 1
		RSt 42 - 1
		USt 42 - 2
BS 3601	General Application	RSt 42 - 2
		St 52 - 3
		320
		360
		430
		

Outside Diameter		Thickness																	
inch	mm	6	8	9	10	11	12	12.7	13	14	15	16	17	18	19	20	21	22	
8	203.2	29.18	38.51	43.10	47.64	52.14	56.58	59.66	60.97	65.32	69.62	73.86	78.06	82.21	86.31	90.35	-	-	
10	254	36.69	48.53	54.38	60.17	65.92	71.61	75.57	77.26	82.86	88.41	93.91	99.36	104.21	110.11	115.41	-	-	
12	304.8	44.21	58.55	65.65	72.70	79.70	86.61	91.48	93.55	100.40	107.2	113.95	120.65	127.30	133.91	140.46	-	-	
14	355.6	51.73	68.57	76.92	85.22	93.48	101.68	107.39	109.83	117.93	125.99	133.99	141.95	149.85	157.71	165.52	-	-	
16	406.4	59.24	78.60	88.20	97.75	107.26	116.71	123.30	126.12	135.47	144.78	154.04	163.24	172.40	181.51	190.57	-	-	
18	457.2	66.76	88.62	99.47	110.28	121.04	131.74	139.21	142.40	153.01	163.57	174.08	184.54	194.95	205.31	215.63	-	-	
20	508	74.28	98.64	110.75	122.81	134.82	146.78	155.12	158.69	170.55	182.36	194.12	205.84	217.50	229.12	240.68	-	-	
22	558.8	81.79	108.66	122.02	135.33	148.60	161.81	171.03	174.97	188.09	201.15	214.17	227.13	240.05	252.92	265.74	-	-	
24	609.6	89.31	118.68	133.30	147.86	162.38	176.84	186.94	191.26	205.62	219.94	234.21	248.43	262.60	276.72	290.79	-	-	
26	660.4	96.83	128.71	144.57	160.39	176.16	191.87	202.85	207.54	223.16	238.73	254.25	269.73	285.15	300.52	315.85	-	-	
28	711.2	104.34	138.73	155.85	172.92	189.94	206.91	218.76	223.83	240.70	257.52	274.30	291.02	307.70	324.32	340.90	-	-	
30	762	111.86	148.75	167.12	185.44	203.72	221.94	234.67	240.11	258.24	276.32	294.34	312.32	330.25	348.13	365.95	-	-	
32	812.8	119.37	158.77	178.40	197.97	217.50	236.97	250.58	256.40	275.78	295.11	314.39	333.62	352.80	371.93	391.01	-	-	
34	863.6	126.89	168.79	189.67	210.50	231.28	252.01	266.49	272.69	293.32	313.90	334.43	354.91	375.34	395.73	416.06	-	-	
36	914.4	134.41	178.81	200.94	223.03	245.06	267.04	282.40	288.97	310.85	332.69	354.44	376.21	397.89	419.53	441.12	-	-	
38	965.2	141.92	188.84	212.22	235.55	258.84	282.07	298.31	305.26	328.38	351.48	374.52	397.50	420.44	443.33	466.17	-	-	

Weight/M (Kg/M) = (OD-T)×T×0.2466 Not Available Size

OD = Outside Diameter (mm)

T = Thickness (mm)

Outside Diameter		Thickness																	
inch	mm	6	8	9	10	11	12	12.7	13	14	15	16	17	18	19	20	21	22	
40	1011.6	149.44	198.86	223.49	248.08	272.62	297.10	314.22	321.54	345.93	370.27	394.56	418.80	442.99	467.13	491.23	-	-	
42	1066.8	156.96	208.88	234.77	260.61	286.40	312.15	330.13	337.83	363.47	389.06	414.60	440.80	465.54	490.94	516.28	-	-	
44	1117.6	164.47	218.90	246.04	273.13	300.18	327.17	346.03	354.11	381.01	407.85	434.65	461.39	488.09	514.74	541.34	-	-	
46	1168.4	171.99	228.92	257.32	285.66	313.96	342.2	361.94	370.40	398.55	426.64	454.69	482.69	510.64	538.54	566.39	-	-	
48	1219.2	179.51	238.95	268.59	298.19	327.74	357.23	377.85	386.68	416.08	445.43	474.74	503.99	533.19	562.34	591.45	-	-	
50	1270	187.02	248.97	279.87	310.72	341.52	372.27	393.76	402.97	433.62	464.22	494.79	525.28	555.74	586.14	616.50	-	-	
52	1320.8	194.54	258.99	291.14	323.24	355.30	387.30	409.67	419.25	451.16	483.02	514.82	546.58	578.28	609.95	641.55	-	-	
54	1371.6	202.05	268.01	302.42	335.77	369.08	402.33	425.58	435.54	468.70	501.81	534.87	567.88	600.84	633.75	666.61	-	-	
56	1422.4	209.57	279.03	313.69	348.30	382.86	417.37	441.49	451.83	486.24	520.60	554.91	589.17	623.39	657.55	691.66	-	-	
58	1473.2	217.09	289.05	324.96	360.83	396.64	432.40	457.40	468.11	503.77	539.39	574.95	610.47	645.93	681.35	716.72	-	-	
60	1524	224.60	299.08	336.24	373.35	410.42	447.43	489.22	484.40	521.31	558.18	595.00	631.76	668.48	705.15	741.77	-	-	
62	1574.8	232.12	309.10	347.51	385.88	424.20	462.46	489.22	500.68	538.85	576.97	615.04	653.06	691.03	728.95	766.83	-	-	
64	1625.6	239.64	319.12	358.79	398.41	437.98	477.50	505.13	516.97	556.39	595.76	635.08	674.36	713.58	752.76	791.88	-	-	
66	1676.4	-	-	-	-	-	492.53	-	533.25	573.93	614.55	655.13	695.65	736.13	776.56	816.94	857.27	897.55	
68	1727.2	-	-	-	-	-	507.56	-	549.54	591.47	633.34	675.17	716.95	758.68	800.36	841.99	883.57	925.11	
70	1778	-	-	-	-	-	522.59	-	565.82	609.00	652.13	695.20	738.25	781.23	824.16	867.05	909.88	952.67	
72	1828.8	-	-	-	-	-	537.63	-	582.11	626.54	670.92	715.26	759.54	803.78	847.96	892.10	936.19	980.23	
74	1879.6	-	-	-	-	-	552.66	-	598.39	644.08	689.72	735.30	780.84	826.33	871.77	917.15	962.49	1007.79	
76	1930.4	-	-	-	-	-	567.69	-	614.68	661.62	708.51	755.35	802.14	848.88	895.57	942.21	988.80	1035.35	
78	1981.2	-	-	-	-	-	582.73	-	630.97	679.16	727.3	775.39	823.43	871.43	919.37	967.26	1015.11	1062.91	
80	2032	-	-	-	-	-	597.76	-	647.25	696.69	746.09	795.43	844.73	893.97	943.17	992.32	1041.42	1090.47	
82	2082.8	-	-	-	-	-	612.79	-	663.54	714.23	764.88	815.48	866.02	916.52	966.97	1017.37	1067.72	1118.03	
84	2133.6	-	-	-	-	-	627.82	-	679.82	731.77	783.67	835.52	887.32	939.07	990.77	1042.43	1094.03	1145.59	
86	2184.4	-	-	-	-	-	642.86	-	696.11	749.31	802.46	855.56	908.62	961.62	1014.58	1067.48	1120.34	1173.15	
88	2235.2	-	-	-	-	-	657.89	-	712.39	766.85	821.25	875.61	929.91	984.17	1038.38	1092.54	1146.65	1200.71	
90	2286	-	-	-	-	-	672.92	-	728.68	784.39	840.04	895.65	951.21	1006.72	1062.18	1117.59	1172.95	1228.27	
92	2336.8	-	-	-	-	-	687.95	-	744.96	801.92	858.83	915.83	972.51	1029.27	1085.98	1142.65	1199.26	1255.83	
94	2387.6	-	-	-	-	-	702.99	-	761.25	819.46	877.62	935.74	993.80	1051.82	1109.78	1167.70	1225.57	1283.39	
96	2438.4	-	-	-	-	-	718.02	-	777.53	837.00	896.42	955.78	1015.10	1074.37	1133.59	1192.75	1251.87	1310.95	
98	2489.2	-	-	-	-	-	733.05	-	793.82	854.54	915.21	975.83	1036.40	1096.92	1157.39	1217.81	1278.18	1338.51	
100	2540	-	-	-	-	-	748.09	-	810.11	872.08	934.00	995.87	1057.69	1119.47	1181.19	1242.86	1304.49	1366.07	
102	2590.8	-	-	-	-	-	763.12	-	826.39	889.61	952.79	1015.91	1078.99	1142.01	1204.99	1267.92	1330.80	1393.63	
104	2641.6	-	-	-	-	-	778.15	-	842.68	907.15	971.58	1035.96	1100.28	1164.56	1228.79	1292.97	1357.10	1421.19	
106	2692.4	-	-	-	-	-	793.18	-	858.96	924.69	990.37	1056.00	1121.58	1187.11	1252.59	1318.03	1383.41	1448.75	
108	2743.2	-	-	-	-	-	808.22	-	875.25	942.23	1009.16	1076.04	1142.88	1209.66	1276.40	1343.08	1409.72	1476.31	
110	2794	-	-	-	-	-	823.25	-	891.53	959.77	1027.95	1096.09	1164.17	1232.21	1300.20	1368.14	1436.03	1503.87	
112	2844.8	-	-	-	-	-	838.28	-	907.82	977.31	1046.74	1116.13	1185.47	1254.76	1324.00	1393.19	1462.33	1531.43	
114	2895.6	-	-	-	-	-	853.31	-	924.10	994.84	1065.53	1136.17	1206.77	1277.31	1347.80	1418.25	1488.64	1558.99	
116	2946.4	-	-	-	-	-	868.35	-	940.39	1012.38	1084.32	1156.22	1228.06	1299.86	1371.60	1443.30	1514.95	1586.55	
118	2997.2	-	-	-	-	-	883.38	-	956.67	1029.92	1103.12	1176.26	1249.36	1322.41	1395.41	1468.36	1541.25	1614.11	
120	3048	-	-	-	-	-	898.41	-	972.96	1047.46	1121.91	1196.31	1270.66	1344.96	1419.21	1493.41	1567.56	1641.67	

Weight/M (Kg/M) = (OD-T)×T×0.2466 Not Available Size

OD = Outside Diameter (mm)

T = Thickness (mm)



Lipped Channel

Standard Material:

JIS G 3131 SPHC ,
SAE 1006 / SAE 1008

Std Dimentional Tolerances:

JIS G 3350



Available Size:

CNP 100 x 50 x 2.0 mm up
to CNP 200 x 75 x 3.2 mm

Annual Capacity:

30.000 MT/Year

Lipped Channel is the ultimate alternative instead of Hot / Cold Rolled channel which has the same advantages such as reduced thickness and cost-effectiveness. Lipped Channels are often used for steel structures, storage areas, pollution control devices, and a variety of other architectural needs.

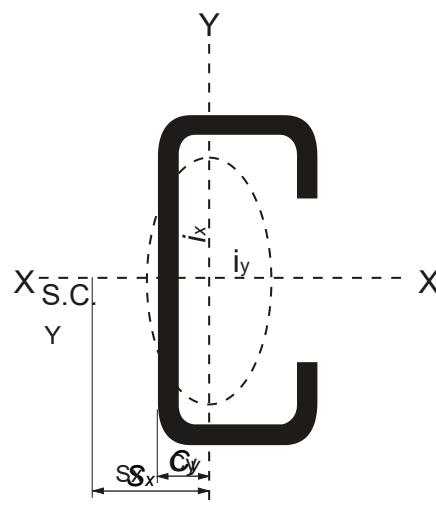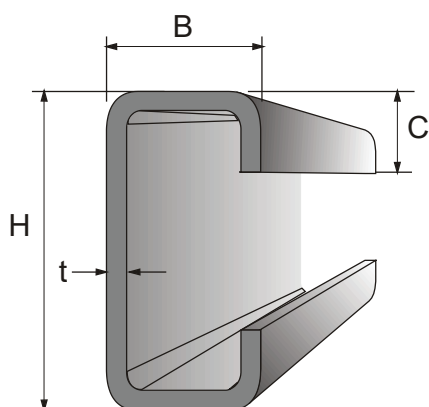

JIS G 3131 / ASTM 830

Metric Size

Dimension		Section Area	Unit Weight	Informative Reference									
				Geometrical Moment of Inertia		Modulus of Section		Modulus of Gyration		Center of Gravity	Shear Center	Torsion Constant	Warping Constant
H x B x C mm	t mm	A cm ²	Kg /m	I _x cm ⁴	I _y cm ⁴	Z _x cm ³	Z _y cm ³	r _x cm	r _y cm	C _y cm	X _o cm	J cm ⁴	C _w cm ⁶
C 100 x 50 x 20	2	4.54	3.56	71	17	14.3	5.4	3.97	1.93	1.87	4.48	605	444
	2.3	5.17	4.06	81	19	16.1	6	3.95	1.92	1.86	4.46	912	496
	2.5	5.59	4.39	87	20	17.3	6.5	3.94	1.9	1.86	4.45	1164	528
	2.8	6.2	4.87	95	22	19.1	7.1	3.92	1.89	1.86	4.42	1621	574
	3	6.61	5.19	101	23	20.2	7.4	3.91	1.88	1.86	4.41	1982	603
	3.2	7.01	5.5	106	24	21.3	7.8	3.9	1.87	1.86	4.4	2392	630
C 125 x 50 x 20	2	5.04	3.95	120	18	19.3	5.5	4.89	1.91	1.69	4.15	672	675
	2.3	5.75	4.51	136	21	21.8	6.2	4.87	1.89	1.69	4.12	1013	755
	2.5	6.21	4.88	147	22	23.5	6.6	4.86	1.88	1.69	4.11	1295	805
	2.8	6.9	5.42	162	24	25.9	7.2	4.84	1.86	1.69	4.08	1804	877
	3	7.36	5.78	172	25	27.5	7.6	4.83	1.85	1.69	4.07	2207	922
	3.2	7.81	6.13	181	27	29	8	4.82	1.84	1.68	4.05	2665	965
C 150 x 50 x 20	2	5.54	4.35	185	19	24.7	5.6	5.79	1.87	1.55	3.86	738	971
	2.3	6.32	4.96	210	22	28	6.3	5.77	1.86	1.55	3.84	1115	1088
	2.5	6.84	5.37	226	23	30.2	6.8	5.75	1.85	1.55	3.82	1425	1162
	2.8	7.6	5.97	250	26	33.3	7.4	5.73	1.83	1.54	3.8	1987	1267
	3	8.11	6.37	265	27	35.4	7.8	5.72	1.82	1.54	3.78	2432	1334
	3.2	8.61	6.76	280	28	37.4	8.2	5.71	1.81	1.54	3.77	2938	1398
C 150 x 65 x 20	2	6.14	4.82	218	36	29.1	8.3	5.96	2.43	2.12	5.19	818	1784
	2.3	7.01	5.5	248	41	33	9.4	5.94	2.42	2.12	5.16	1236	2006
	2.5	7.59	5.96	267	44	35.6	10	5.93	2.41	2.12	5.15	1581	2148
	2.8	8.44	6.63	295	48	39.4	11	5.91	2.39	2.12	5.13	2207	2352
	3	9.01	7.07	314	51	41.8	11.6	5.9	2.38	2.11	5.11	2702	2482
	3.2	9.57	7.51	332	54	44.2	12.2	5.89	2.37	2.11	5.09	3265	2608
C 200 x 75 x 20	2	7.54	5.92	467	56	46.7	10.6	7.87	2.73	2.2	5.49	1005	4571
	2.3	8.62	6.77	531	64	53.1	12	7.85	2.72	2.2	5.47	1520	5159
	2.5	9.34	7.33	573	68	57.3	12.9	7.84	2.71	2.2	5.45	1946	5537
	2.8	10.4	8.17	636	75	63.6	14.2	7.82	2.69	2.2	5.42	2719	6085
	3	11.11	8.72	676	80	67.6	15	7.8	2.68	2.19	5.41	3332	6437
	3.2	11.81	9.27	716	84	71.6	15.8	7.79	2.67	2.19	5.39	4030	6779

Technical Specification Material : JIS G 3131 / ASTM 830, Symbol : SPHC/ SAE 1006/ SAE 1008
Standard length : 6 Meters, Dimension Tolerance : JIS G 3350

Note: Non standard sizes are available upon request and subject to minimum quantity

SNI 07-0138-1987

Dimension		Section Area	Unit Weight	Informative Reference									
				Geometrical Moment of Inertia		Modulus of Section		Modulus of Gyration		Center of Gravity	Shear Center	Torsion Constant	Warping Constant
H x B x C mm	t mm	A cm ²	Kg /m	I _x cm ⁴	I _y cm ⁴	Z _x cm ³	Z _y cm ³	r _x cm	r _y cm	C _y cm	X _o cm	J cm ⁴	C _w cm ⁶
C 100 x 50 x 20	2.0	4.437	3.56	71	17	14.3	5.4	3.97	1.93	1.87	4.48	605	444
	2.3	5.172	4.06	81	19	16.1	6.0	3.95	1.92	1.86	4.46	912	496
	2.8	6.205	4.87	95	22	19.1	7.1	3.92	1.89	1.86	4.42	1621	574
	3.2	7.007	5.50	106	24	21.3	7.8	3.90	1.87	1.86	4.40	2392	630
C 125 x 50 x 20	2.3	5.747	4.51	136	21	21.8	6.2	4.87	1.89	1.69	4.12	1013	755
	3.2	7.807	6.13	181	27	29.0	8.0	4.82	1.84	1.68	4.05	2665	965
C 150 x 50 x 20	2.3	6.32	4.96	210	22	28.0	6.3	5.77	1.86	1.55	3.84	1115	1088
	3.2	8.607	6.76	280	28	37.4	8.2	5.71	1.81	1.54	3.77	2938	1398
C 150 x 65 x 20	2.3	7.01	5.50	248	41	33.0	9.4	5.94	2.42	2.12	5.16	1236	2006
	3.2	9.57	7.51	332	54	44.2	12.2	5.89	2.37	2.11	5.09	3265	2608
C 200 x 75 x 20	3.2	11.81	9.27	716	84	71.6	15.8	7.79	2.67	2.19	5.39	4030	6779

Chemical Composition

- Carbon (C) : 0.25 % max
- Phosphor (p) : 0.05 % max
- Sulfur (s) : 0.05 % max

Mechanical Properties

- Tensile Strength : 176.4 N/mm² min
- Yield Strength : 333.2 N/mm² min
- Elongation : 21 % min

Tolerance

- Thickness ≤ 2.3 mm : ± 0.24 mm
- ≤ 3.2 mm : ± 0.3 mm
- High (H) ≤ 125 mm : ± 1.5 mm
- ≤ 250 mm : ± 2.0 mm
- Width (B) ≤ 75 mm : ± 2.0 mm
- Lip (C) ≤ 25 mm : ± 2.0 mm
- Length 6 - 7 M : ± 40 mm



ERW Pipe

(Electric Resistance
Welded Pipe)

With many different application and uses that can be achieved from using round pipe products, at GRP we manufactured our pipe from 2 3/8" OD in a variety of length to over 100 feet using Electric Resistance Welding (ERW) methods.

As we strive to maintain to the highest standard quality, our ERW tubular pipe complied with different local and international standard specifications for its varying application requirements.

The surface finish for this product is available in bare or in coated form and the processing will be carried out in our facility. For the application carrying flow of water / liquid material, we can also perform hydrostatic testing on the products to ensure leakage-proof in its operations.

Standard & Specification:

ASTM A53 (A), BS 1387 : 1985
Heavy Series (H)
Medium Series (M)
Light Series (L)
BS EN 10255 : 2004 (E)
JIS G 3444 STK 290,

JIS G 3444 STK 400,
JIS G 3445 STKM 11 A, STKM 12 A
JIS G 3452 SGP Black And Galvanized Pipe,
JIS G 3454 STPG 370,
SNI 07 – 0068 – 2007 PKB 30,
SNI 07 – 0068 2007 PKB 41

Available Size:

1 inch OD to 6 inch OD
(Outside Diameter)
Thickness 2mm-6mm

Annual Capacity:

70.000 MT/Year

ASTM A 53 (A)

Normal Size		Outside Diameter (mm)	Thickness (mm)	Sch	Test Pressure	
DN	NPS				Psi	Kg/cm ²
25	1"	33,4	3,38	40	700	49
32	1 1/4"	42,2	3,56	40	1200	85
40	1 1/2"	48,3	3,68	40	1200	85
50	2"	60,3	3,91	40	2300	161
65	2 1/2"	73	5,16	40	2500	175
80	3"	88,9	3,18	-	1290	91
			3,96	-	1600	112
			4,78	-	1930	136
			5,49	40	2220	156
100	4"	114,3	3,18	-	1000	70
			3,96	-	1250	88
			4,78	-	1500	105
			5,56	-	1750	123
			6,02	40	1900	134

Chemical composition

Carbon (C)	: 0.25 % max
Phosphorus (p)	: 0.05 % max
Sulphur (s)	: 0.045 % max

Mechanical properties

Tensile Strength	: 330 N/mm ² Min
Yield Strength	: 205 N/mm ² Min
Elongation	: 22% min

tolerance

Thickness	: ± 12.5%
Outside Diameter	
OD ≤ 48.3 mm	: ± 0.4 mm
OD ≥ 60.3 mm	: ± 1 %

BS 1387:1985

Light (L)

Normal Size		Outside Diameter		Wall Thickness T (mm)	Hydrostatic Test	
DN (mm)	Thread Size R	Max (mm)	Min (mm)		Psi	BAR
25	1	33,8	33,2	2,6	730	50
32	1 1/4	42,5	41,9	2,6	730	50

Chemical composition

Carbon (C)	: 0.20 % max
Phosphorus (p)	: 0.045 % max
Sulphur (s)	: 0.045 % max

Mechanical properties

Tensile Strength	: 320 ~ 460 N/mm ²
Yield Strength	: 195 N/mm ² Min
Elongation	: 20% min

Tolerance

Thickness light tubes	: - 8%
Medium and heavy tubes	: - 10%

BS 1387:1985

Medium Series (M)

Normal Size		Outside Diameter		Wall Thickness T (mm)	Hydrostatic Test	
DN (mm)	Thread Size R	Max (mm)	Min (mm)		Psi	BAR
32	1 1/4	42,9	42,1	3,2	730	50
40	1 1/2	48,8	48	3,2	730	50
50	2	60,8	59,8	3,6	730	50
65	2 1/2	76,6	75,4	3,6	730	50
80	3	89,5	88,1	4,0	730	50
100	4	114,9	113,3	4,5	730	50
125	5	140,6	138,7	5,0	730	50
150	6	166,1	164,1	5,0	730	50

BS 1387:1985

Heavy (H)

Normal Size		Outside Diameter		Wall Thickness T (mm)	Hydrostatic Test	
DN (mm)	Thread Size R	Max (mm)	Min (mm)		Psi	BAR
65	2 1/2	76,6	75,4	4,5	730	50
80	3	89,5	88,1	5,0	730	50
100	4	114,9	113,3	5,4	730	50
125	5	140,6	138,7	5,4	730	50
150	6	166,1	164,1	5,4	730	50

BS EN 10255:2004 (E)

Type L

Nominal Size		Specified Outside Diameter (mm)	Outside Diameter		Wall Thickness T (mm)	Hydrostatic Test	
DN (mm)	Thread Size R		Max (mm)	Min (mm)		Psi	BAR
25	1	33.7	34.2	33.3	2.9	730	50
32	1 1/4	42.4	42.9	42	2.9	730	50
40	1 1/2	48.3	48.8	47.9	2.9	730	50
50	2	60.3	60.8	59.7	3.2	730	50
65	2 1/2	76.1	76.6	75.3	3.2	730	50
80	3	88.9	89.5	88	3.2	730	50
100	4	114.3	115	113.1	3.6	730	50
125	5	139.7	140.8	138.5	4.5	730	50
150	6	165.1	166.5	163.9	4.5	730	50

Type L2

Nominal Size		Specified Outside Diameter (mm)	Outside Diameter		Wall Thickness T (mm)	Hydrostatic Test	
DN (mm)	Thread Size R		Max (mm)	Min (mm)		Psi	BAR
25	1	33.7	34.2	33.3	2.6	730	50
32	1 1/4	42.4	42.9	42	2.6	730	50
40	1 1/2	48.3	48.8	47.9	2.9	730	50
50	2	60.3	60.8	59.7	2.9	S	50
65	2 1/2	76.1	76.6	75.3	3.2	730	50
80	3	88.9	89.5	88	3.2	730	50
100	4	114.3	115	113.1	3.6	730	50

Type LI

Nominal Size		Specified Outside Diameter (mm)	Outside Diameter		Wall Thickness T (mm)	Hydrostatic Test	
DN (mm)	Thread Size R		Max (mm)	Min (mm)		Psi	BAR
25	1	33.7	34.2	33.3	2.9	730	50
32	1 1/4	42.4	42.9	42	2.9	730	50
40	1 1/2	48.3	48.8	47.9	2.9	730	50
50	2	60.3	60.8	59.7	3.2	730	50
65	2 1/2	76.1	76.6	75.3	3.2	730	50
80	3	88.9	89.5	88	3.6	730	50
100	4	114.3	115	113.1	4.0	730	50

Heavy Series (H)

Nominal Size		Specified Outside Diameter (mm)	Outside Diameter		Wall Thickness T (mm)	Hydrostatic Test	
DN (mm)	Thread Size R		Max (mm)	Min (mm)		Psi	BAR
50	2	60.3	60.8	59.7	4.5	730	50
65	2 1/2	76.1	76.6	75.3	4.5	730	50
80	3	88.9	89.5	88	5.0	730	50
100	4	114.3	115	113.1	5.4	730	50
125	5	139.7	140.8	138.5	5.4	730	50
150	6	165.1	166.5	163.9	5.4	730	50

BS EN 10255:2004 (E)

Medium Series (M)

Nominal Size		Specified Outside Diameter (mm)	Outside Diameter		Wall Thickness T (mm)	Hydrostatic Test	
DN (mm)	Thread Size R		Max (mm)	Min (mm)		Psi	Bar
25	1	33.7	34.2	33.3	3.2	730	50
32	1 1/4	42.4	42.9	42	3.2	730	50
40	1 1/2	48.3	48.8	47.9	3.2	730	50
50	2	60.3	60.8	59.7	3.6	730	50
65	2 1/2	76.1	76.6	75.3	3.6	730	50
80	3	88.9	89.5	88	4.0	730	50
100	4	114.3	115	113.1	4.5	730	50
125	5	139.7	140.8	138.5	5.0	730	50
150	6	165.1	166.5	163.9	5.0	730	50



JIS G 3444 STK 290

Outside Diameter (mm)	Thickness (mm)	Cros Sectional Area cm ²
34	2,3	2,291
42,7	2,3	2,919
	2,5	3,157
48,6	2,3	3,345
	2,5	3,621
	2,8	4,029
	3,2	4,564
60,5	2,3	4,205
	3,2	5,760
	4,0	7,100
	2,8	6,495
76,3	3,2	7,349
	4,0	9,085
89,1	2,8	7,591
	3,2	8,636
114,3	3,2	11,17
	3,5	12,18
	4,5	15,52
139,8	3,6	15,4
	4,0	17,07
	4,5	19,13
	6,0	25,22
165,2	4,5	22,72
	5,0	25,16
	6,0	30,01
	7,1	35,26

Chemical composition

Posphor (p)	: 0.05 % max
Sulphur (s)	: 0.05 % max

Mechanical properties

Tensile Strength	: 290 N/mm ² Min
Yield Strength	: -
Elongation	:
>1mm to 2mm	: 21%
>2mm to 3mm	: 22%
>3mm to 4mm	: 24%
>4mm to 5mm	: 26%
>5mm to 6mm	: 27%
>6mm to 7mm	: 28%

Tolerance

Thickness < 4 mm	: + 0.6% - 0.5 mm
4 mm to 12 mm	: + 15 % - 12.5 %
Length	: + Not specified - 0 mm
Outside Diameter	:
OD < 50 mm	: ± 0.5 mm
OD ≥ 50mm	: ± 1 %

NOTE : Non standard sizes are available upon request and subject to minimum quantity.



JIS G 3444 STK 400

Outside Diameter (mm)	Thickness (mm)	Cros Sectional Area cm ²
48,6	2,3	3,345
	2,5	3,621
	2,8	4,029
60,5	2,3	4,205
	3,2	5,760
76,3	2,8	6,495
	3,2	7,349
89,1	2,8	7,591
	3,2	8,636
114,3	3,2	11,17
	3,5	12,18
	4,5	15,52
139,8	3,6	15,4
	4,0	17,07
	4,5	19,13
165,2	4,5	22,72
	5,0	25,16
	6,0	30,01

NOTE : Non standard sizes are available upon request and subject to minimum quantity.

SNI 07-0068-1987 PKB 30

Nominal Size		Outside Diameter (mm)	Thickness (mm)	Cross Sectional Area cm ²
A	B			
25	1"	34	2.3	2.291
32	1 1/4"	42.7	2.3	2.919
			2.8	3.157
			2.3	3.345
40	1 1/2"	48.6	2.8	4.029
			3.2	4.564
			2.3	4.205
50	2"	60.5	3.2	5.760
			4.0	7.100
			2.8	6.465
			3.2	7.439
65	2 1/2"	76.3	4.0	9.085
			2.8	7.591
80	3"	89.1	3.2	8.936
			4.0	10.690
			3.2	11.170
100	4"	114.3	3.6	12.520
			4.5	15.520
125	5"	139.8	3.6	15.400
			4.0	17.070
			4.5	19.130
			6.0	25.220
			4.5	22.720
150	6"	165.2	5.0	25.160
			6.0	30.010
			7.0	34.790

NOTE : Non standard sizes are available upon request and subject to minimum quantity.

Chemical composition

Carbor (C)	: 0.25 % max
Posphor (p)	: 0.04 % max
Sulphur (s)	: 0.04 % max

Mechanical properties

Tensile Strength	: 400 N/mm ² Min
Yield Strength	: 235 N/mm ² Min
Elongation	:
>1mm to 2mm	: 14%
>2mm to 3mm	: 16%
>3mm to 4mm	: 17%
>4mm to 5mm	: 18%
>5mm to 6mm	: 20%
>6mm to 7mm	: 22%

Tolerance

Thickness <4mm	: + 0,6 mm - 0,5 mm
4 mm to 12 mm	: + 15 % - 12,5 %
Length	: + 50 mm -0 mm
Outside Diameter	
OD < 50 mm	: + Not specified ± 0,5 mm
OD ≥ 50mm	: ± 1 %

Chemical Composition

• Phosphor (p)	: 0.05 % max
• Sulfur (s)	: 0.05 % max

Mechanical Properties

• Tensile Strength	: 294 N/mm ² min
• Yield Strenth	: -
• Elongation	: 21 % min

Tolerance

• Thickness < 3 mm	: ± 0.3mm
3 mm s/d 12 mm	: ± 10 %
• Length	: ± 2 %
• Outside Diameter	
OD ≤ 50 mm	: ± 0.5 mm
OD ≥ 50 mm	: ± 1 %
Standard length of pipe	: 6000 mm

SNI 07-0039-1987 (Medium)

Galvanized Pipe

Nominal Size		Outside Diameter (mm)	Thickness (mm)	Cross Sectional Area cm ²
A	B			
32	1 1/4"	42.7	2.8	3.510
40	1 1/2"	48.6	2.8	4.029
			3.2	4.564
50	2"	60.5	2.3	4.205
			3.2	5.760
65	2 1/2"	76.3	2.8	6.465
			3.2	7.349
80	3"	89.1	2.8	7.591
			3.2	8.936
100	4"	114.3	3.2	11.170
			3.6	12.520
			3.6	15.400
125	5"	139.8	4.0	17.070
			4.5	19.130
			6.0	23.600
150	6"	165.2	4.5	22.720
			5.0	25.160
			6.0	30.010
			7.0	34.790

Chemical Composition

- Carbon (C) : 0.25 % max
- Phosphor (p) : 0.04 % max
- Sulfur (s) : 0.04 % max

Mechanical Properties

- Tensile Strength : 402 N/mm² min
- Yield Strength : 235 N/mm² min
- Elongation : 14 % min

Tolerance

- Thickness < 3 mm : ± 0.3mm
- 3 mm s/d 12 mm : ± 10 %
- Length : ± 2 %
- Outside Diameter
 - OD ≤ 50 mm : ± 0.5 mm
 - OD ≥ 50 mm : ± 1 %
- Standard length of pipe : 6000 mm

SNI - 07 - 0039 - 1987 (Medium)

Galvanized Pipe

Nominal Size		Outside Diameter (mm)		Thickness (mm)	Test Pressure	
A	B	Max	Min		Psi	Kgf/cm ²
25	1"	34.2	33.4	3.25	710	50
32	1 1/4"	42.9	42.1	3.25	710	50
40	1 1/2"	48.80	48.0	3.25	710	50
50	2"	60.8	59.8	3.65	710	50
65	2 1/2"	76.6	75.4	3.65	710	50
80	3"	89.5	88.1	4.05	710	50
100	4"	114.9	113.3	4.5	710	50
125	5"	140.6	138.7	4.85	710	50
250	6"	166.1	164.1	4.9	710	50

Chemical Composition

- Phosphor (p) : 0.05 % max
- Sulfur (s) : 0.05 % max

Mechanical Properties

- Tensile Strength : 33 Kgf/mm² min
- Elongation : 20 % min

Tolerance

- Thickness : + Unlimited
: - 10%
- Length : ± 2 %
- Weight with zinc : 300 gr/m²
- Standard length of pipe : 6000 mm

JIS G3452 SGP

Black Galvanized Pipe

Normal Size		Outside Diameter (mm)	Thickness (mm)	Test Pressure	
A	B			Psi	Kgf/cm ²
25	1"	34	3,2	365	25
32	1 1/4"	42,7	3,5	365	25
40	1 1/2"	48,6	3,5	365	25
50	2"	60,5	3,8	365	25
65	2 1/2"	76,3	4,2	365	25
80	3"	89,1	4,2	365	25
100	4"	114,3	4,5	365	25
125	5"	139,8	4,5	365	25
150	6"	165,2	5,0	365	25

Chemical composition

- Phosphor (p) : 0.04 % max
- Sulphur (s) : 0.04 % max

Mechanical properties

- Tensile Strength : 290 N/mm² Min
- Elongation :
 - Over 3mm up to and incl 4mm : 24%
 - Over 3mm up to and incl 4mm : 26%

Tolerance

- Thickness : + Not specified
: - 12.5%
- Outside Diameter :
 - OD < 50 mm : ± 0.5 mm
 - OD ≥ 50mm : ± 1 %
- Weight with Zinc 400 gr/m²

NOTE : Non standard sizes are available upon request and subject to minimum quantity.

JIS G 3445

Carbon Steel Tube For Machine Structural Purposes

Outside Diameter (mm)	STKM 11 A	STKM 13 A	STKM 14 A
	Tch (mm)	Tch (mm)	Tch (mm)
33,4	2 sd 3.2	2 sd 3.2	2 sd 2.2
42,2	2 sd 3.4	2 sd 3.4	2 sd 2.5
48,3	2 sd 3.6	2 sd 3.6	2 sd 2.8
60,3	2 sd 4.0	2 sd 4.0	2 sd 3.2
73	2 sd 4.85	2 sd 4.85	2 sd 3.4
76	2 sd 4.85	2 sd 4.85	2 sd 3.4
88,9	2 sd 5.2	2 sd 5.2	2 sd 3.6
114,3	2.5 sd 5.8	2.5 sd 5.8	2.5 sd 4.5
139,8	3.6 sd 6.5	3.6 sd 6.5	3.6 sd 6.0
165,2	3.6 sd 7.0	3.6 sd 7.0	3.6 sd 6.5

Note: Non standard sizes are available upon request and subject to minimum quantity.

Grade			Designation		Chemicals composition %					Mechanical Property						
					C Max	Si Max	Mn Max	P Max	S Max	Tensile test				Flatning test (D:Outside diameter)	Bending test	
										Ts Min	Ys Min	El Min (%)			Bending angle	Inside radius
												N/mm²	N/mm²			
Grade 11	A	STKM 11 A	0,12	0,35	0,6	0,04	0,04	290	-	35	30	½ D	180°	4 D		
Grade 13	A	STKM 13 A	0,25	0,35	0.3 to 0.9	0,04	0,04	370	215	30	25	¾ D	90°	6 D		
Grade 14	A	STKM 14 A	0,3	0,35	0.3 to 1.0	0,04	0,04	410	245	25	20	¾ D	90°	6 D		

Elongation of tubes with a wall thickness under 8mm

Grade	Symbol of grade	Test piece	Wall Thickness					
			>1mm to 2mm	>2mm to 3mm	>3mm to 4mm	>4mm to 5mm	>5mm to 6mm	>6mm to 7mm
Grade 11	A	STKM 11 A	Test piece no.5	21 Min	22 Min	24 Min	26 Min	27 Min
			Test piece no.12	26 Min	28 Min	29 Min	30 Min	32 Min
Grade 13	A	STKM 13 A	Test piece no.5	16 Min	18 Min	19 Min	20 Min	22 Min
			Test piece no.12	21 Min	22 Min	24 Min	26 Min	27 Min
Grade 14	A	STKM 14 A	Test piece no.5	11 Min	12 Min	14 Min	16 Min	17 Min
			Test piece no.12	16 Min	18 Min	19 Min	20 Min	22 Min

Standar Tolerances

Standard Tolerances					
Division	Tolerances on outside diameter	Division	Tolerances on wall thickness		
1	Under 50 mm	± 0.5 mm	1	Under 4 mm	+ 0.6 mm
	50 mm or ofer	± 1 %			- 0.5 mm
2	Under 50 mm	± 0.25 mm		4 mm or over	+ 15 %
	50 mm or ofer	± 0.5 %			- 12.5 %
3	Under 25mm	± 0.12 mm	2	Under 3 mm	± 0.3 mm
	25 mm or over to and excl. 40mm	± 0.15 mm		3 mm or over	± 10 %
	40 mm or over to and excl. 50 mm	± 0.18 mm			
	50 mm or over to and excl. 60 mm	± 0.2 mm			
	60 mm or over to and excl. 70 mm	± 0.23 mm			
	70 mm or over to and excl. 80 mm	± 0.25 mm	3	Under 2 mm	± 0.15 mm
	80 mm or over to and excl. 90 mm	± 0.3 mm		2 mm or over	± 8 %
	90 mm or over to and excl. 100 mm	± 0.4 mm			
	100 mm or over	± 0.5 %			
	Tolerances			+50	
			-0		

* If there are no found special agreement between the order and manufacturer while processing the order, Then for the tolerance outside the diameter will be applied the rule no. 1, and the tolerance of wall thickness would be the rule no. 2.

SNI 0039 2013

Galvanized Pipe & Black Pipe (Tipis)

Diameter dalam Normal		Diameter luar (mm)			Thickness (mm)	Test Pressure	
(mm)	(inci)	Normal	Max	Min		Psi	Kgf/cm ²
25	1"	33,6	34	33,2	2,6	710	50
32	1 1/4"	42,3	42,7	41,9	2,6	710	50
40	1 1/2"	48,20	48,60	47,8	2,9	710	50
50	2"	60,2	60,8	59,6	2,9	710	50
65	2 1/2"	76	76,7	75,2	3,2	710	50
80	3"	88,8	89,7	87,9	3,2	710	50
100	4"	114,1	115,3	113	3,6	710	50
125	5"	139,7	140,5	137,7	3,6	710	50
150	6"	165,1	166,8	163,4	3,6	710	50

Chemical Composition

Carbon (C)	: 0.2 % max
Mangan (Mn)	: 1.4 % max
Posphor (p)	: 0.035 % max
Belarang (s)	: 0.03 % max

Mechanical properties

Tensile Strength	: 33 sd 47 kgf/mm ²
Yield Strength	: 20 kgf/mm ² min
Elongation	: 20% min

Tolerance

Pipe Standard Length	: 6000 mm
	: 12000 mm
Length 6 m	: + 100
	: - 0
Length 12 m	: + 100
	: - 0
Weight with Zinc 300 gr/m ²	:

SNI 0039 2013

Galvanized Pipe & Black Pipe (Medium)

Diameter dalam Normal		Diameter luar (mm)			Thickness (mm)	Test Pressure	
(mm)	(inci)	Normal	Max	Min		Psi	Kgf/cm ²
25	1"	33,7	34,2	33,3	3,2	710	50
32	1 1/4"	42,4	42,9	42	3,2	710	50
40	1 1/2"	48,30	48,80	47,9	3,2	710	50
50	2"	60,3	60,8	59,7	3,6	710	50
65	2 1/2"	76,1	76,6	75,3	3,6	710	50
80	3"	88,9	89,5	88	4	710	50
100	4"	114,3	115	113,1	4,5	710	50
125	5"	139,7	140,8	138,5	5	710	50
150	6"	165,1	166,5	163,9	5	710	50

Pipa Tipis

• Tebal	:	+ 10%
		- 8%

Pipa Medium

• Tebal	:	+ 15%
		- 10%

Pipa Medium

• Tebal	:	+ 15%
		- 12.5%

SNI 0039 2013

Galvanized Pipe & Black Pipe (Tebal)

Diameter dalam Normal		Diameter luar (mm)			Thickness (mm)	Test Pressure	
(mm)	(inci)	Normal	Max	Min		Psi	Kgf/cm ²
65	2 1/2"	76	76,6	75,4	4,5	710	50
80	3"	88,8	89,5	88,1	5	710	50
100	4"	114,1	114,9	113,3	6,0	710	50
125	5"	139,7	142,7	138,7	6,6	710	50

SNI 0068 : 2013 PKB (STK) - 290

Outside Diameter (mm)	Thickness (mm)	Cros Sectional Area cm ²
34	2,3	2,291
42,7	2,3	2,919
	2,5	3,157
48,6	2,3	3,345
	2,8	4,029
60,5	3,2	4,564
	2,3	4,205
76,3	3,2	5,760
	4,0	7,100
89,1	2,8	6,465
	3,2	7,349
114,3	4,0	9,085
	2,8	7,591
139,8	3,2	8,636
	4,0	10,690
165,2	3,2	11,170
	3,6	12,520
190,5	4,5	15,520
	5,6	19,120
219,1	3,6	15,400
	4,0	17,070
244,5	4,5	19,130
	6,0	25,220
273,0	4,5	22,720
	5,0	25,160
305,0	6,0	30,010
	7,0	34,790

Chemical Composition

Posphor (p)	: 0.05 % max
Belarang (s)	: 0.05 % max

Mechanical properties

Tensile Strength	: 294 n/mm ² Min
Yield Strength	: -
Elongation	: 30 % Min
Uji tarik untuk pipa dengan tebal kurang dari 8mm di lakukan dengan batang uji No.12 atau No.5, nilai minimum elongasi dapat di hitung dengan mengurangi elongasi tersebut dengan laju pengurangan 1.5% per 1mm	

Tolerance

Thickness < 4 mm	: ± 0.6 mm - 0.5 mm
4 mm s/d 12 mm	: + 15 % - 12.5 %
Length	: + 50 mm - 0 mm
Outside Diamenter	:
OD < 50 mm	: ± 0.5 mm
OD ≥ 50mm	: ± 1 %
Panjang Standard Pipa = 6000 mm dan 12000 mm	

SNI 0068 : 2013 PKB (STK) - 400

Outside Diameter (mm)	Thickness (mm)	Cros Sectional Area cm ²
48,6	2,3	3,345
	2,8	4,029
60,5	2,3	4,205
	3,2	5,760
76,3	2,8	6,465
	3,2	7,349
89,1	2,8	7,591
	3,2	8,636
114,3	3,2	11,170
	3,6	12,520
139,8	4,5	15,520
	3,6	15,400
165,2	4,0	17,070
	4,5	19,130
190,5	4,5	22,720
	5,0	25,160
219,1	6,0	30,010

Chemical Composition

Posphor (p)	: 0.05 % max
Belarang (s)	: 0.05 % max


Mechanical properties

Tensile Strength	: 294 n/mm ² Min
Yield Strength	: -
Elongation	: 30 % Min
Uji tarik untuk pipa dengan tebal kurang dari 8mm di lakukan dengan batang uji No.12 atau No.5, nilai minimum elongasi dapat di hitung dengan mengurangi elongasi tersebut dengan laju pengurangan 1.5% per 1mm	

Tolerance

Thickness < 4 mm	: ± 0.6 mm - 0.5 mm
4 mm s/d 12 mm	: + 15 % - 12.5 %
Length	: + 50 mm - 0 mm
Outside Diamenter	:
OD < 50 mm	: ± 0.5 mm
OD ≥ 50mm	: ± 1 %
Panjang Standard Pipa = 6000 mm dan 12000 mm	



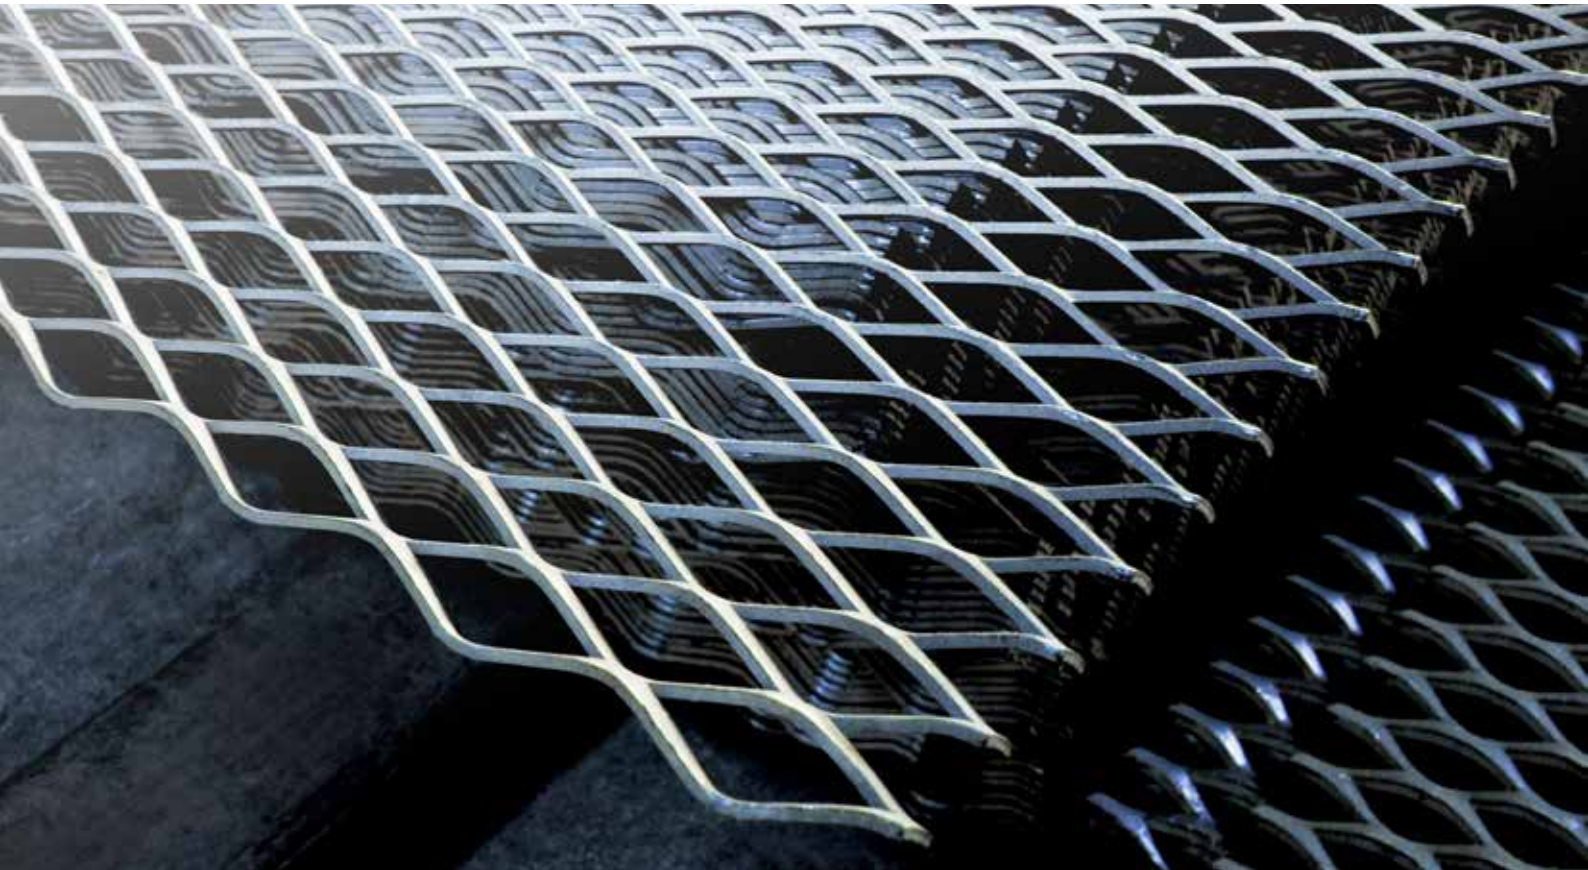

Expanded Mesh

Expanded mesh is one continuous single sheet of mesh produced when a flat metal plate is sheared and stretched but is left intact at the 'knuckles'. It is available in a variety of thicknesses with differing sizes and designs of the apertures.

A further feature is the provision of an excellent anti-slip surface. This makes the product suitable for ramps (e.g. inclined walkways adjacent to conveyors) platforms and stair treads. The open nature of the product provides good visibility through the mesh as well as the easy passage of air and sound whilst ensuring security and protection.

Standard & Specification:



JIS G 3351
JIS G 3131
ASTM 830

Available Size:


22 x 57 mm up to
75 x 200 mm
Thickness 4.85mm

Annual Capacity:

3.000 MT/Year



JIS G 3131 / ASTM A 830



A-A

Type		Dimension		Mesh Size		Prod. Size	
		SWM	LWM	T	Width	L	P (S)
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
Expanded Ornameash	EOM 3035	22	57	3,0	3,5	1200	2400
	EOM 3045	35	76	3,0	4,5	1200	2400
Expanded Grid Mesh	EGM 30080	30	75	3,0	8,0	1200	2400
	EGM 50075	25	75	5,0	7,5	1200	2400
	EGM 50105	30	75	5,0	10,5	1200	2400
	EGM 50080	42	135	5,0	8,0	1200	2400
	EGM 50110	45	135	5,0	11,0	1200	2400
Expanded Merapi Mesh	EMM 50050	75	200	5,0	5,0	1200	2400
	EMM 30050	75	200	3,0	5,0	1200	2400
Expanded Merapi Mesh	EDM 30032	25	80	3,0	3,2	1200	2400

Material : JIS G 3131/ASTMA 830
Grade : SPHC/SAE 1006/1008
Tolerance : According to JIS G 3351

Tolerance on SW +/- 5%
Tolerance on LW +/- 2 mm
Tolerance on S + 25 mm, - 0 mm

Tolerance on L Value Given in JIS on Steel Sheet and Plate
Tolerance on T Value Given in JIS on Steel Sheet and Plate
Tolerance on Weight +/- 10 %
Deflection 5 mm or less per 1000 mm and not more than
 5 mm x (length mm/1000 mm) for overall length






Drawn Wire

Straight wire that is plain (round steel) or rib (deformed steel). Drawn or rolled wire is cold-worked from steel wire rod that has been hot rolled from billets and produced as both bright basic and deformed wire.

Standard & Specification:
JIS G3551

Size Chart:
Ø 4.0 – 5.5 mm
(plain wire)
Ø 4.0 – 10.0 mm
(rib wire)

Production Capacity:
150 ton/month

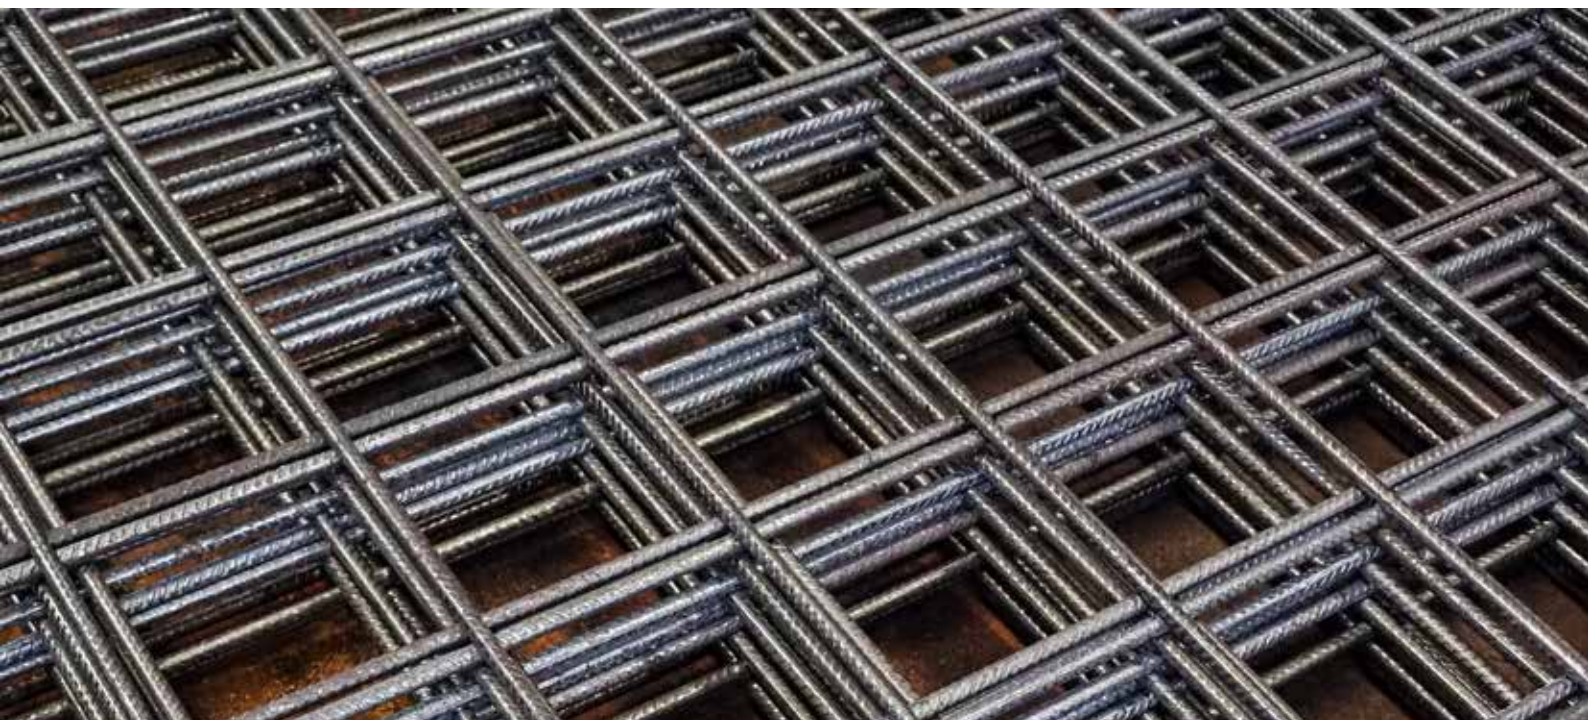

Wire Mesh

Our pre-fabricated rebar mesh is made of high quality steel bar produced from our own quality steel and are welded together to form a pre-made mesh section.

With different sizes, the pre-made section is leveled and flat with sturdy structure. Depending on the size, our mesh section can be used for road construction, fences, racks, concrete walls and floors for factory and commercial building. It has been rust-proofed to stand against weather elements. Our mesh section can be supplied in rolls or panels.

Standard & Specification:

JIS G 3551 /

SNI 07-0663-1995

Available Size:

Diameter; 4mm – 12mm

Dimension; 5.4mtr x 2.1mtr

Annual Capacity:

120.000 MT/Year

Refer To Jis G3551 - WFR

No.	Specification	Units	WMS 5	WMS 6	WMS 7	WMS 8	WMS 9	WMS 10	WMS 11	WMS 12
A. Material / Ribs Wire										
1.	Diameter	mm	4.80 - 5.20	5.80 - 6.20	6.80 - 7.20	7.80 - 8.20	8.80 - 9.20	9.80 - 10.20	10.80 - 11.20	11.80 - 12.20
2.	Weight/Unit Length	gr/m	142 - 167	207 - 237	285 - 319	375 - 415	477 - 522	592 - 641	719 - 773	858 - 918
3.	Tensile Strength	N/mm ²	min 490	min 490	min 490	min 490	min 490	min 490	min 490	min 490
4.	Yield Strength	N/mm ²	min 400	min 400	min 400	min 400	min 400	min 400	min 400	min 400
5.	Elongation	%	min 8	min 8	min 8	min 8	min 8	min 8	min 8	min 8
B. Product / Wire Mesh										
1.	Type	unit	sheet	roll	sheet	roll	sheet	sheet	sheet	sheet
2.	Number of Line Wire	pcs	15	15	15	15	15	15	15	15
3.	Number of Cross Wire	pcs	36	360	36	360	36	36	36	36
4.	Pitch (Length x Width)	mm	150 x 150	150 x 150	150 x 150	150 x 150	150 x 150	150 x 150	150 x 150	150 x 150
5.	Dimension (Length x Width)	M	5.4 x 2.1	5.4 x 2.1	5.4 x 2.1	5.4 x 2.1	5.4 x 2.1	5.4 x 2.1	5.4 x 2.1	5.4 x 2.1
6.	Packaging	units/pcg	25	1	25	1	20	20	15	10



The background of the page is a photograph of an industrial facility, likely a steel mill, showing various pieces of machinery and structural elements. A large, solid red diagonal shape cuts across the image from the top right towards the bottom left, creating a modern, graphic design. The text is placed on the white background of the red shape.

With our ability to process materials that are assisted by the latest technology machines and qualified employees, proving that we can do all your requests.

Plate Services Center

Steel Services Center

Bar Services Center

Forming Services Center

Coil Services Center

Service Center

With facilities spanning over 40.500 sqm, the Steel Service Center (SSC) brings to you the highest quality of service in steel manufacturing and fabrication with the an advanced and precise computerized machines such as CNC sawing machines, CNC drilling, cutting, punching, bending machines, machines for galvanizing & shotblasting etc.

Together with Gunung Raja Paksi's mainstream products and experienced engineers of EFC, our customers are able to buy cut-to-length / cut-to-shape or custom steel fabrication to their requirement and international quality standards.

Products Serviced:

Angle (HR),
Cell Form,
Channel (UNP),
H-Beam (HR),
Honey Comb,
King Cross,
Queen Cross,
T-Beam,
Welded Beam,
Wide Flange,
Beam (IWF).

Service Provided:

Angle Line :

Cutting, Punching,
Stamping Angle Line

Special Operations : Bending,
Chamfering, Nothing

Beam Line : Bending, Cutting
(90o&45o), Drilling Copying
(Honey Comb) Painting
Shot Blasting

Welded Beam Line : Build Up
Beam, Tackling, Welding

Straightening Plate Service Center (PSC)

Forming Service Center (FSC)


Bar Service Center (BSC)

Steel Services Center (SSC)

Coil Service Center.



Coil Services Center

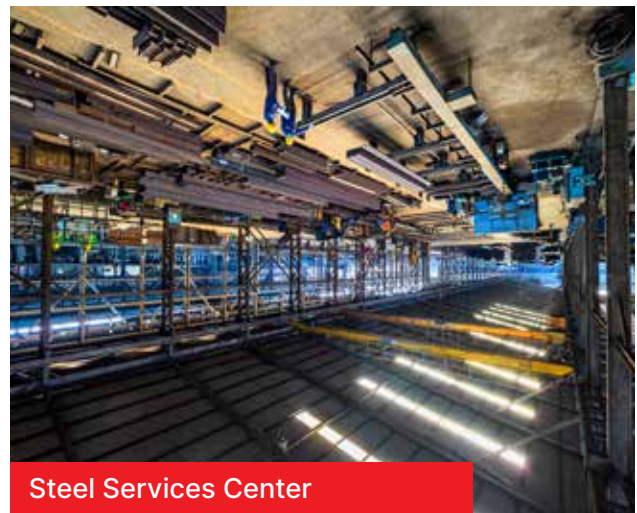

Steel Services Center



Forming Services Center



Bar Services Center







Steel Applications



Industrial Buildings:

Air Pollution Control
Equipment
Cement Plants
Chemical &
Petrochemical Plants
Factory
Iron & Steel Mills &
Wood Process
Warehouse
Workshop

Towers:

Transmission Tower
Substation Tower
Telecommunication Tower
Pole Tower
Monumental Tower
Billboard
Monitoring Tower
Wtertank Tower

High Rise Buildings:

Apartment
Hotel
Office Building
Landmark
Gas Processing & Distribution
Terminal & Cargo Handling System

Bridges:

Girdes Bridging
Truss Bridging
Cantilever Bridging
Arch Bridging
Suspension Bridging
Cable-stayed Bridging
Railway Bridging

Low Rise Buildings:

Housing / Residence
Hospital
Office Building
Airport / Hangar
School

Commercial Buildings:

Show Room
Supermarket & Hypermarket



C.T. 004/BBL
101 F3357420 - C 1-0-1
235 JR
40 x 430 x 5020
UP FABRICATION COOLING BET



GRP is very concerned about the quality of products and management system. This is evident from the many international certifications obtained such as **ISO 9001, ISO 14001, OHSAS 18001, SNI, ABS, JIS Marking, Bureau Varitas (BV), Lloyd Register (LR), BKI, Germanischer Lloyd (GL), Det Norske Veritas (DNV), Nippon Kaiji Kyokai (NK)**, and others.



Certifications





Thank you for choosing GRP as a solutions to your steel requirements.

We are confident that our products and services excellence shall satisfy your requirements and our partnership will continue to grow.



Website GRP



Catalogue GRP





SHAPING TOMORROW

PT Gunung Raja Paksi Tbk

Jl. Perjuangan No.8
Sukadanau, Cikarang Barat
Bekasi 17530
West Java, Indonesia

Phone: +62 21 890-0111

Fax: +62 21 890-0555

